
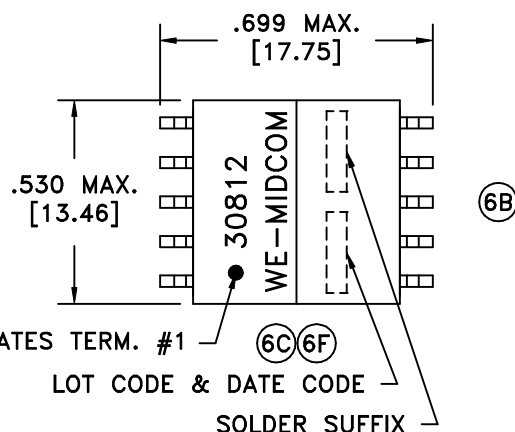



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6F)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1


LOT CODE & DATE CODE

SOLDER SUFFIX

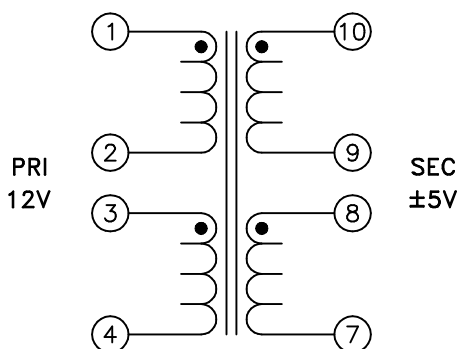

Tie terminals 9+8, 2+3 on PC Board

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

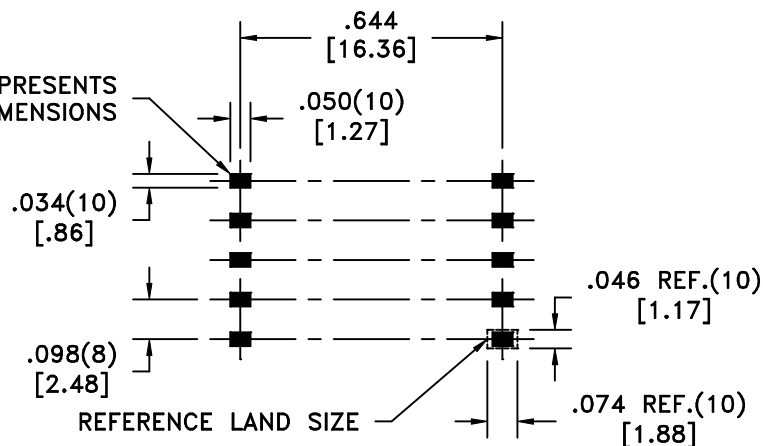

CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):	1-2, 0.290 ohms max.
	3-4, 0.290 ohms max.
	10-9, 0.230 ohms max.
	8-7, 0.230 ohms max.
DIELECTRIC RATING:	500VDC for 1 second between PRI-SEC.
INDUCTANCE:	600uH min., 10kHz, 100mVAC, 1-2, Ls.
(6F) TURNS RATIO:	(1-2):(3-4) = 1:1, ±1%. (1-2):(10-9) = 1.5:1, ±1%. (1-2):(8-7) = 1.5:1, ±1%.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005[.13]	DRAWING TITLE TRANSFORMER		
	eiSos p/n: REVISIONS: SEE SHEET 1	DRAWING NO. 30812R/-LF1	REV. 6F 7/06

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

REVISIONS: SEE SHEET 1

SCALE ---

SHEET 2 OF 5

DWG.# 30812R/-LF1