



30CPQ035PbF
30CPQ040PbF
30CPQ045PbF

SCHOTTKY RECTIFIER

30 Amp

$$I_{F(AV)} = 30\text{Amp}$$
$$V_R = 35/45\text{V}$$

Major Ratings and Characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	30	A
V_{RRM}	35/45	V
I_{FSM} @tp=5μs sine	1020	A
V_F @15Apk, $T_J=125^{\circ}\text{C}$ (per leg)	0.50	V
T_J	-55 to 150	$^{\circ}\text{C}$

Description/ Features


The 30CPQ...PbF center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

Case Styles



TO-247AC



Voltage Ratings

Part number	30CPQ035PbF	30CPQ040PbF	30CPQ045PbF
V_R Max. DC Reverse Voltage (V)	35	40	45
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters		30CPQ...	Units	Conditions		
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	30	A	50% duty cycle @ $T_c = 124^\circ\text{C}$, rectangular wave form		
I_{FSM}	Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	1020	A	5 μs Sine or 3 μs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied	
		265		10ms Sine or 6ms Rect. pulse		
E_{AS}	Non-Repetitive Avalanche Energy (Per Leg)	20	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 3$ Amps, $L = 4.4$ mH		
I_{AR}	Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical		

Electrical Specifications

Parameters		30CPQ...	Units	Conditions	
V _{FM}	Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.54	V	@ 15A	T _J = 25 °C
		0.68	V	@ 30A	
		0.50	V	@ 15A	T _J = 125 °C
		0.64	V	@ 30A	
I _{RM}	Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.75	mA	T _J = 25 °C	V _R = rated V _R
		70	mA	T _J = 125 °C	
C _T	Max. Junction Capacitance (Per Leg)	900	pF	V _R = 5V _{DC} (test signal range 100Khz to 1Mhz) 25°C	
L _S	Typical Series Inductance (Per Leg)	7.5	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change	10000	V/ μs	(Rated V _R)	

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters		30CPQ...	Units	Conditions
T _J	Max. Junction Temperature Range	-55 to 150	°C	
T _{stg}	Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Leg)	2.20	°C/W	DCoperation * See Fig. 4
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Package)	1.10	°C/W	DCoperation
R _{thCS}	Typical Thermal Resistance, Case to Heatsink	0.24	°C/W	Mounting surface , smooth and greased
wt	Approximate Weight	6(0.21)	g(oz.)	
T	Mounting Torque	Min. 6(5)	Kg-cm (lbf-in)	Non-lubricated threads
		Max. 12(10)		
CaseStyle		TO-247AC(TO-3P)		JEDEC
Device Marking		30CPQ035		
		30CPQ040		
		30CPQ045		

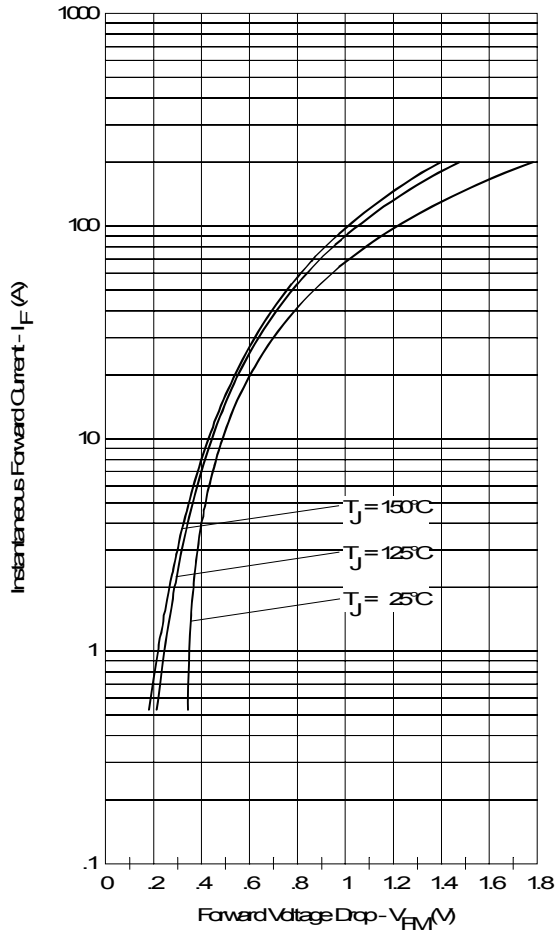


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

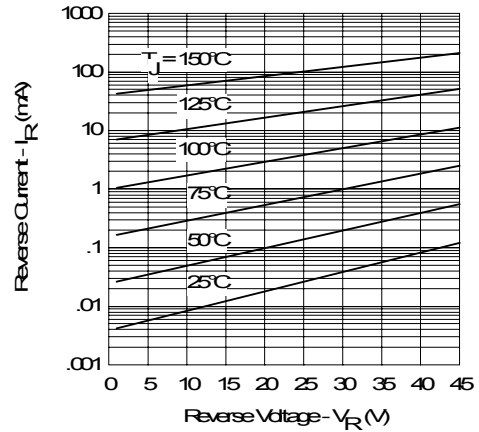


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

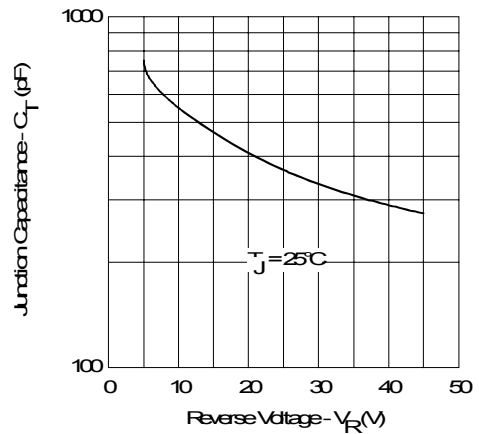


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

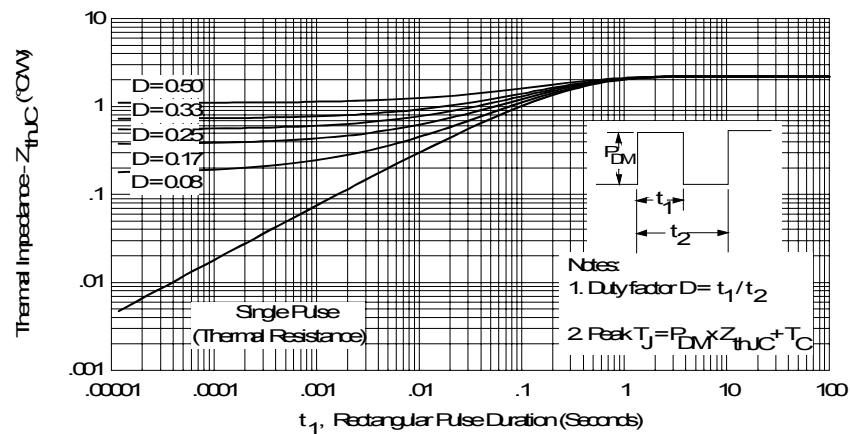


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

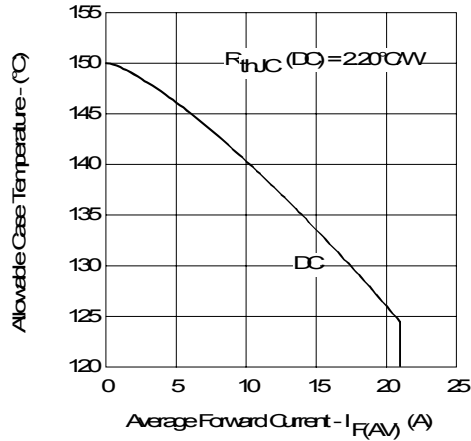


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

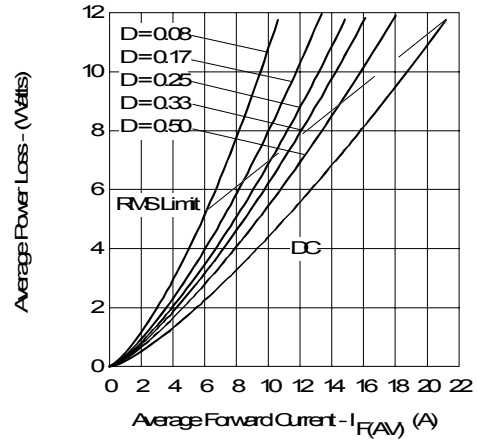


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

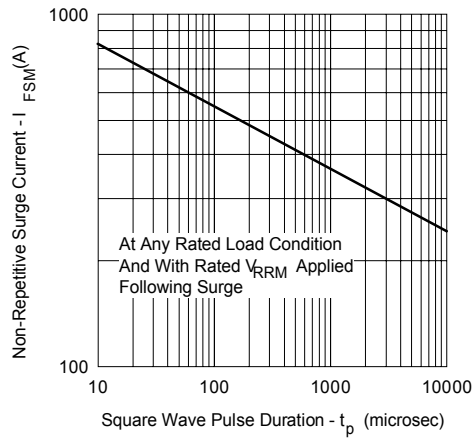


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)



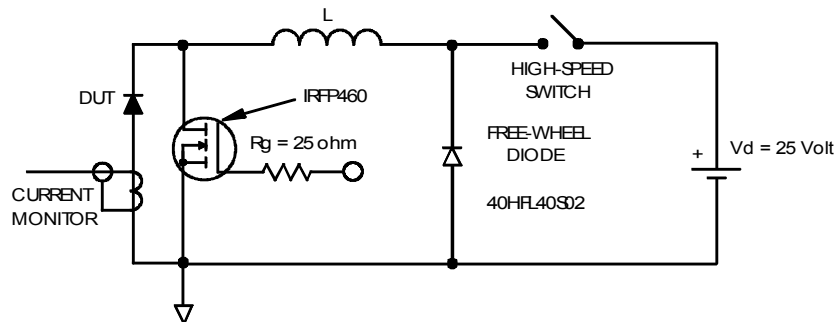


Fig. 8 - Unclamped Inductive Test Circuit

Outline Table

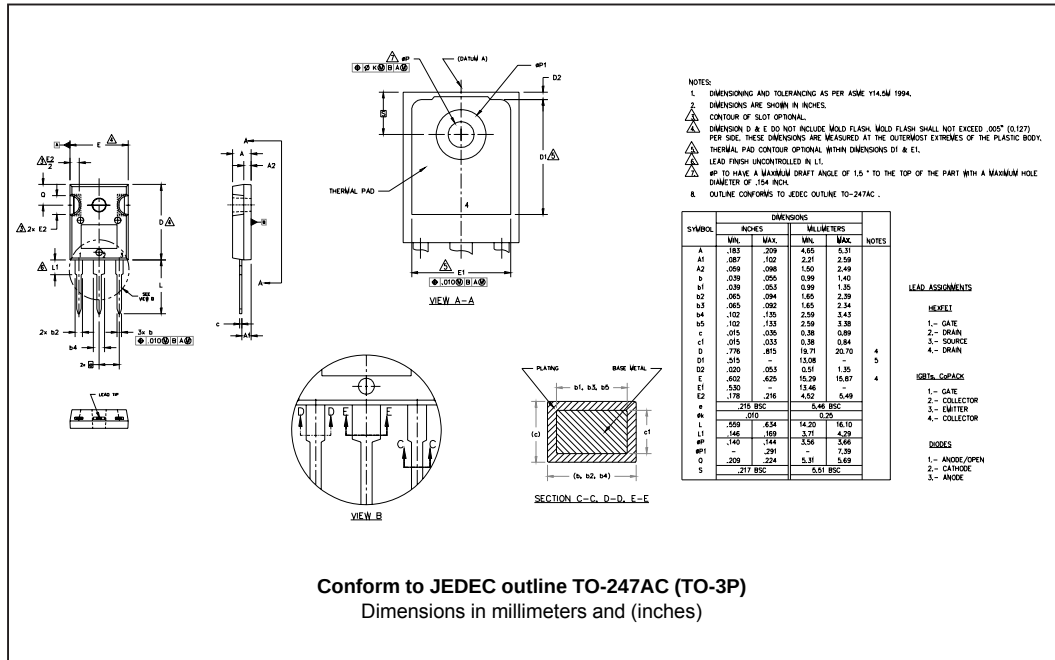

Marking Information

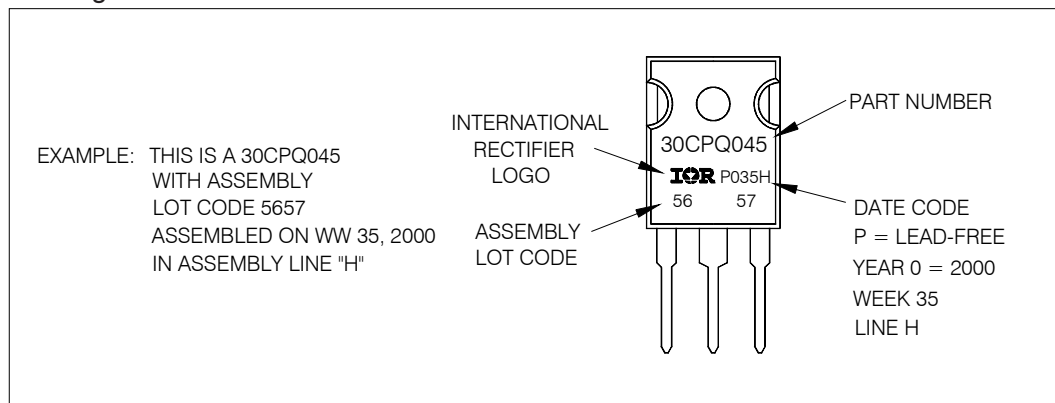

Ordering Information Table

Device Code					
	30	C	P	Q	045 PbF
	1	2	3	4	5 6
1	- Current Rating (30 = 30A)				
2	- Circuit Configuration				
	C = Common Cathode				
3	- Package				
	P = TO-247				
4	- Schottky "Q" Series				
5	- Voltage Code				
6	- • none = Standard Production				
	• PbF = Lead-Free				
					035 = 35V 040 = 40V 045 = 45V
Tube Standard Pack Quantity : 25 pieces					

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.