

APPLICATIONS

- ✓ Relay Drives
- ✓ Motor (Start/Stop) Back EMF Protection
- ✓ Module Lightning Protection
- ✓ Secondary Lightning Protection for AC/DC

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-5 (Surge): 48A, 8/20 μ s - L3 (Line-Gnd), L4 (Line-Line) & L1 (Power)

FEATURES



- ✓ 30,000 Watts Peak Pulse Power per Line ($t_p=10/1000\mu$ s)
- ✓ Unidirectional & Bidirectional Configurations
- ✓ Easy Mounting to Printed Circuit Board
- ✓ Available in Multiple Voltage Types Ranging From: 30V to 360V
- ✓ $t_{clamping}$ (0V to V_{BR} Min.) < 100ps, Theoretical for Unidirectional and < 5ns for Bidirectional
- ✓ RoHS Compliant

MECHANICAL CHARACTERISTICS

- ✓ Molded Case
- ✓ Weight 5 grams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ Marking: Logo, Part Number & Date Code
- ✓ Positive Terminal Marked with Band - *Unidirectional Only*

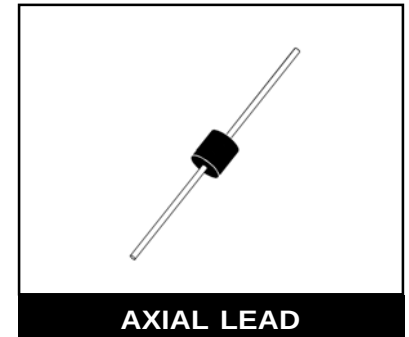

PIN CONFIGURATIONS



30KPA30A thru 30KPA360CA

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 10/1000µs) - See Fig. 1	P _{PP}	30,000	Watts
Forward Surge Rating (1/20 seconds) - See Note 2	I _F	200	Amps
Steady State Power Dissipation	P _P	1.0	Watts
Storage Temperature	T _{STG}	-55 to 150	°C
Operating Temperature	T _L	-55 to 150	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
UNIDIRECTIONAL PART NUMBER (Notes 1 & 2)	BIDIRECTIONAL PART NUMBER (Note 1)	RATED STAND-OFF VOLTAGE V _{WM} VOLTS	BREAKDOWN VOLTAGE		MAXIMUM LEAKAGE CURRENT @V _{WM} I _D µA	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 10/1000µs V _C @ I _{PP}	TEMPERATURE COEFFICIENT OF V _(BR) qV _(BR) mV/°C
			MIN V _(BR) VOLTS	@I _T mA			
30KPA30A	30KPA30CA	30.0	33.3	50	5000	55.2V @ 543.0A	34
30KPA33A	30KPA33CA	33.0	36.7	50	5000	58.6V @ 512.0A	39
30KPA36A	30KPA36CA	36.0	40.0	50	2000	61.8V @ 485.0A	41
30KPA43A	30KPA43CA	43.0	47.8	50	1000	73.0V @ 410.0A	50
30KPA48A	30KPA48CA	48.0	53.3	5	250	77.4V @ 388.0A	56
30KPA58A	30KPA58CA	58.0	64.4	5	20	92.4V @ 325.0A	68
30KPA64A	30KPA64CA	64.0	71.1	5	10	104.0V @ 294.0A	76
30KPA70A	30KPA70CA	70.0	77.8	5	10	109.0V @ 274.0A	83
30KPA75A	30KPA75CA	75.0	83.3	5	10	119.4V @ 251.0A	89
30KPA90A	30KPA90CA	90.0	100.0	5	10	147.0V @ 206.0A	109
30KPA100	30KPA100C	100.0	111.0	5	10	179.0V @ 168.0A	134
30KPA100A	30KPA100CA	100.0	111.0	5	10	162.0V @ 186.0A	121
30KPA130A	30KPA130CA	130.0	144.0	5	10	209.0V @ 142.0A	157
30KPA160A	30KPA160CA	160.0	178.0	5	10	252.6V @ 119.0A	195
30KPA170A	30KPA170CA	170.0	189.0	5	10	275.0V @ 110.0A	207
30KPA180A	30KPA180CA	180.0	200.0	5	10	291.0V @ 104.0A	230
30KPA220A	30KPA220CA	220.0	245.0	5	10	356.0V @ 84.0A	269
30KPA260A	30KPA260CA	260.0	289.0	5	10	416.0V @ 72.0A	317
30KPA280A	30KPA280CA	280.0	311.0	5	10	464.0V @ 65.0A	342
30KPA300A	30KPA300CA	300.0	334.0	5	10	484.0V @ 62.0A	368
30KPA320A	30KPA320CA	320.0	356.0	5	10	530.0V @ 57.0A	370
30KPA360A	30KPA360CA	360.0	400.0	5	10	640.0V @ 55.0A	380

Note 1: Devices shown are preferred voltages. Contact factory for additional voltages.

Note 2: V_F = 15 Volts @ 200A, 8.3ms (1/2 Sine Wave) - unidirectional devices only.

GRAPHS

FIGURE 1
PEAK PULSE POWER VS PULSE TIME

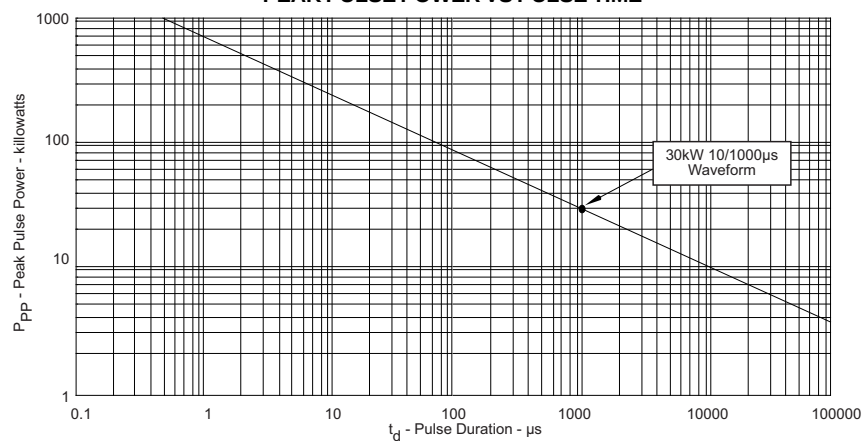


FIGURE 2
PULSE WAVE FORM



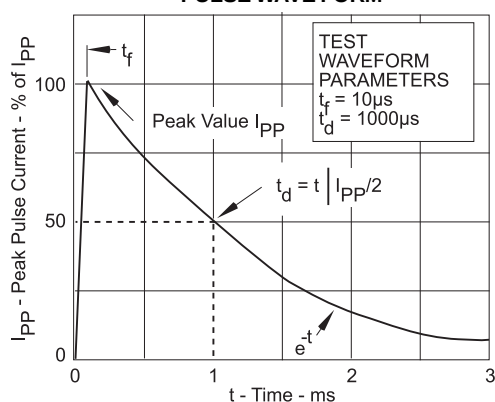


FIGURE 3
POWER DERATING CURVE

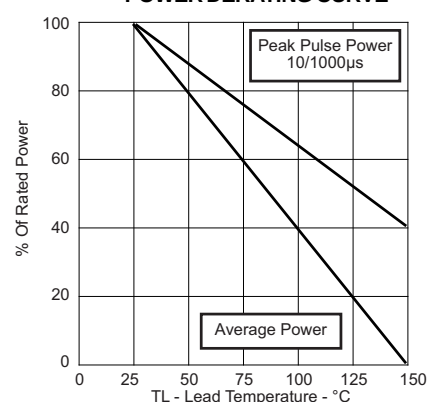

30KPA30A thru 30KPA360CA

AXIAL LEAD PACKAGE OUTLINE & DIMENSIONS

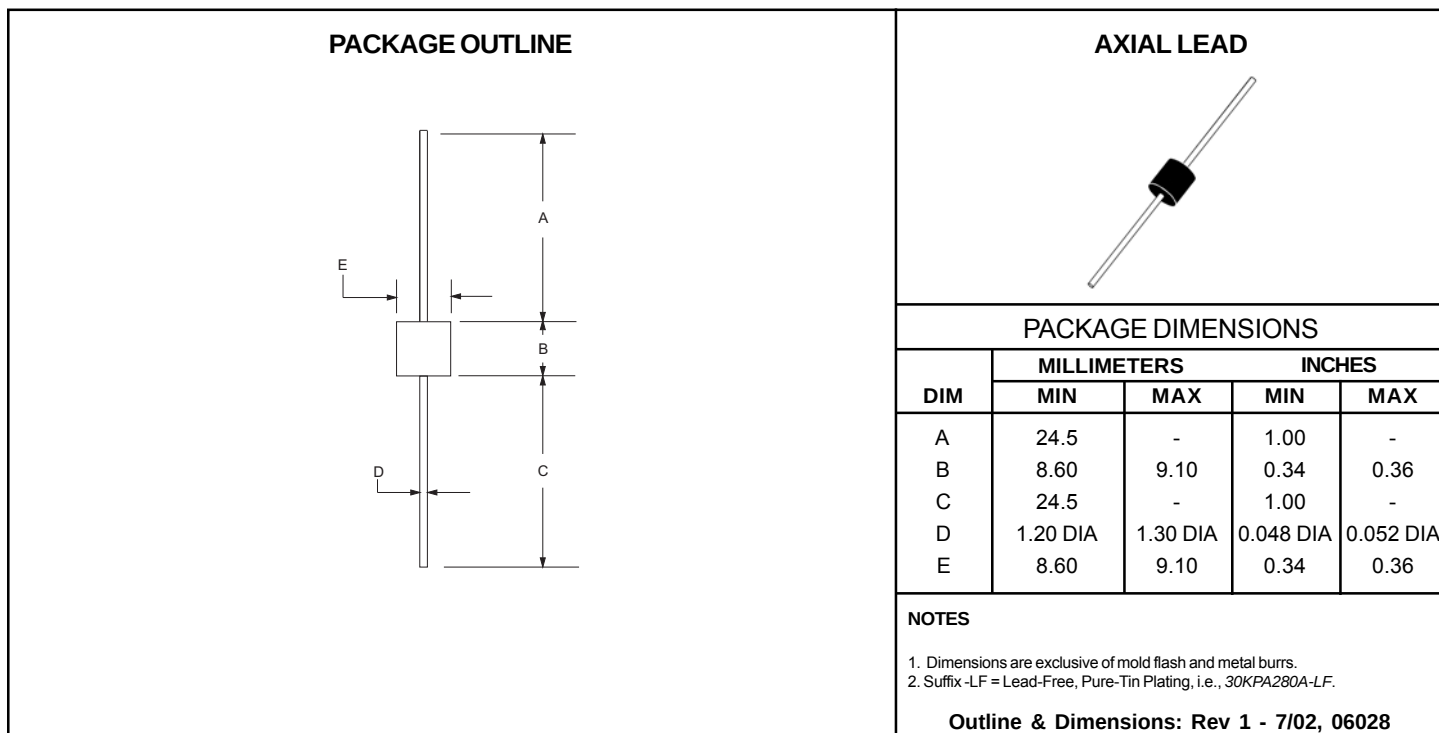

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: sales@protekdevices.com

Web Site: www.protekdevices.com