


NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BERYLLIUM COPPER, SILVER PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 2 GHz
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. MAX. PANEL THICKNESS=6.35mm




THIRD ANGLE PROJ. 

REVISIONS



REV	DESCRIPTION	DATE	ECO	APPR
P	STAMP "AMPHENOL" WAS "74868" \RD-DM12033001R3	12/2012	48876	

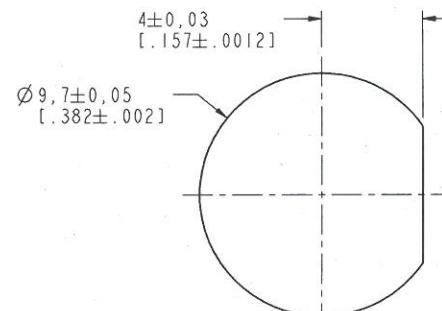

SCALE 5.000
RECOMMENDED
MOUNTING HOLE

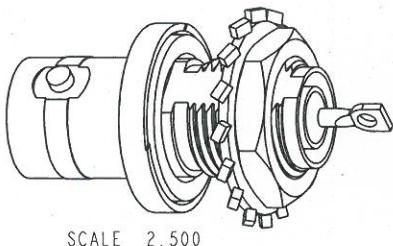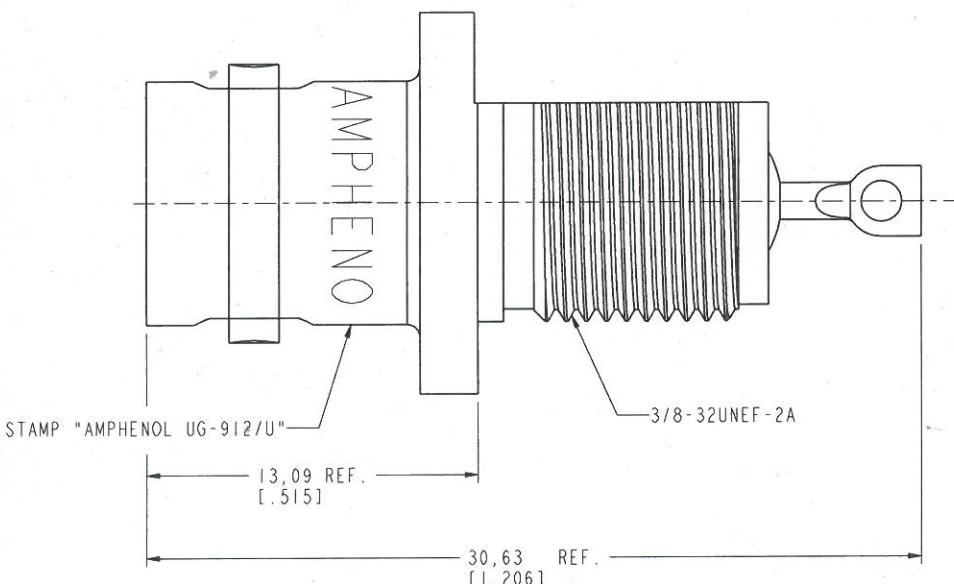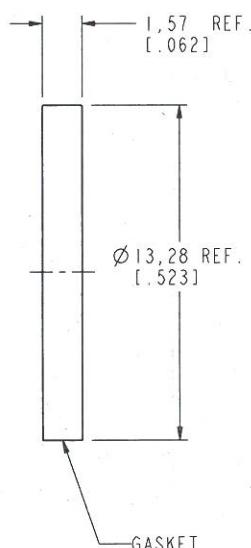

SCALE 2.500

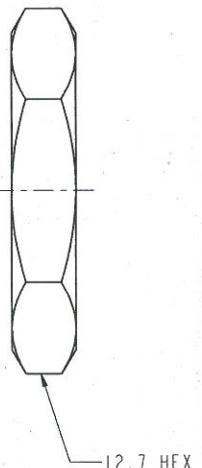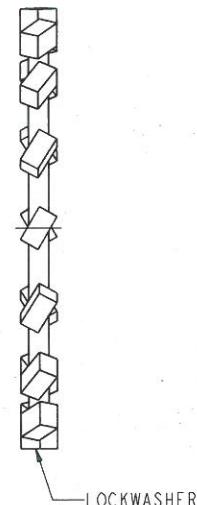

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES
± 0.05mm ± 0.1mm ± 0.2mm ± 0.3mm ± 1°

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp.; (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone, for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN R.MAO	DATE 06-Mar-12	TITLE TYPE BNC RECEPTACLE PRESSURIZED UG-912/U	Amphenol RF www.amphenolrf.com
	ENGINEER T.AUBIN	DATE 06-Mar-12		
REFERENCE EAR # AND CONFIGURATION LEVEL: <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	APPROVED S.HSIEH	DATE 06-Mar-12	DRAWING NO.: 31-238	ITEM NO. 31-238
	CAD FILE	SCALE: 5.0:1.0 SHEET 2 OF 2		
FINISH	DWG SIZE B	REV P		PART NO. 31-238

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[31-238](#)