

# IP67 Sealed Toggle Switches

Highest quality for the most demanding applications



## 3000 Series

Standard 15/32" diameter bushing. Standard Bat length is .560".

| Current Rating          | Catalog No. |       | Action           | Termination              |
|-------------------------|-------------|-------|------------------|--------------------------|
| 15A -125VAC, 10A-250VAC | 3005C       | Fig 1 | SPST on-none-off | .250" QC                 |
| 15A -125VAC, 10A-250VAC | 3005D       | Fig 2 | SPST on-none-off | 6" Wire Leads, #16 Gauge |
| 15A -125VAC, 10A-250VAC | 3001C       | Fig 1 | SPDT on-none-on  | .250" QC                 |
| 15A -125VAC, 10A-250VAC | 3001D       | Fig 2 | SPDT on-none-on  | 6" Wire Leads, #16 Gauge |
| 15A -125VAC, 10A-250VAC | 3002C       | Fig 1 | SPDT on-off-on   | .250" QC                 |
| 15A -125VAC, 10A-250VAC | 3002D       | Fig 2 | SPDT on-off-on   | 6" Wire Leads, #16 Gauge |

### 3000 Series Toggle

**Electrical Rating:** 15A - 125 VAC , 10A - 250 VAC

**Life Cycles:** 100,000 Electrical 100,000 Mechanical

**Operating Temp:** -10 °C to +65 °C

**Sealing:** seal tested per IP67 standards to withstand submersion in water to a depth of 1 meter for 30 minutes, Meets IP68

**Dielectric Strength** 1000 Volts RMS Minimum

**Mounting Means** 15/32" Bushing, Keyway .078 - .083 Wide X .037 - .043 Deep, Standard Hardware supplied

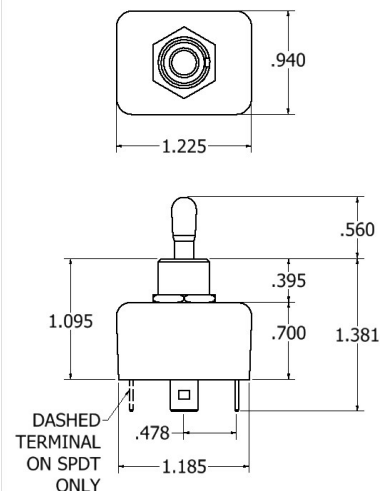


Fig 1



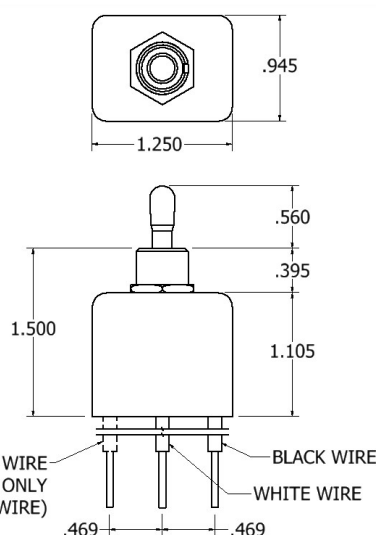


Fig 2

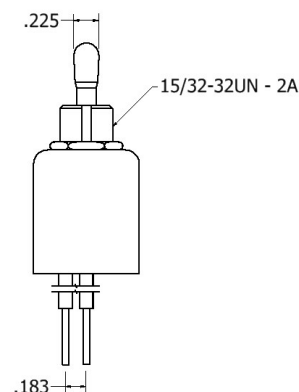

All Information subject to change without notice

Flier EEP-SG-15 RevA ©Copyright Electroswitch 2014