
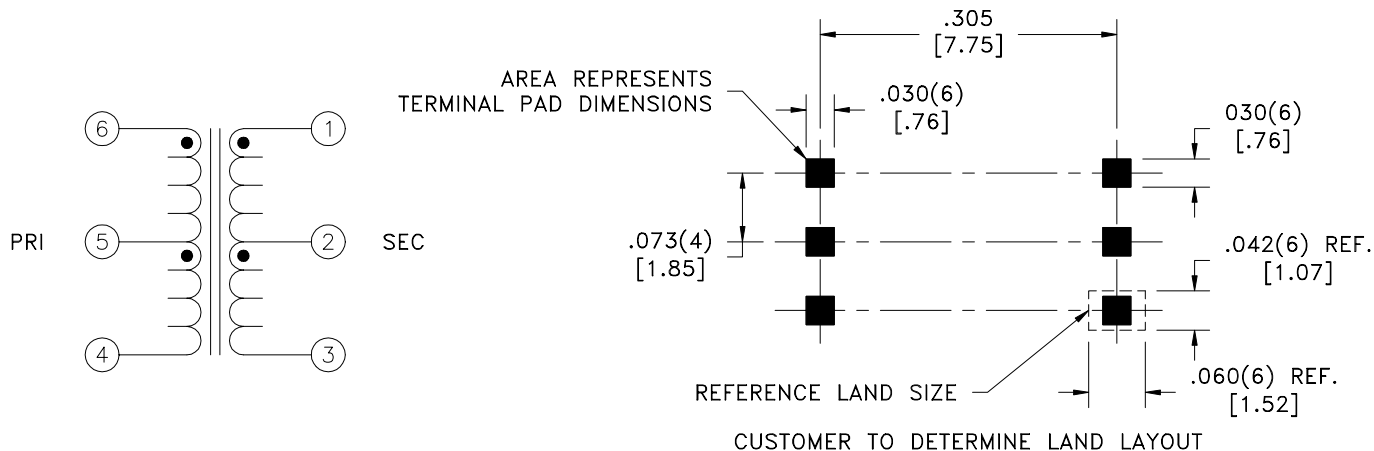


TERM. NO.'s FOR REF. ONLY

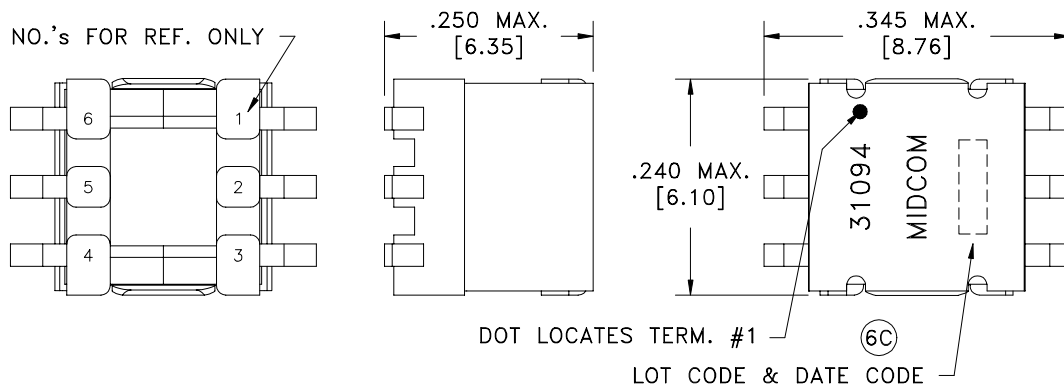

6D

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):

- 6-5, 1.44 ohms max.
- 5-4, 1.44 ohms max.
- 1-2, 1.64 ohms max.
- 2-3, 1.64 ohms max.

DIELECTRIC RATING: 1250VDC, 1 minute tested by applying 1500VDC for 1 second between PRI-SEC.

INDUCTANCE: 882uH min., 10kHz, 100mVAC, 6-5, Ls.

URNS RATIO:

- (5-4):(6-5) = 1:1, ±1%.
- (1-3):(6-4) = 1:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc.

Watertown, SD USA
Toll Free: 800-643-2661
Fax: 605-886-4486

Unless otherwise specified:
Tolerances: Fractions: $\pm 1/64$
Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13]

DRAWING TITLE

TRANSFORMER

REVISIONS: SEE SHEET 1

Midcom

DRAWING NO.

31094R

REV.

6D
6/05

SCALE ---

SHEET 2 OF 5

This drawing is dual dimensioned.
Dimensions in brackets are in
millimeters.

DWG #
31094R