


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
LF1	Sn96%, Ag4%	Yes	Yes

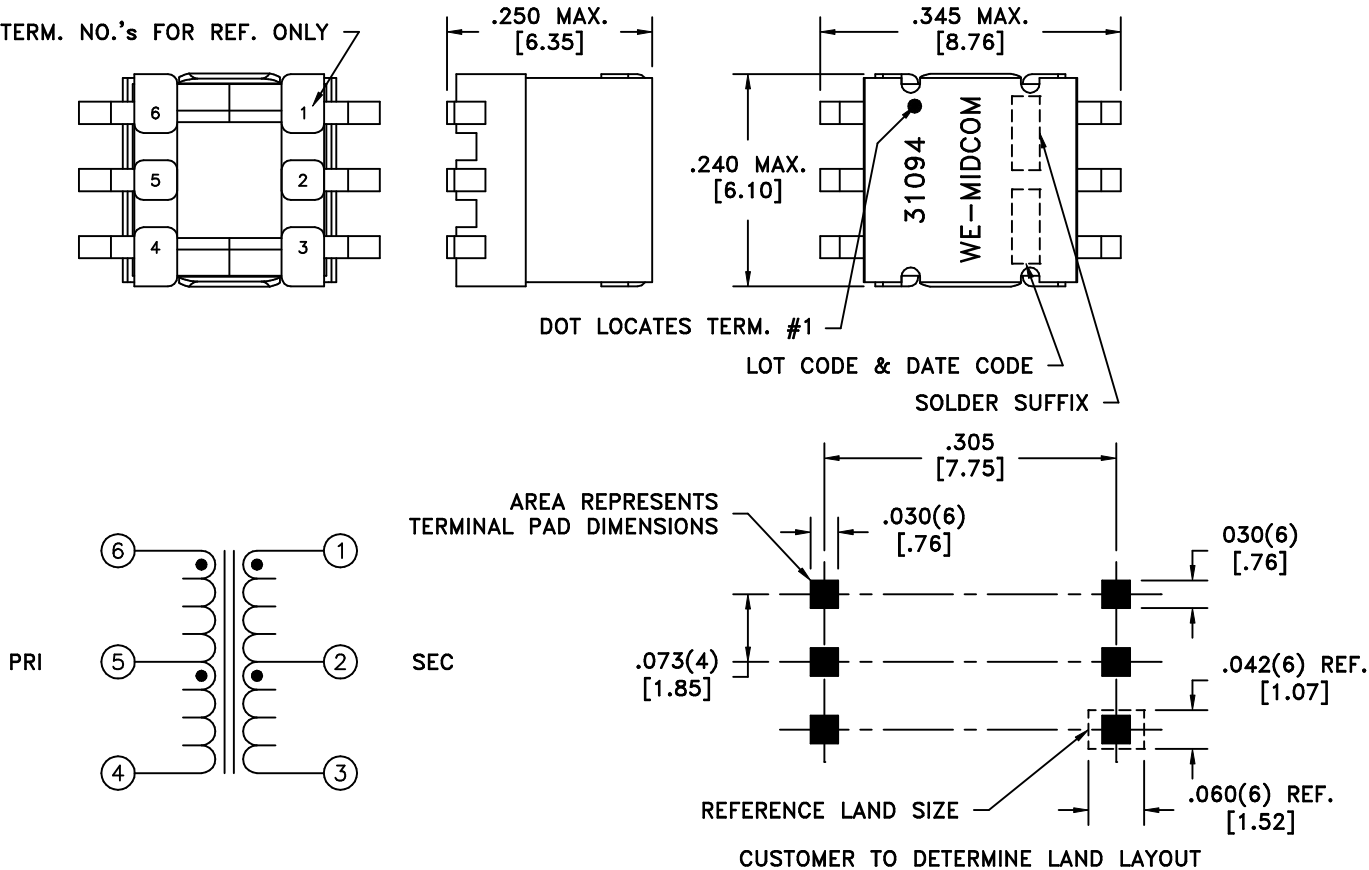

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):	6-5, 1.80 ohms ±10%. 5-4, 1.80 ohms ±10%. 1-2, 2.05 ohms ±10%. 2-3, 2.05 ohms ±10%.
DIELECTRIC RATING:	1250VDC, 1 minute tested by applying 1500VDC for 1 second between PRI-SEC.
INDUCTANCE:	882uH min., 10kHz, 100mVAC, 6-5, Ls.
URNS RATIO:	(5-4):(6-5) = 1:1, ±1%. (1-3):(6-4) = 1:1, ±1%.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals:±.005[.13]	DRAWING TITLE TRANSFORMER		 www.midcom-inc.com	DWG.# 31094R-LF1
	eiSos p/n: 750031094		DRAWING NO. 31094R-LF1	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		REVISIONS: SEE SHEET 1	SCALE ---	REV. 6A 6/07 SHEET 2 OF 5