


METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP	E13288 Listed
WIRE RANGE	
22-16 AWG STRANDED	22-16 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

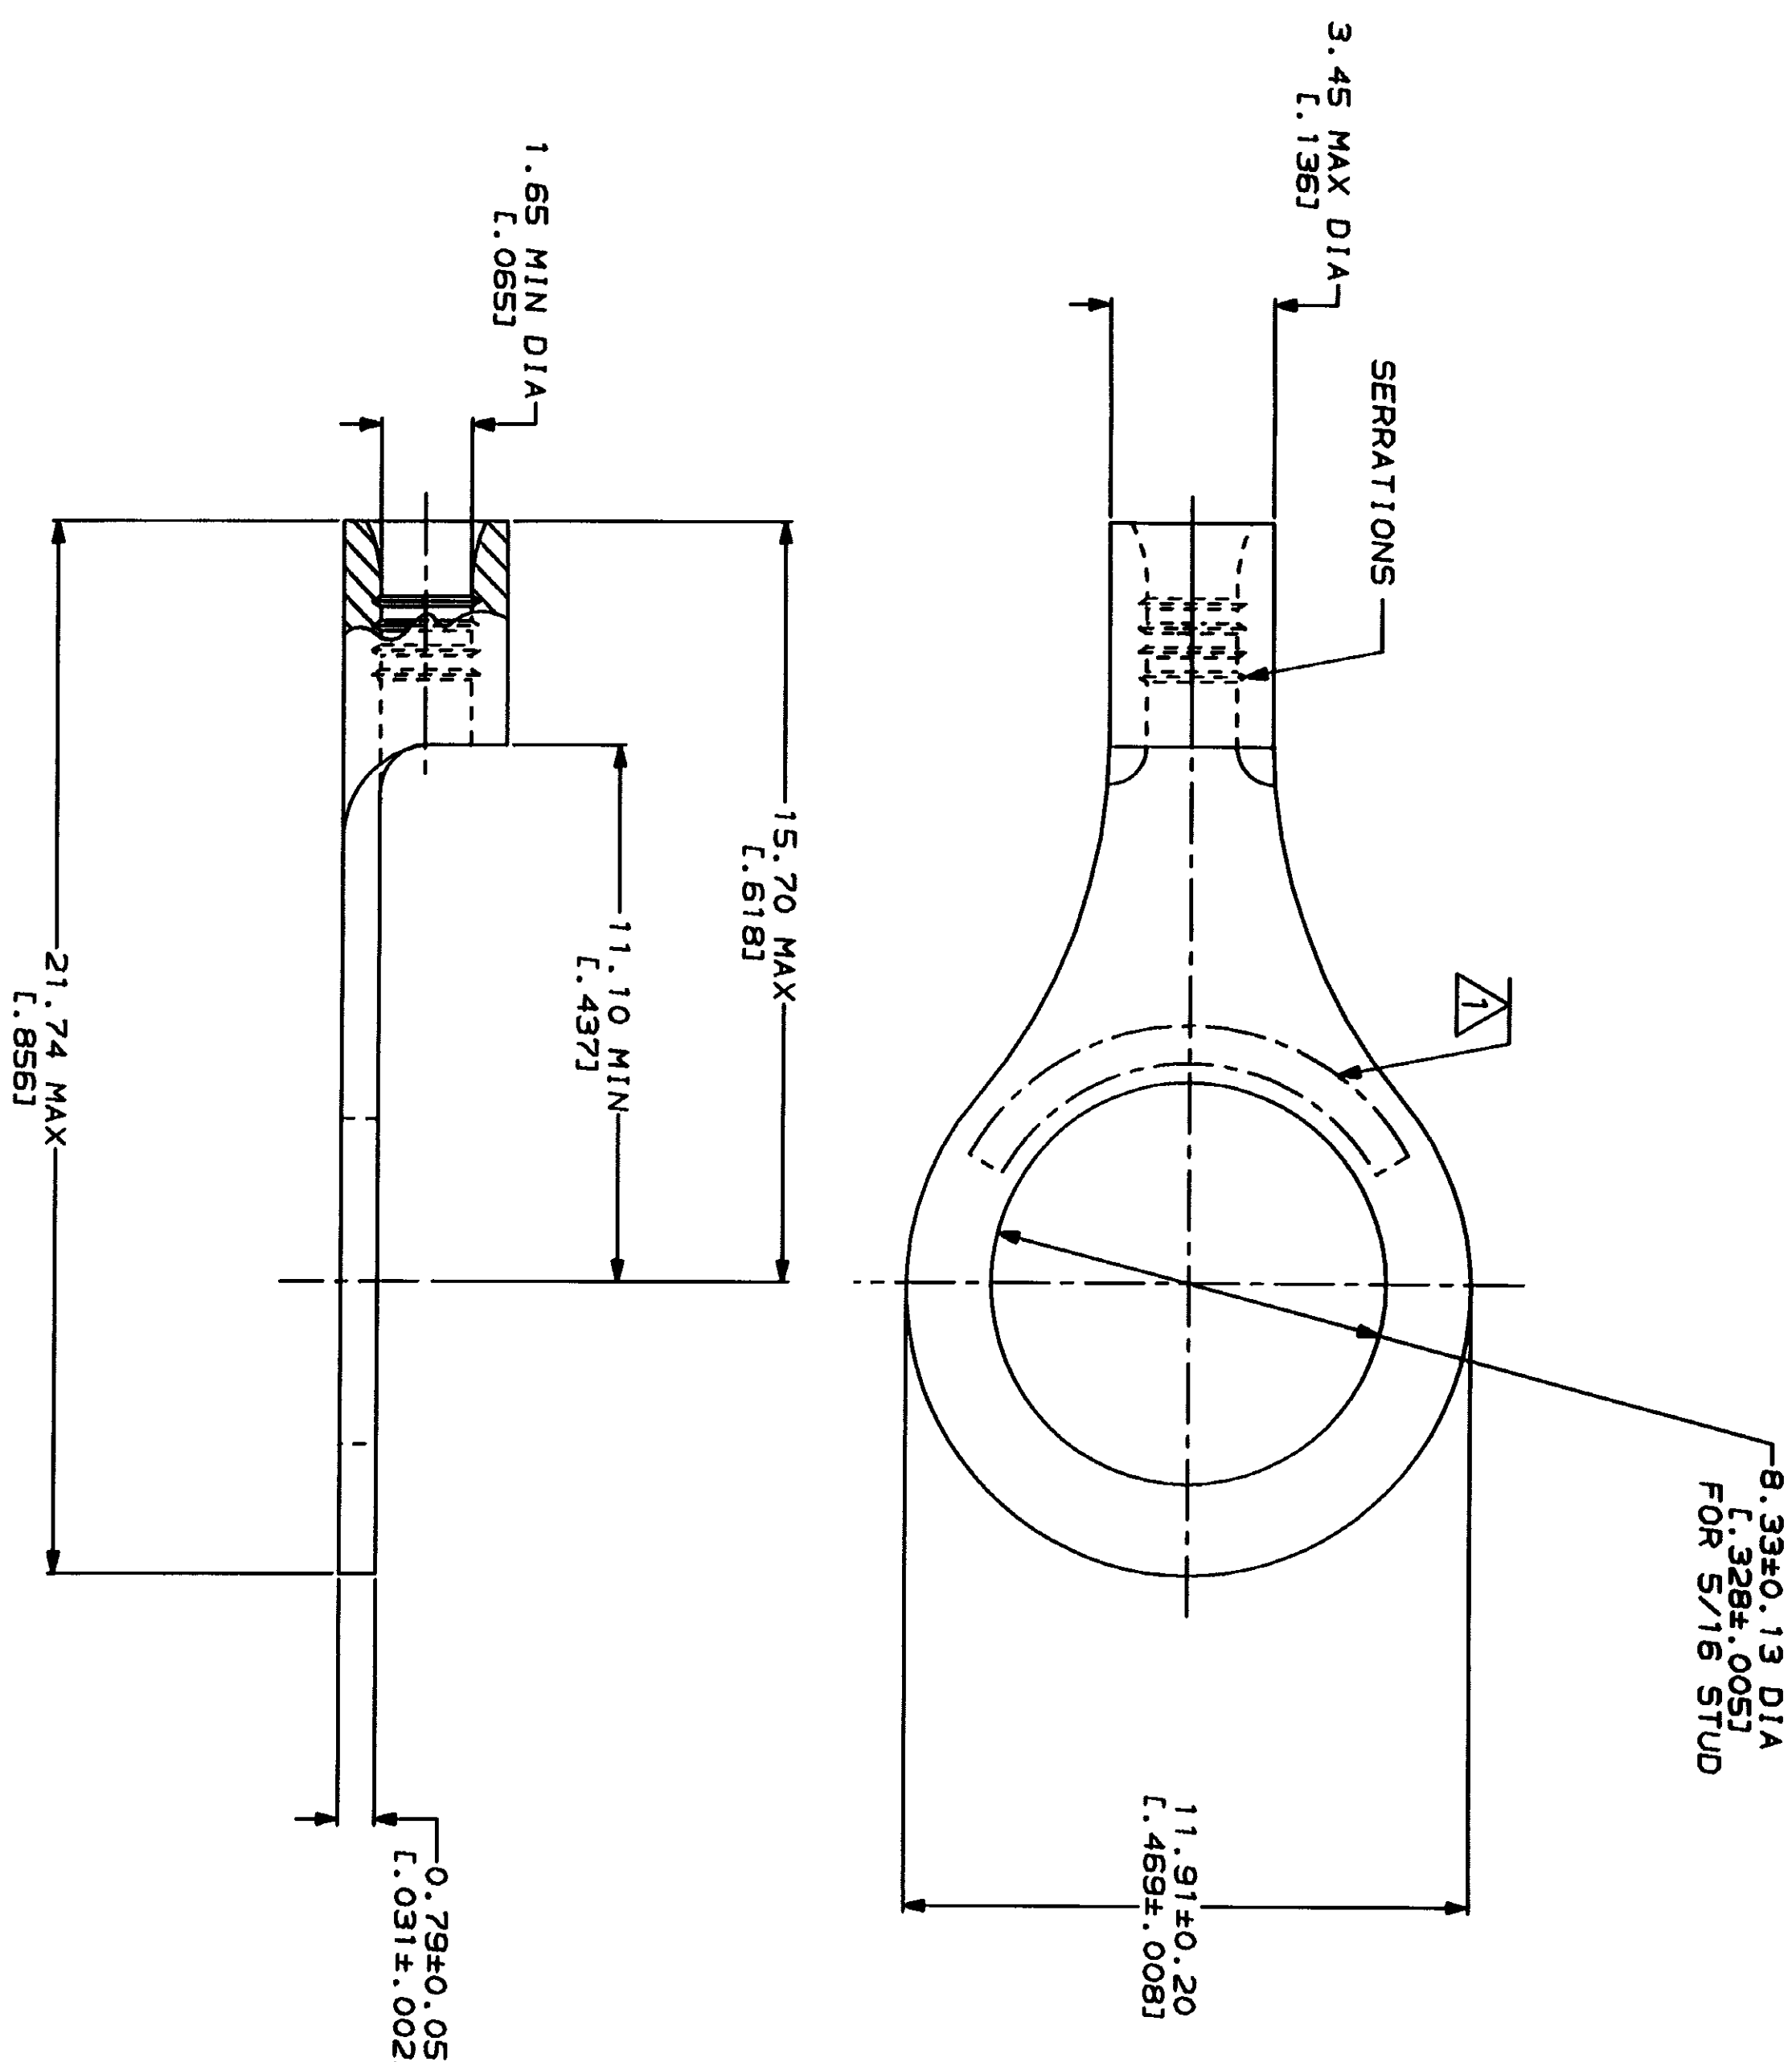

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

FOR APPLICATION
TOOLING INFORMATION

FOR ORDER ENTRY

PRODUCT INFORMATION CENTER
1-800-522-6752

TOOLING ASSISTANCE CENTER
1-800-722-1111

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² (509-3,260) CIR MILS
STRANDED

THIS DRAWING IS A TECHNICAL DOCUMENT FOR
THE CONTRACTING AND MANUFACTURING COMMUNITIES.
IT SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES— TOLERANCES ON: 2 PLC DEC ± .005 3 PLC DEC ± .002 ANGLES ± .005	DR 2-3-93 TA BRIKMAN CHK 2-3-93 DA PATTERSON APPD 2-3-93 DE MILLER APPD 2-3-93 JL MECKLEY PRODUCT SPEC	NAME AMP Incorporated Harrisburg, PA 17105-3608
FINISH TIN PLATE 0.00254(0.000100) MIN THK PER MIL-T-10727	APPLICATION SPEC	TERMINAL, RING TONGUE, BUDGET
WEIGHT	SCALE 8:1	

5000	ON TAPE	3-31173-3
---	LOOSE PIECE	31173
QUANTITY	PACKAGE TYPE	PART NO