


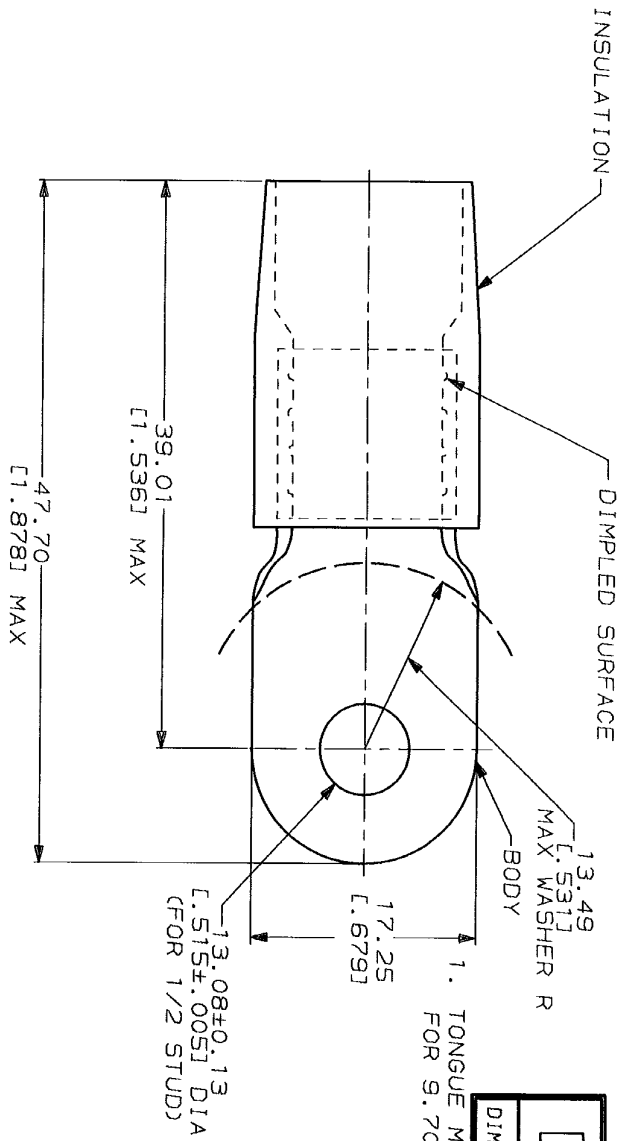

AMP

WIRE RANGE

4 AWG

STRANDED

METRIG

DIMENSIONS LISTED IN mm [INCHES]

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE:	105°C	DO NOT SCALE PRINT. UNLESS SPECIFIED TOLERANCES ON: 2 PLG DEC ± 0.20 (0.008) 3 PLG DEC ± 0.20 (0.008) 3 PLG DEC ± 0.20 (0.008)	DR 6/93 SS GOLDEN CHK 6/93 R RESEY APPO 6/93 M ELLIS	PACKAGE TYPE	LOOSE PC	PART NO	324114
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	1-800-522-6752	VOLTAGE RATING:	-	MATERIAL COPPER PER ASTM B-152 NILON (MIL-M-20693) TYPE 1 COLOR: YELLOW	APPO 6/93 M ELLIS	NAME	AMP	AMP Incorporated	Harrisburg, PA 17105-3608
FOR APPLICATION	TOOLING ASSISTANCE CENTER	CIRCULAR MIL AREA:	16.8-26.7mm² (33.100-52.600)	FINISH	TIN PLATE PER MIL-T-10727	PRODUCT SPEC	APPLICATION SPEC	SIZE	00779
TOOLING INFORMATION	1-800-722-1111	STRANDED						CAGE CODE	00779
FOR ORDER ENTRY	1-800-526-5142							DRAWING NO	00779
								SCALE	1 OF 1

AMP 1420-15 REV 3-92

19 AUG 1993

13:50:02

AMP12368

<UJ1284>DEPT1132>U.DWG1132>U.RBY>U.TERM1NVL>U.CUST

CUSTOMER DRAWING