

Wiha ESD Safe Pliers & Cutters

Precision Cutters Wide Tapered Head

Bevel



#32706 Precision Cutters, Wide Tapered Head, Bevel


Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32706	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.4	11.0mm	1	.20

[SHOP](#)

Precision Cutters Wide Tapered Head

Flush



#32708 Precision Cutters, Wide Tapered Head, Flush


Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32708	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.2	11.0mm	1	.19

[SHOP](#)

Precision Cutters Wide Tapered Head

Full Flush



#32710 Precision Cutters, Wide Tapered Head, Full Flush


Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32710	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.0	11.0mm	1	.23

[SHOP](#)

Precision Cutters Wide Tapered Head

Flush



#32711 Precision Cutters, Wide Tapered Head With Wire Trapping Device, Flush



Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32711	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.2	11.0mm	1	.19

[SHOP](#)

Precision Cutters Slim Oval Form

Flush

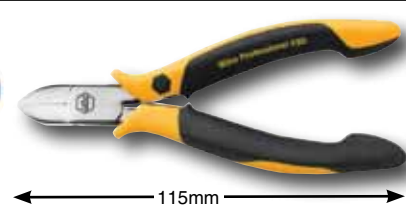

#32712 Precision Cutters, Slim Oval Head, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32712	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.0	10.5mm	1	.23

[SHOP](#)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Wiha:

[32710](#) [32712](#) [32711](#) [32708](#) [32706](#)