

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 843956



LOC	DIST			REVISIONS			
G	14	P	F	ZONE	LTR	DESCRIPTION	DATE
					M1	REVISED PER ECR 06-014478	14JUN06

METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	 E13288 Listed
6 AWG SOLID OR STRANDED	6 AWG STRANDED
 LR7189 Certified	MILITARY P/N AND CLASS
6 AWG SOLID OR STRANDED	MS 20659-110 CLASS 2 33467 ONLY

 STAMP AMP 6* APPROX AS SHOWN

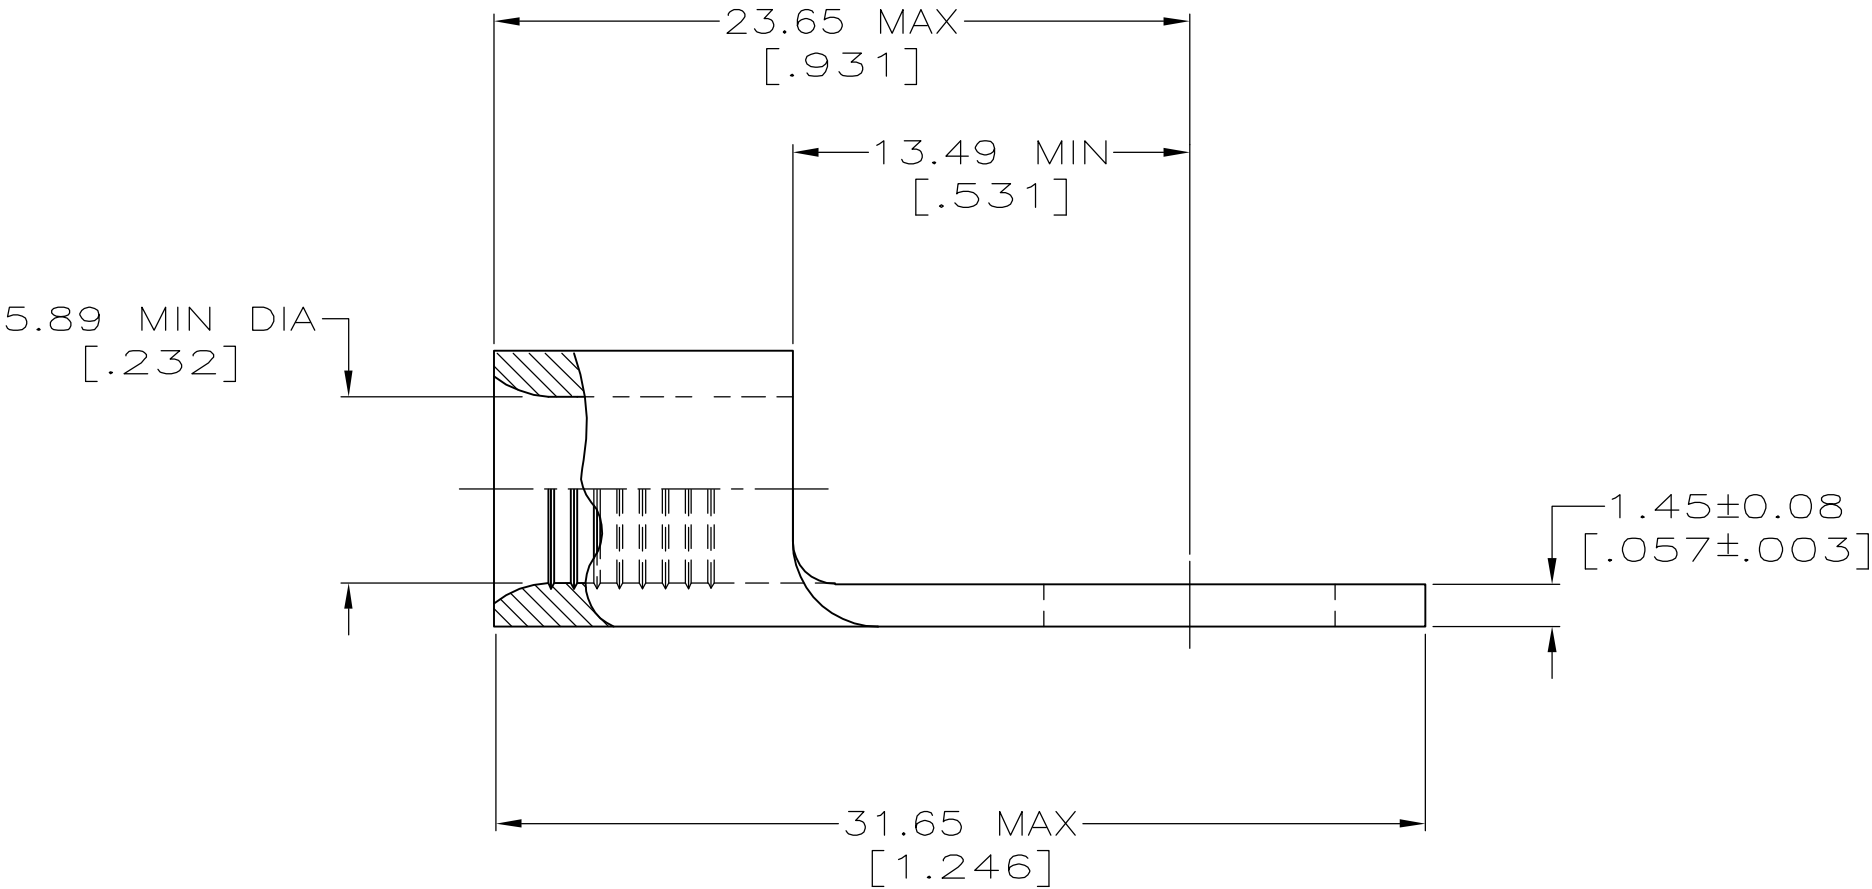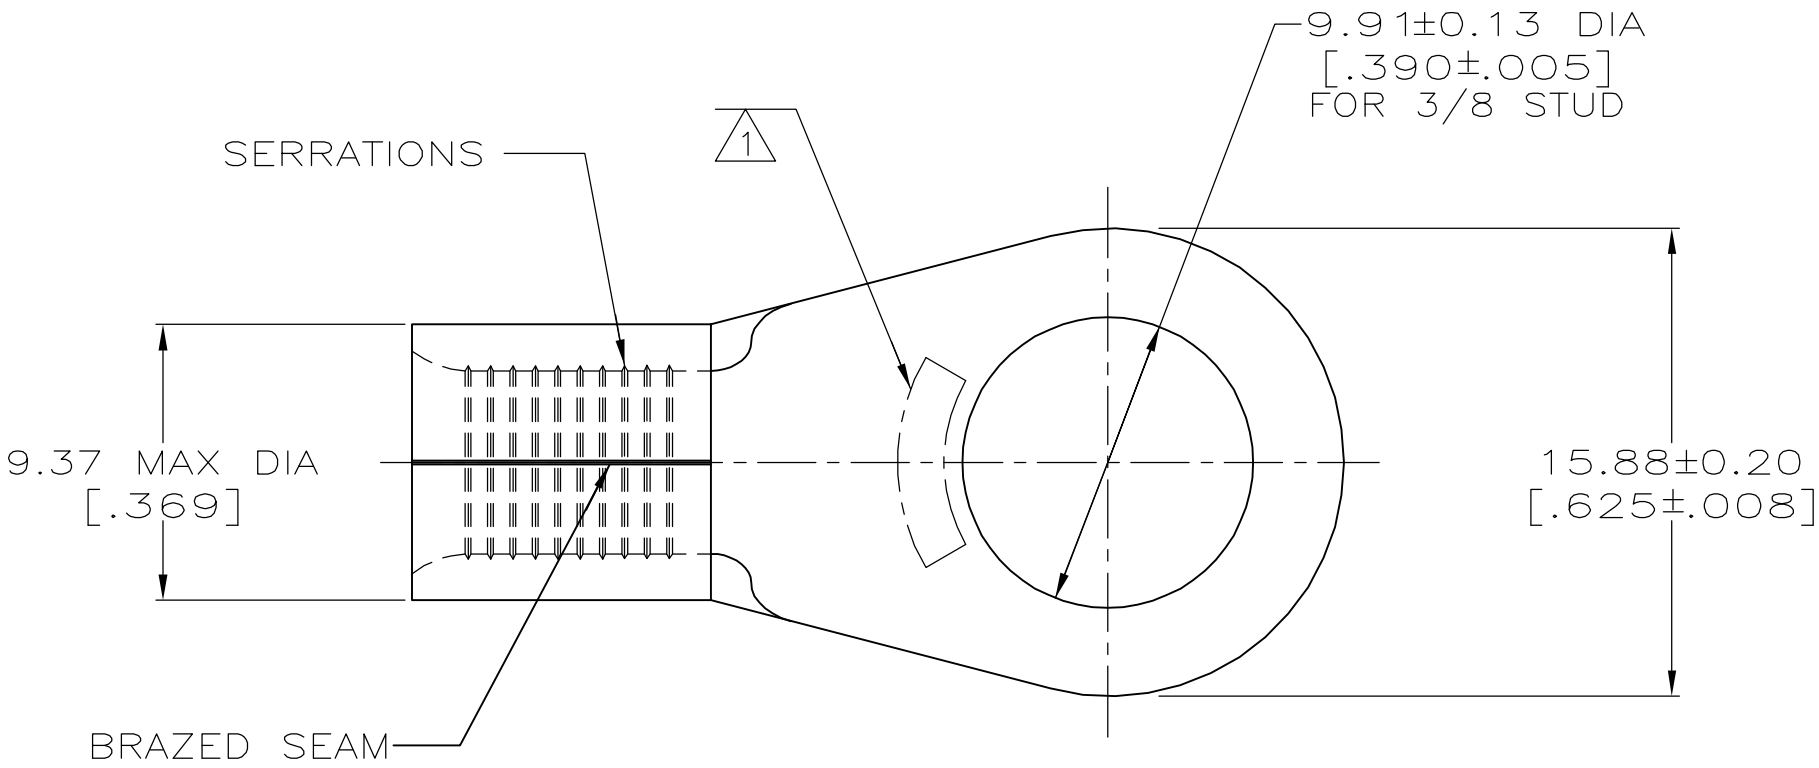

25	LOOSE PIECE, BAG	8-33467-5
25	LOOSE PIECE, BOX	8-33467-3
500	LOOSE PIECE, BOX	2-33467-4
750	TAPE MOUNTED	2-33467-3
-	LOOSE PIECE	33467

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING
TEMPERATURE:
170° C MAX

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON :
2 PLC DEC ± -
3 PLC DEC ± -
ANGLES ± -

DR 3-24-93
TA BRINKMAN
CHK 3-24-93
DA PATTERSON

AMP AMP Incorporated
Harrisburg, PA 17105-3608

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

VOLTAGE RATING:
NOT APPLICABLE

MATERIAL
COPPER PER
ASTM B-152
ANNEALED

APPD 3-24-93
DE MILLER
APPD 3-24-93
JL MECKLEY

NAME
TERMINAL, RING TONGUE,
SOLISTRAND™

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

WIRE CROSS SECTIONAL AREA RANGE:
10.5-16.8mm²[20,800-33,100] CIR MILS
SOLID OR STRANDED

FINISH
TIN PLATE
0.00254[.000100] MIN
THK PER MIL-T-10727

PRODUCT SPEC
-

SIZE
 00779 = 33467