


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0334680001](#)
Status: **Active**
Overview: MX64™ Sealed Connectors
Description: 2.54mm Pitch MX64™ Terminal, Tin (Sn) Plating, 22 AWG, Right Reel Payoff, Also used with MX123™ Female Receptacle Housing

Documents:

Drawing (PDF)	Packaging Specification PK-30907-759 (PDF)
Product Specification PS-33468-001-001 (PDF)	Packaging Specification PK-31300-516 (PDF)
Application Specification AS-33468-001-001 (PDF)	Packaging Specification PK-31302-480 (PDF)
Packaging Specification 313025040-000 (PDF)	RoHS Certificate of Compliance (PDF)

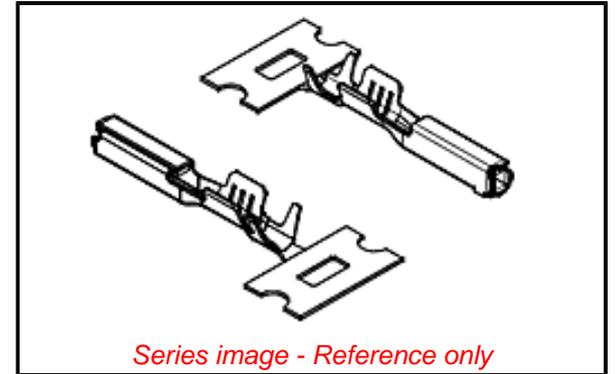

General

Product Family	Crimp Terminals
Series	<u>33468</u>
Application	Power
Comments	Right Reel Payoff For automatic and semi-automatic crimping, use Left Reel Payoff terminals. See Sales Drawing for Left Reel Payoff Part Numbers.
Crimp Quality Equipment Overview	Yes
Product Name	<u>MX64™ Sealed Connectors</u>
UPC	MX123, MX64™ 822348038015

Physical

Gender	Female
Material - Metal	Copper
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.220/g
Packaging Type	Reel
Plating min - Mating	2.540µm
Plating min - Termination	1.905µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.50-2.06mm
Wire Size AWG	22
Wire Size mm²	N/A

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-33468-001-001
Packaging Specification	313025040-000, PK-30907-759, PK-31300-516, PK-31302-480
Product Specification	PS-33468-001-001
Sales Drawing	SD-33468-001

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -ED/01/2017 (12 January 2017)

Halogen-Free Status

Not Relevant

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Relevant
ELV	Compliant
RoHS Phthalates	Not Contained

Search Parts in this Series

33468 Series

Use With

MX64™ Sealed Single Row Crimp Housing 31403 , MX123™ Female Receptacle Housing 34566 , 34576