

VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR
HEREWITH IS NOT TO BE REPRODUCED, USED OR
DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT
THE PERMISSION OF VICOR CORP.

REVISIONS

REV

DESCRIPTION

DATE _____

APPROVED

1

RELEASED PER E080810

SA

04/17/08

EF

2

REVISÉD PER E100698A

KUK

5/19/10

JG


3

REVISFD PER F100764

DCS

06/07/10

KUK

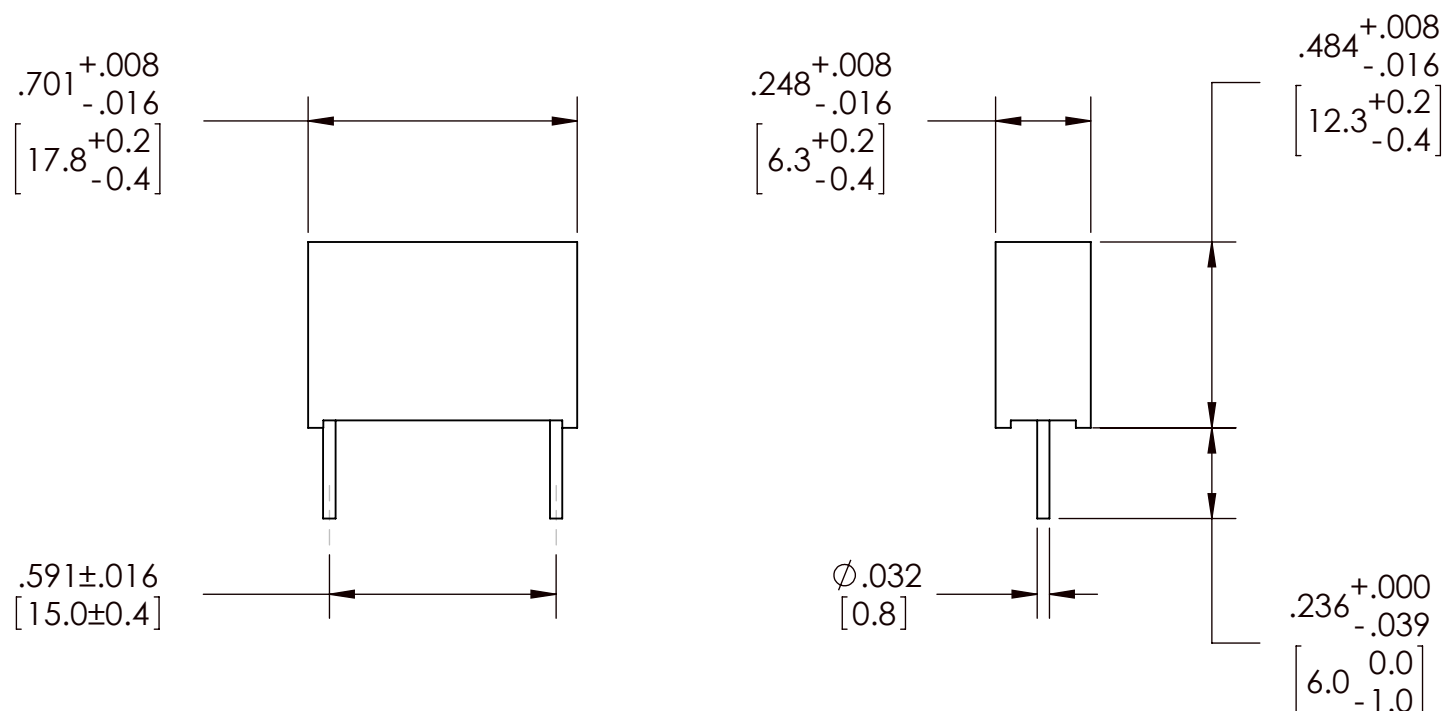


NOTES:

1. DIELECTRIC MATERIAL: POLYESTER-FILM (MKT)
2. COATING: PLASTIC CASE, EPOXY RESIN SEALED, FLAME RETARDANT.
3. TEMPERATURE RATING: -40 TO +100°C
4. APPROVALS INCLUDE VDE,SEV,DEMKO,SEMKO,NEMKO, SETI, UL,IMQ,OVE AND CSA.
5. RoHS COMPLIANT, LEAD FREE PER CST-0001 LATEST REVISION

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE:	250 VAC, 50/60 Hz
PERMISSIBLE DC VOLTAGE:	1000 Vdc
DISSIPATION FACTOR:	< 1% MEASURED AT 1 KHZ
MAXIMUM PULSE RISE TIME:	du/dt 200V / uSEC
TEST VOLTAGE:	BETWEEN TERMINATIONS 5000 Vdc / 1 SEC.
INSULATION RESISTANCE:	15000 MEGOHM MINIMUM VALUE

	DRAWN	DATE				SWD
	YWT	03/18/07				
MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCH [MM] TOLERANCES ARE: DECIMALS ANGLES X.XX [X.X] = ±0.01 [0.25] ±1° X.XXX [X.XX] = ±0.005 [0.127]		CAPY RFI 0.01uF + 20% 250V RADIAL			
FINISH	THIRD ANGLE PROJECTION  DO NOT SCALE DRAWING		SIZE	CAGE CODE	DWG NO	REV
			B	67131	33643	3
			SCALE 2 : 1		SHEET 1 OF 1	

