


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		S	REVISED PER 0G3B-1051-04	12NOV04	KW	SR

D




C

B


A

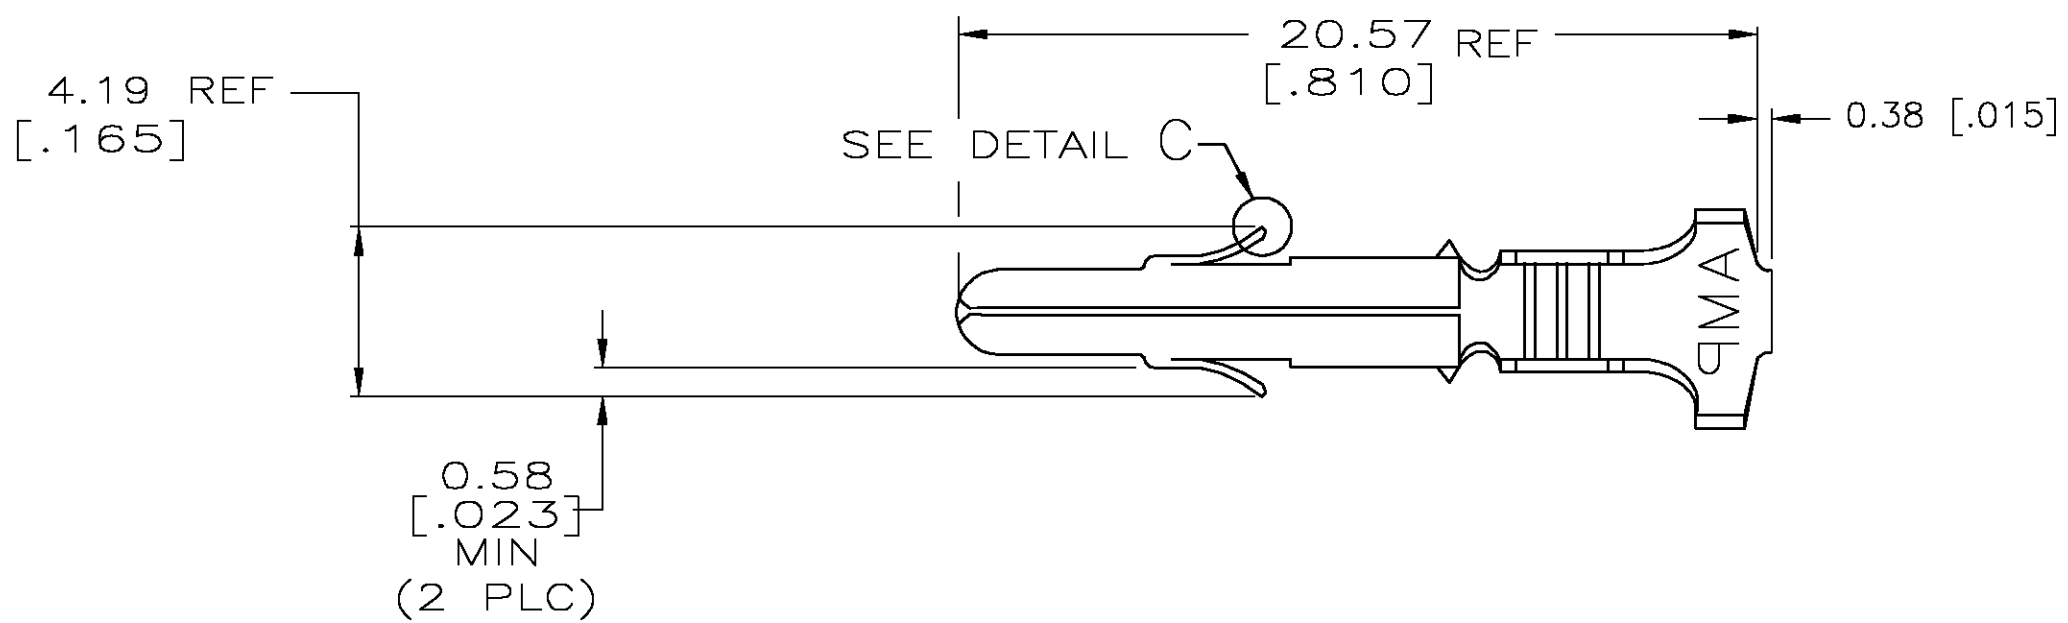

- 1 PLATED WITH 0.00076[.000030] GOLD OVER 0.00127[.000050] MIN THK NICKEL UNDERPLATE.
- 2 GOLD OVER NICKEL ON ENTIRE STAMPING; 0.00076[.000030] GOLD MINIMUM AT OINT OF MEASUREMENT IN CONTACT AREA, GOLD FLASH MINIMUM IN WIRE BARREL.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.
4. WIRE RANGE: 20-14 AWG
INSULATION RANGE : Ø5.08 [.200] MAX

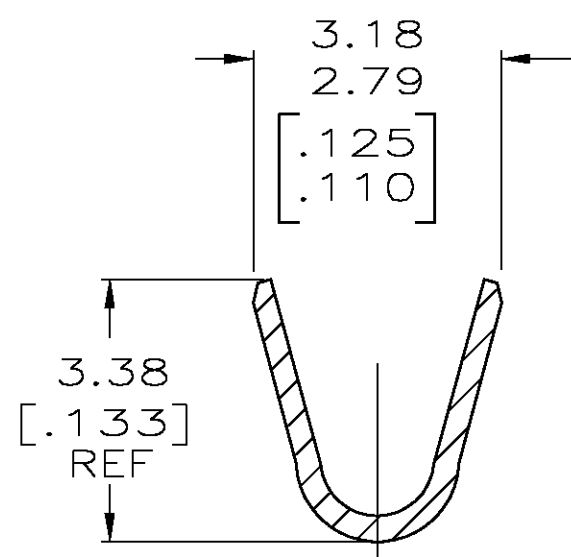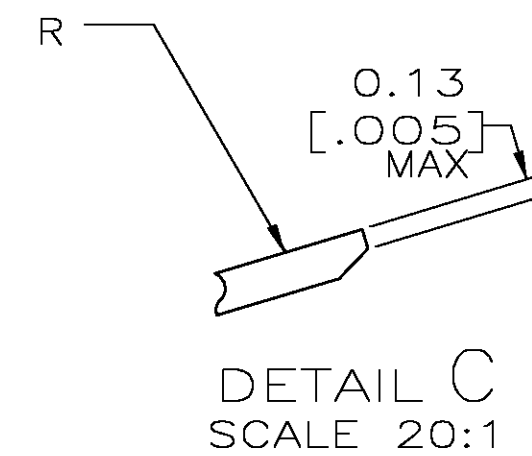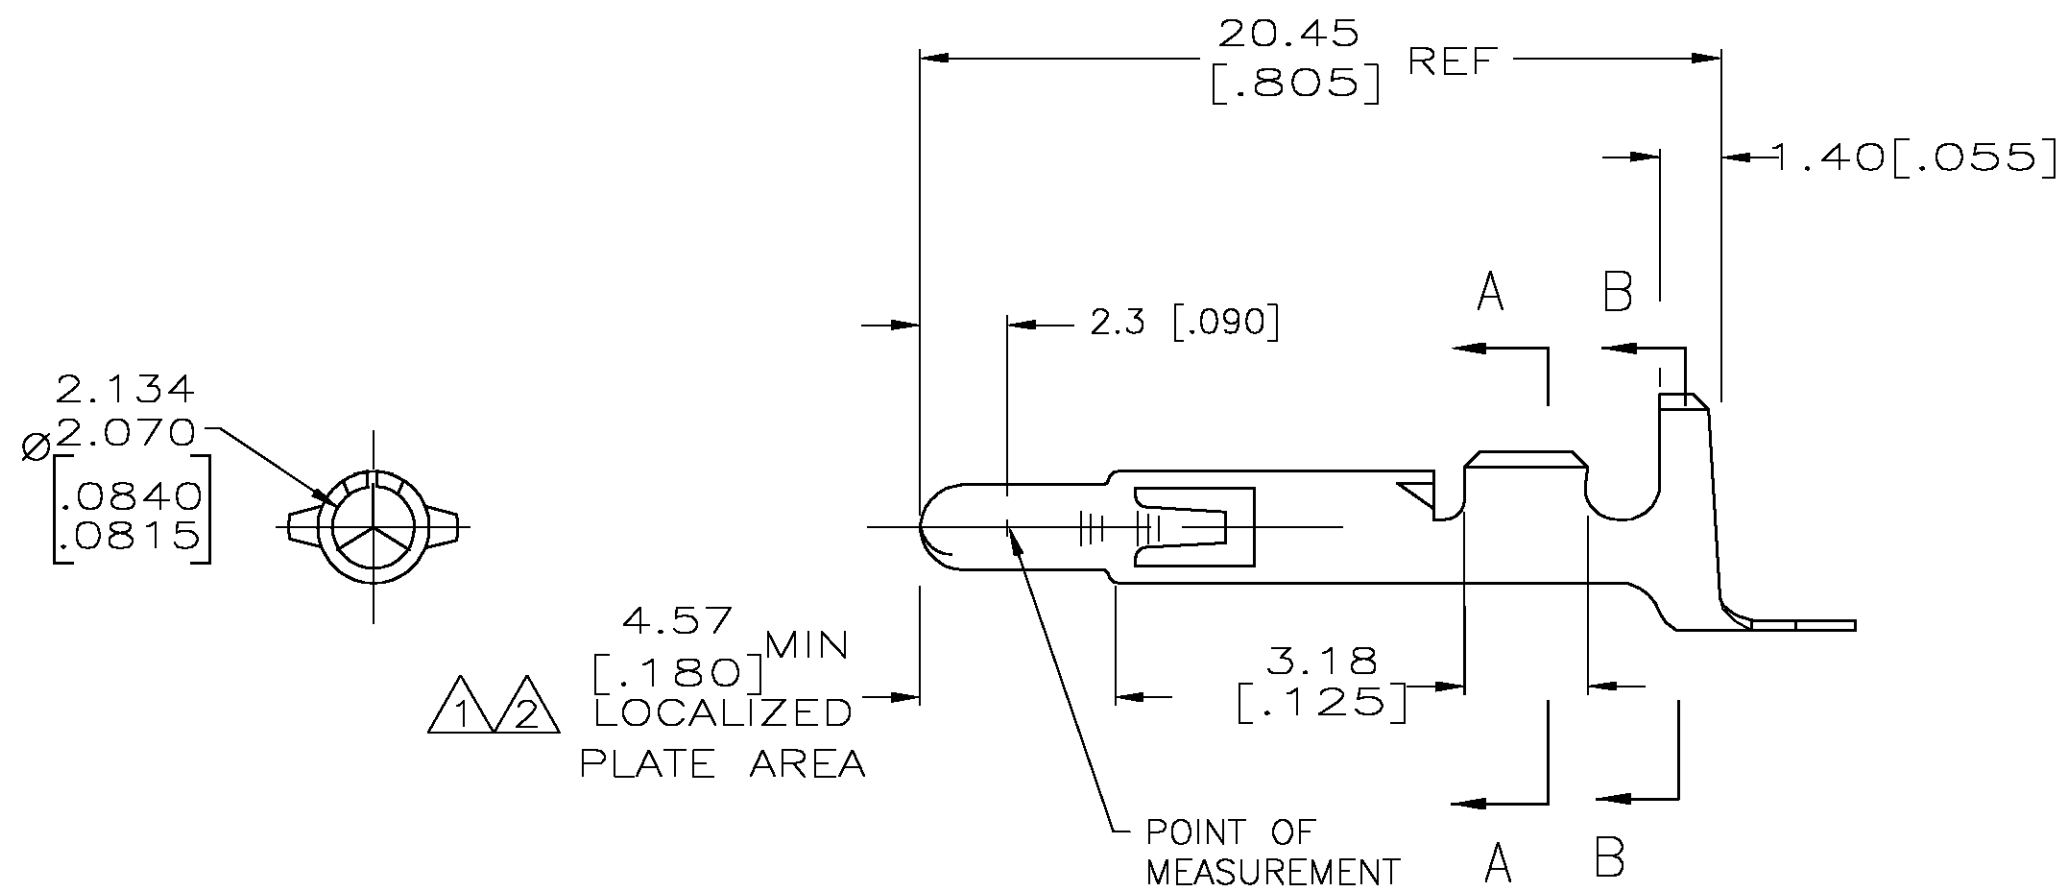

SECTION A-A
SCALE 10:1

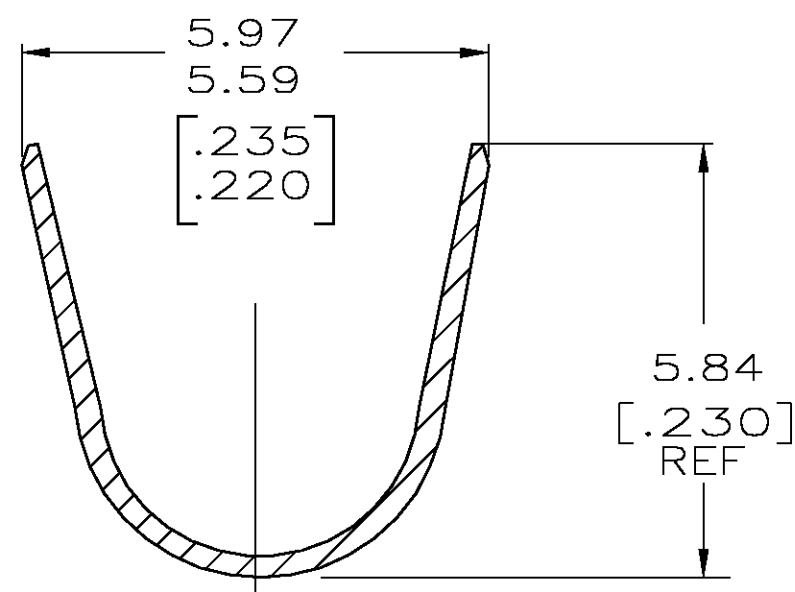

SECTION B-B
SCALE 10:1

METRIC

GOLD	2	0.30 [.012] BRASS	350552-7
GOLD	2	0.30 [.012] PH BZ	350552-6
TIN		0.30 [.012] PH BZ	350552-3
GOLD	1	0.30 [.012] BRASS	350552-2
TIN		0.30 [.012] BRASS	350552-1
FINISH		MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12NOV2004	tyco Electronics Tyco Electronics Corporation Greensboro, NC 27409	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK S. RIDGILL 12NOV2004		
	0 PLC ± -	APVD S. RIDGILL 12NOV2004	NAME PIN, (LOOSE PIECE), UNIVERSAL MATE-N-LOK™	
	1 PLC ± -	PRODUCT SPEC		
	2 PLC ± 0.13 [.005]	APPLICATION SPEC	SIZE A2	
	3 PLC ± -			
	4 PLC ± -		CAGE CODE 00779	
	ANGLES ± 0°30'			
MATERIAL -	FINISH -	WEIGHT -	DRAWING NO C=350552	
		CUSTOMER DRAWING		
		SCALE 5:1	SHEET 1 OF 1	REV S