

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [35068-9722](#)
Status: **Active**
Description: MP-Lock™ Quick Disconnect, Female, for 20-22 AWG (0.52-0.33mm²), Metal Strip, Tab 4.75 x 0.80mm, Pre-Tin Plated

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Packaging Specification PK-35068-001 \(PDF\)](#)

Agency Certification

UL E92853

General

Product Family Quick Disconnects
 Series [35068](#)
 Crimp Quality Equipment Yes
 Product Name MP-Lock™
 Type Quick Disconnect
 UPC 800753968448

Physical

Barrel Type Open
 Gender Female
 Glow-Wire Compliant No
 Insulation None
 Lock to Mating Part Yes
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Net Weight 0.373g
 Orientation Straight
 Packaging Type Reel
 Plating min - Mating 0.813µm
 Plating min - Termination 0.813µm
 Polarized to Mating Part Yes
 Tab Thickness 0.81mm
 Tab Width 4.75mm
 Temperature Range - Operating -40°C to +105°C
 Termination Interface: Style Crimp or Compression
 Wire Insulation Diameter 2.70mm max.
 Wire Size AWG 20, 22
 Wire Size mm² 0.33 - 0.52


Electrical

Voltage - Maximum 300V

Material Info

Reference - Drawing Numbers

Packaging Specification PK-35068-001
 Sales Drawing SD-35068-9722

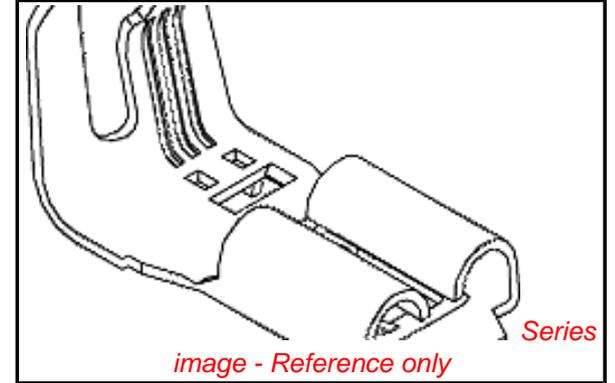

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[35068Series](#)

Use With

[35189](#) , [35817](#) , [35961](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Mini-Mac™	0638019000
Applicator Rear Feed	