


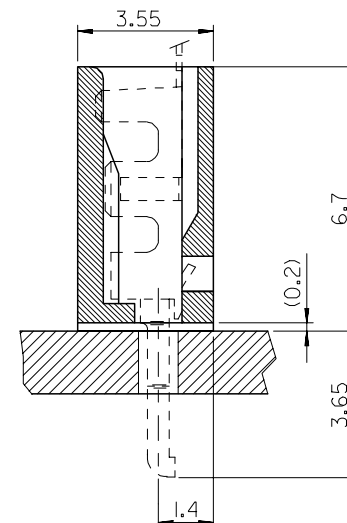

1.MATERIAL : NYLON66 UL94V-0
2.MATED WITH TERMINAL : 35047-9802

LEGEND

```

35164-  ** 0 *
        |  |
        |  +--- COLOR : 0 --- NATURAL
        |  |         2 --- RED
        |  |
        +--- CKT ( 02 , 03 , 04 ....)

```

38.2	35	35164	-150*	15
35.7	32.5		-140*	14
34.0	30	↗	-130*	13
30.7	27.5		-120*	12
28.2	25		-110*	11
25.7	22.5		-100*	10
23.2	20		-090*	9
20.7	17.5		-080*	8
18.2	15		-070*	7
15.7	12.5		-060*	6
13.2	10		-050*	5
10.7	7.5	↘	-040*	4
8.2	5.0		-030*	3
5.7	2.5	35164	-020*	2
B	A	ENG.NO		CKT

REVISED EC NO: KOP2008-0071 DRAWN: JEONG 2007/10/30 CHKD: YSOKIM 2007/10/31 APPR: YUNSIKKIM 2007/10/31	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 8:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		▼=0 ▽=0	mm	INCH	DRAWN BY KSKIM	DATE 2001/10/25	TITLE 2.5 PITCH BOARD-IN CONN. HOUSING			
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	CHECKED BY JUNGKIL OH	DATE 2001/10/25					
		2 PLACES ± --- ± ---	1 PLACE ± 0.3 ± ---	APPROVED BY CHANGWOOLE	DATE 2001/10/25	MOLEX MOLEX INCORPORATED				
		ANGULAR ± 2 °		MATERIAL NO.	DOCUMENT NO.					SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-35164-**-0*		1 OF 1		
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								