
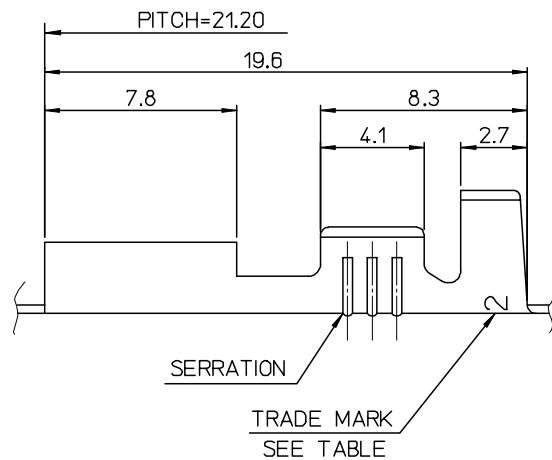
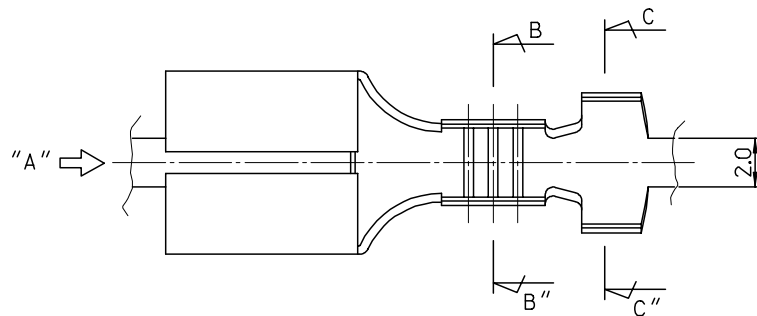



SECTION B-B'



SECTION C-C'

NOTES

1. MATERIAL : BRASS, 0.35mm THICKNESS
2. RECOMMENDED LENGTH OF WIRE STRIP IS 5.2-5.8 mm
3. FINISH, TENSION : SEE TABLE



ENG. NO.	a	b	c	d	e	WIRE RANGE	PLATED	TRADE MARK	TENSION
35725-3600	5.2	4.6	6.3	6.3	2.9	AWG #14-#12	(UNPLATED)	MK2	STANDARD TENSION
35725-3700	3.5	3.5	5.7	5.0		AWG #18-#14			
35725-3800	2.85	2.9	3.8	3.8		AWG #22-#20			
35725-3610	5.2	4.6	6.3	6.3	2.9	AWG #14-#12	(POST-TIN PLATING)	MK2	STANDARD TENSION
35725-3710	3.5	3.5	5.7	5.0		AWG #18-#14			
35725-3810	2.85	2.9	3.8	3.8		AWG #22-#20			
35725-3601	5.2	4.6	6.3	6.3	2.95	AWG #14-#12	(UNPLATED)	L MK2	LOW TENSION
35725-3701	3.5	3.5	5.7	5.0		AWG #18-#14			
35725-3801	2.85	2.9	3.8	3.8		AWG #22-#20			

REV	DESCRIPTION
A	REVISED
	EC NO: KOR2008-0030
	DRWN: JHPARK01 2007/09/10
	CHKD: WY. YANG 2007/09/10
	APPR: YUNSIKKIM 2007/09/10

QUALITY SYMBOLS
▽=0
▽C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.3	± ---
1 PLACE	± 0.3	± ---
ANGULAR ± 1 °		

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE
MM ONLY	5:1
DRAWN BY	DATE
JS. KANG	93/04/27
CHECKED BY	DATE
BK. CHOI	93/04/27
APPROVED BY	DATE
CW. LEE	93/04/27

MATERIAL NO. SEE TABLE

DESIGN UNITS	THIRD ANGLE PROJECTION
METRIC	☉
.250 SLIP-ON RECEPTACLE TERMINAL	
MOLEX INCORPORATED	
DOCUMENT NO.	SHEET NO.
SD-35725-3**0	1 OF 01

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

35725-5910