

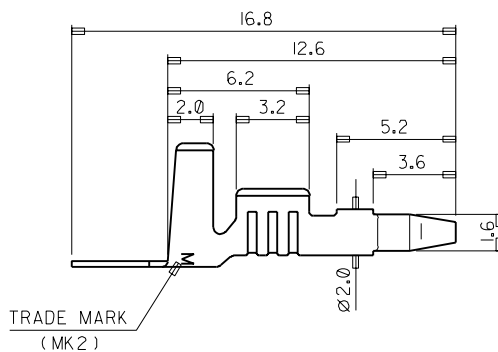


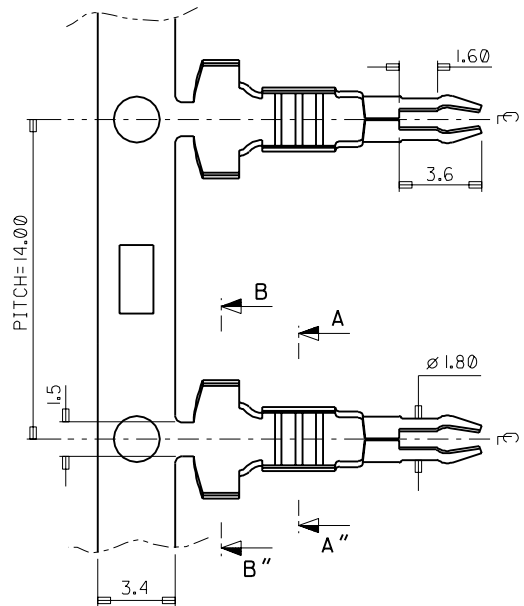



VIEW "C"




VIEW "C"

NOTES

1. MATERIAL : BRASS . 0.25mm THICKNESS
2. FINISH : PRE-PLATED TIN
3. RECOMMENDED LENGTH OF WIRE STRIP IS 4.2-4.8 mm.
4. P.C BOARD HOLE SIZE : $\phi 1.8^{+0.1}_{-0}$ mm
5. APPLICABLE P.C BOARD THICKNESS : 1.6 mm
6. GENERAL TOLERANCE : 1PLCS : ± 0.30
2PLCS : ± 0.20

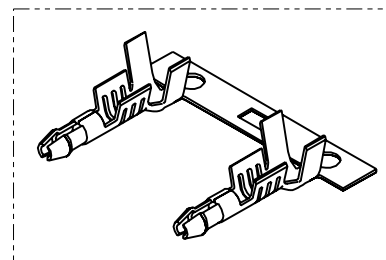

SEC' : A-A"



SEC' : B-B"

WIRE RANGE AWG #22-#18 (0.30-0.85 mm ²)					MATERIAL BRASS	molex MOLEX-KOREA CO.,LTD.		
INSULATION RANGE ø1.7 - 3.0					GENERAL TOLERANCE DIMENSION : SEE NOTES ANGLE :	DRAWN BY J.S.KANG	CHK'D BY	
	B	REVISED	96-036	96 3.19	DIMENSION CLASSIFICATION ▽ : CRITICAL ▼ : MAJOR () : REFERENCE	APP'D BY	SCALE 5/1	
DIE FEED: ---	A	NEW RELEASED		93 11.18	ASS'Y PART	TITLE: ø1.8 P.C.B CRIMP TERMINAL	SHEET 1 of	
APPLICATOR FEED: 14.0	LTR	REVISION RECORD	ECN	DATE	DESCRIPTION	ENG. NO.		
Q'TY/ REEL OR PACK 3,000 Q'TY/REEL	REVISE ONLY ON CAD SYSTEM				---	---	ENG. NO. SD 35740-1410	REV B