

1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

MATERIAL:

CONTACT PIN: PHOSPHOR BRONZE SELECTIVE 10 μ " GOLD OVER NICKEL PLATED.

GROUND PIN: COPPER WIRE, TIN PLATED

METAL BODY: ZINC DIE CASTING, NICKEL PLATED

MAIN BODY: VALOX, UL94V-0 ,COLOR: GREY

CENTER PLASTIC: POLYPROLYLENE, UL94V-0

SPRING CLIP: PHOSPHOR BRONZE, TIN PLATED

ELECTRICAL:

OPERATING VOLTAGE: 500 VOLTS RMS

CONTACT RESISTANCE: 3.0 MILLIOHMS MAX. (GOLD)

FREQUENCY RANGE: 0~1 GHZ

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VOLTS (VAC)




INSULATION RESISTANCE: 5000 MEGAOHMS MIN.

IMPEDANCE NOM.: 75 OHM



TEMPERATURE RANGE: -55°C TO +105°C

MECHANICAL:

DURABILITY: 500 CYCLES

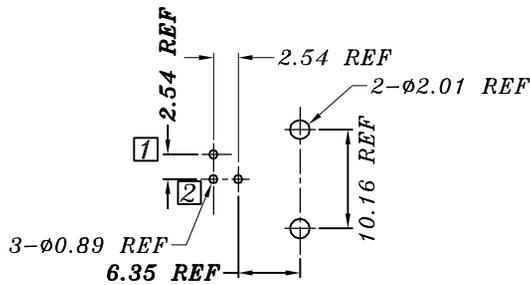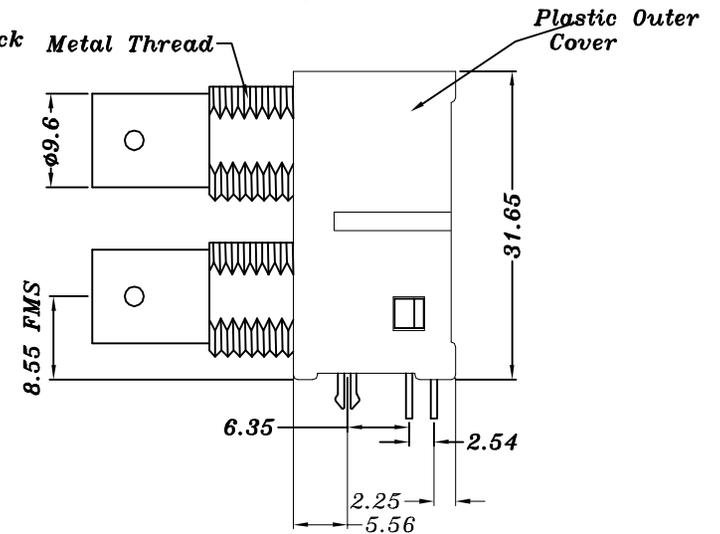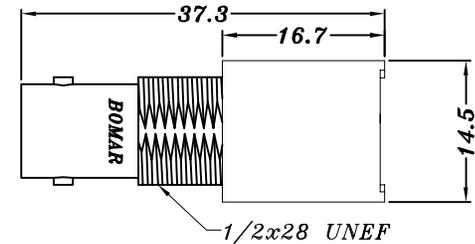

(DIMENSIONING)
PCB HOLE CONFIGURATION

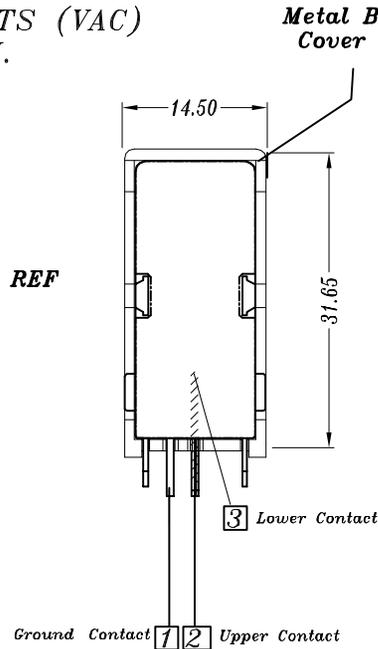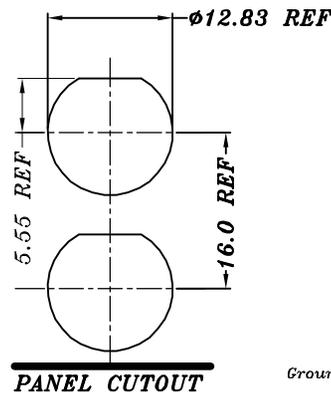

Bomar Interconnect	DESC.	Dual BNC, Panel Grnd & Back Cover R/A 75 ohm	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
	P/N	364M2795FS	CUSTOMER P/N	BB	SO	BB	DATE	11/22/04	DWG NO.	UDBN\R99B13B0	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---