


N/C	3662-204-**-90	REVISIONS			
		REV	DESCRIPTION	DATE	APPROVED
		N/C	NEW RELEASE PER E.O. C1603	4/21/94	1/94

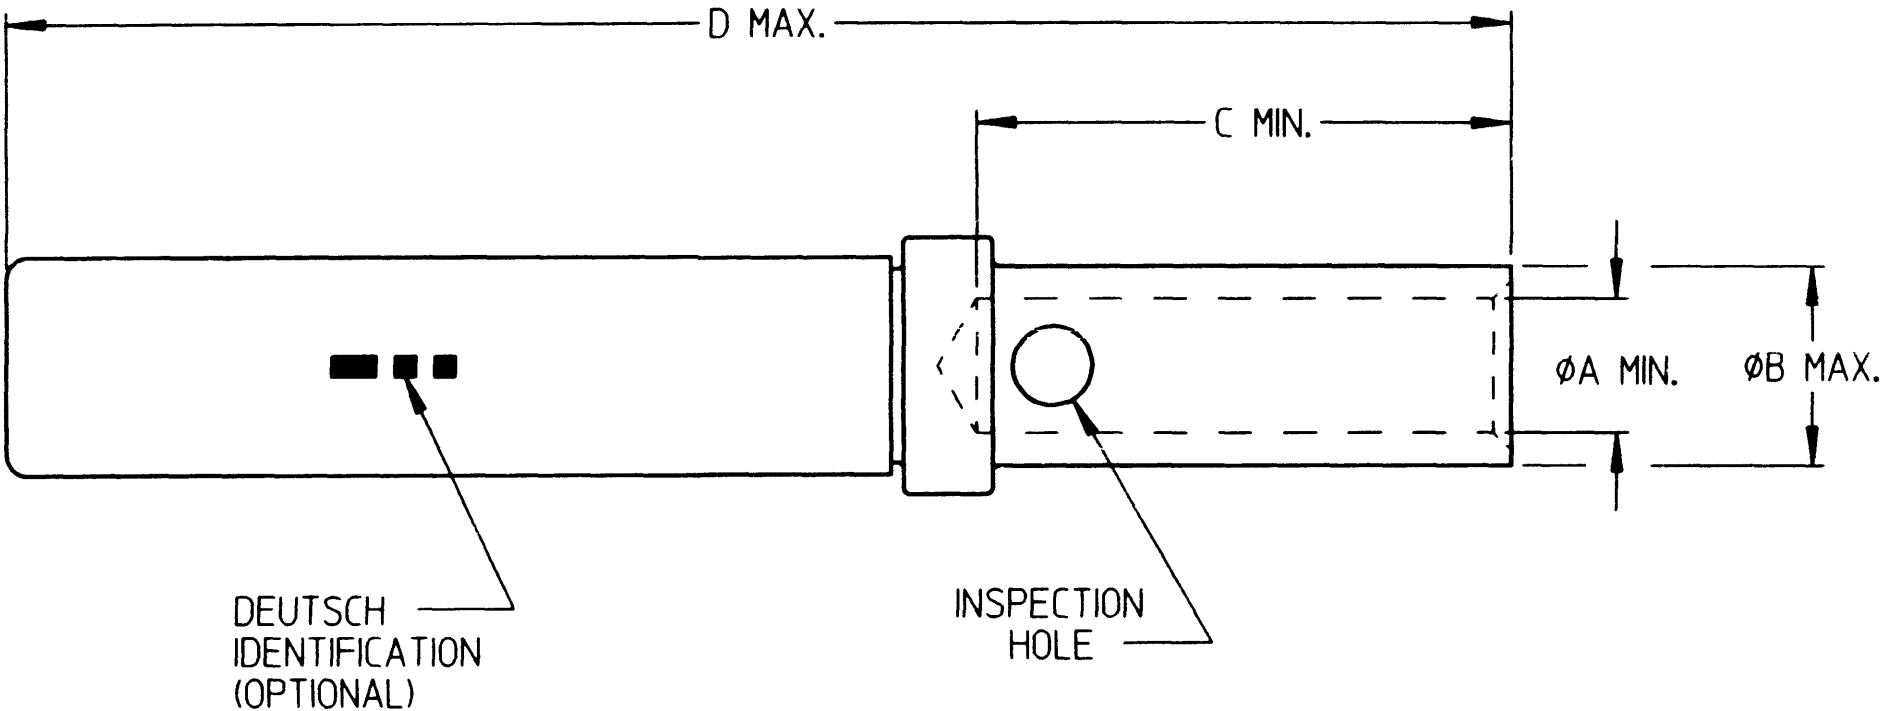

PART NUMBER **	TYPE	SIZE	ACCEPTABLE WIRE GAGE	RECOMMENDED STRIP LENGTH	ØA MIN.	ØB MAX.	C MIN.	D MAX.
3662-204-2090	SKT	20	20-24	.156 TO .219	.048	.078	.157	.656
3662-204-1690	SKT	16	16-20	.250 TO .313	.066	.103	.250	.759
3662-204-1290	SKT	12	12-14	.250 TO .313	.098	.151	.250	.759

4. CRIMP TOOL: M22520/1-01.
POSITIONER: M22520/1-02.
3. MATERIAL: BODY - COPPER ALLOY PER MIL-C-39029.
SLEEVE - STAINLESS STEEL.
2. FINISH: BODY - DEUTSCHCOAT V.
SLEEVE - PASSIVATED.
- NOTE: 1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

SIGNATURE & DATE		CONTACT, SOCKET MIL-C-39029/5 TYPE WITH DEUTSCHCOAT V LESS COLOR BANDS ENVELOPE	CP	MATL CODE
DR	R. GROSS 3-14-94		DEUTSCH ENGINEERED CONNECTING DEVICES Municipal Airport Banning, California	
CHK	<i>[Signature]</i> 4/21/94			
PE	R. Gross 3-14-94			
APPD			B	3662-204-**-90
SCALE NONE WT			DWG SIZE	CODE 11139
			SHEET 1 OF 1	

3662-204-XX90-env_A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3662-204-2090](#)