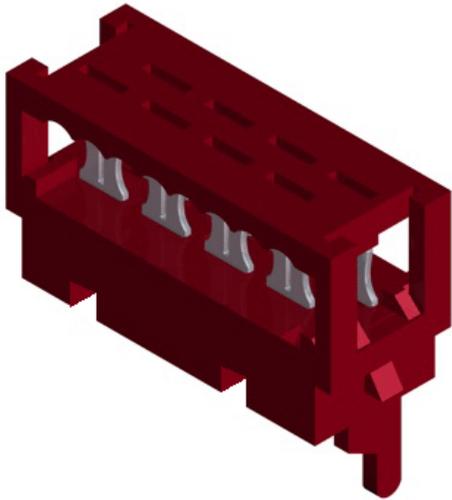


Order code: 372-1-004-T-KT0


6) WIRE TO BOARD

Series: **372**

Pitch (mm)	1,27
Mating pin size (range)	sq. 0,40x0,68
Cable termination	IDC
No of contacts	4, 6, 8, 10, 12, ... 24
Polarising	Yes
Locking	No
Material contact	Phosphor bronze
Plating contact	Sn
Material insulator	Thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	230 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Packaging	Reel, Tube

High density male connectors for IDC termination. These parts are compatible with industries standard products. Recommended cable: AWG 28 flat ribbon cable 1,27 mm pitch.

With shrouded pins.

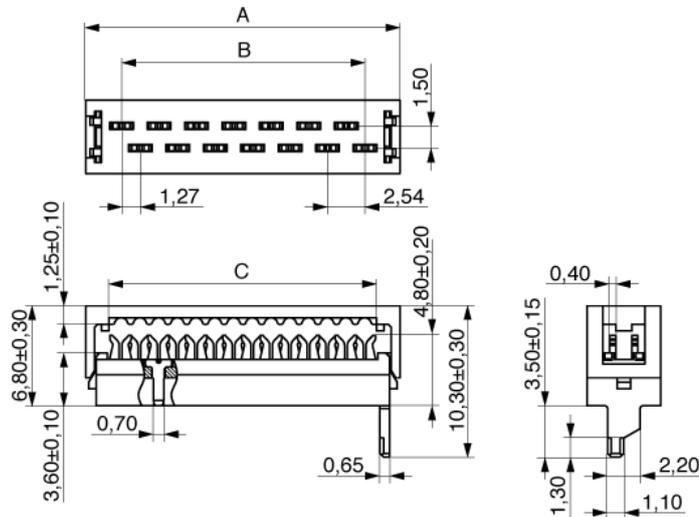**Order code: 372-1-004-T-KT0**

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 14.03.2017 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=372-1-004-T-KT0