

Expertise Applied | Answers Delivered

HF RoHS Pb DE VDE S C UL US PS E CCC K CEC



© 2016 Littelfuse, Inc.
Specifications are subject to change without notice. Application testing is strongly recommended.
Revised: 12/29/16

Electrical Characteristics

Amp Code	Rated Current	Voltage Rating	Breaking Capacity	Nominal Cold Resistance (Ohms)	Voltage Drop 1.0xI _N max. (mV)	Power Dissipation 1.5xI _N max. (mW)	Melting Integral 10xI _N min. (A²s)	Agency Approvals					
0040	40mA	250V	35A@250VAC	10.1650	900	90	0.0090				X		
0050	50mA	250V		6.4950	500	70	0.0108	X	X	X			X X
0063	63mA	250V		3.8000	400	80	0.0278	X	X	X			X X
0080	80mA	250V		2.8750	370	100	0.0384	X	X	X			X X
0100	100mA	250V		1.7030	300	110	0.0800	X	X	X			X X
0125	125mA	250V		1.3500	260	120	0.1094	X	X	X			X X
0160	160mA	250V		0.7780	200	130	0.1792	X	X	X			X X
0200	200mA	250V		0.5750	170	140	0.3120	X	X	X			X X
0250	250mA	250V		0.4000	150	150	0.4938	X	X	X			X X
0315	315mA	250V		0.2760	140	160	0.3969	X	X	X			X X
0400	400mA	250V		0.2050	130	170	1.4080	X	X	X			X X
0500	500mA	250V		0.1550	125	180	2.0000	X	X	X			X X
0630	630mA	250V		0.1150	120	200	3.0958	X	X	X			X X
0800	800mA	250V		0.1000	110	220	5.7600	X	X	X			X X
1100	1.00A	250V		0.0790	110	360	75000	X	X	X	X		X X
1125	1.25A	250V		0.0550	95	450	13.7500	X	X	X	X	X	X X
1160	1.60A	250V		0.0420	95	450	19.9680	X	X	X	X	X	X X
1200	2.00A	250V		0.0300	85	600	30.0000	X	X	X	X	X	X X
1250	2.50A	250V		0.0220	80	700	35.0000	X	X	X	X	X	X X
1315	3.15A	250V		0.0173	80	1100	77.3955	X	X	X	X	X	X X
1400	4.00A	250V	40A / 250 VAC	0.0129	75	1200	126.4000	X	X	X	X	X	X X
1500	5.00A	250V	50A / 250 VAC	0.0094	80	1300	115.0000	X	X	X	X	CQC	X
1630	6.30A*	250V		0.0070	58	1250	138.9150	X	X	X		CQC	X

1 Per UL, approved breaking capacity is 50 A at 250 V.


* Conducting path min. 0.2 mm²

Notes:


1) 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

2) Resistance is measured at 10% of rated current, 25°C.


Temperature Re-rating Curve

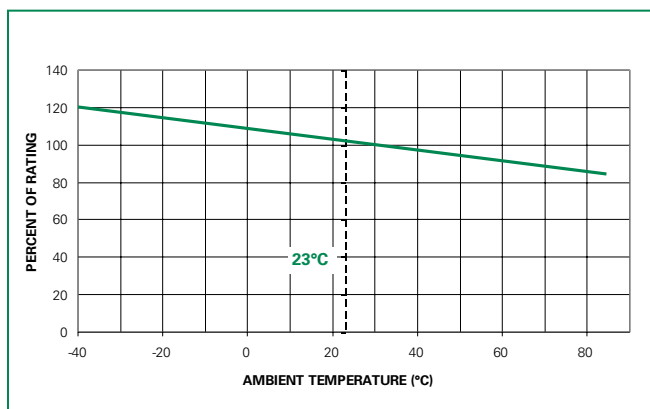

Average Time Current Curves

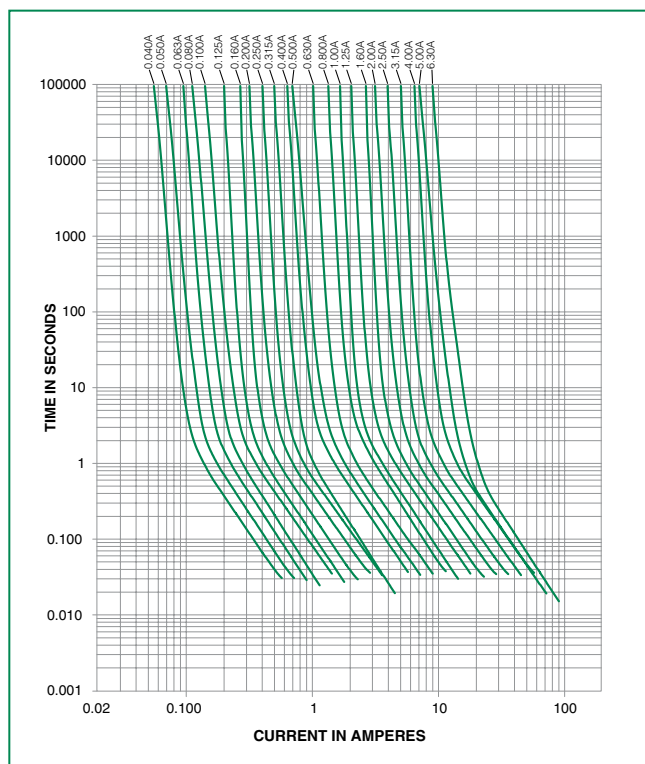

Soldering Parameters - Wave Soldering

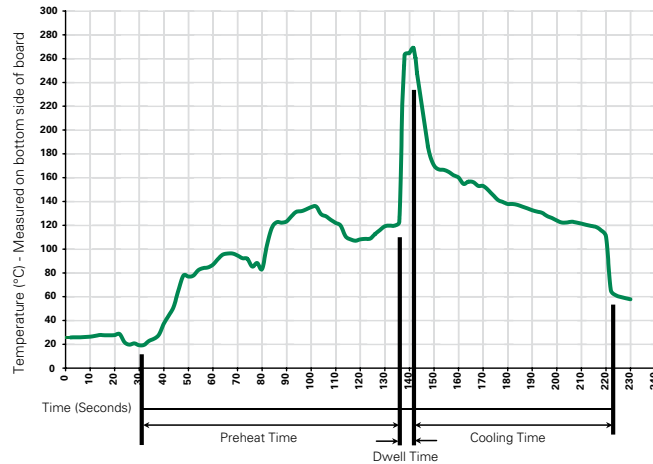

Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100°C
Temperature Maximum:	150°C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260°C Maximum
Solder Dwell Time:	2-5 seconds

Recommended Hand-Solder Parameters:


Solder Iron Temperature: 350°C +/- 5°C
Heating Time: 5 seconds max.

Note: These devices are not recommended for IR or Convection Reflow process.

Product Characteristics

Materials	Base/Cap: Brown Thermoplastic Polyamide PA 6.6, UL 94 V-0 Round Pins: Copper, Tin-plated
Lead Pull Strength	10 N (IEC 60068-2-21)
Solderability	260°C, ≤ 3s. (Wave) 350°C, ≤ 1s. (Soldering Iron)
Soldering Heat Resistance	260°C, 10s. (IEC 60068-2-20) 350°C, 3s. (Soldering Iron)
Operating Temperature	-40°C to +85°C (Consider re-rating)
Climatic Category	-40°C/+85°C/21 days (IEC 60068-1,-2-1,-2-2,-2-78)
Stock Conditions	+10°C to +60°C RH ≤ 75% yearly average, without dew, maximum value for 30 days-95%
Vibration Resistance	24 cycles at 15 min. each (IEC 60068-2-6) 10 - 60 Hz at 0.75 mm amplitude 60 - 2000 Hz at 10G's acceleration

Dimensions




Long Leads (L=18.8mm)
Short Leads (L=4.3mm)

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
372 Series				
Tape & Ammopack	N/A	1,000	0001	N/A
Short Leads	N/A	1,000	0411	N/A
Short Leads	N/A	200	0431	N/A
3.3mm Leads	N/A	1,000	0511	N/A

Part Numbering System

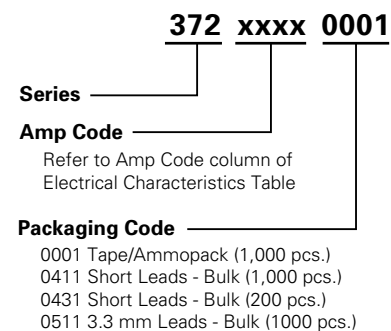

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[37202500431](#) [37212500431](#) [37202500001](#) [37200500000](#) [37212500001](#) [37201250430](#) [37212500411](#)
[37200500410](#) [37202500411](#) [37208000431](#) [37202000411](#) [37204000411](#) [37205000410](#) [37201000410](#) [37215000411](#)
[37214000411](#) [37212000411](#) [37211000410](#) [37203150431](#) [37213150431](#) [37200500431](#) [37211250000](#)
[37201250000](#) [37201250411](#) [37211250410](#) [37204000431](#) [37214000431](#) [37211600000](#) [37201600001](#) [37201600411](#)
[37211600410](#) [37200800430](#) [37212000431](#) [37202000431](#) [37208000410](#) [37211250431](#) [3720063041](#) [3721250041](#)
[3720200041](#) [37200400001](#) [37200400411](#) [37200400431](#) [37200500001](#) [37200500411](#) [37200630001](#) [37200630411](#)
[37200630431](#) [37200800001](#) [37200800431](#) [37201000001](#) [37201000411](#) [37201000431](#) [37201250001](#) [37205000001](#)
[37205000411](#) [37205000431](#) [37206300001](#) [37206300411](#) [37206300431](#) [37208000001](#) [37208000411](#)
[37211000001](#) [37211000411](#) [37211250001](#) [37211250411](#) [37211600001](#) [37211600411](#) [37211600431](#) [37214000511](#)
[37215000431](#) [37205000430](#) [37200630410](#) [37200630000](#) [37201000430](#) [37211000431](#) [37200400430](#)
[37206300000](#) [37216300001](#) [37201600431](#) [37211600430](#) [37206300410](#) [37200800000](#) [37203150411](#) [37206300430](#)
[37213150411](#) [37200800411](#) [37203150001](#) [37213150001](#) [37200400410](#) [37200400000](#) [37208000000](#)
[37211000000](#) [37215000001](#) [37212000001](#) [37214000001](#) [37205000000](#) [37201000000](#) [37204000001](#) [37202000001](#)
[3721630041](#)