


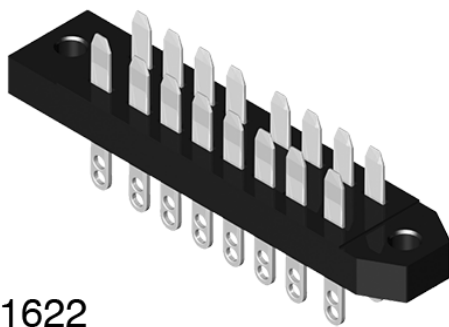

DIN 41622





Plug connectors according to DIN 41622 with solder contacts for wire or PCB termination.

Tripple row version.

No of contacts
Leading contacts
Contact type DIN 41622/41618


30

b1+b0
S - Standard male DIN 41622

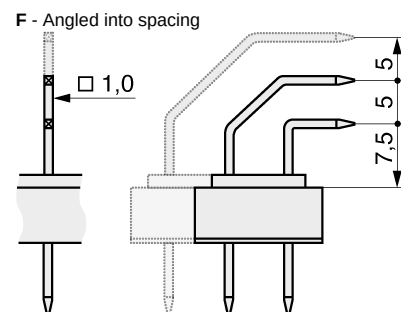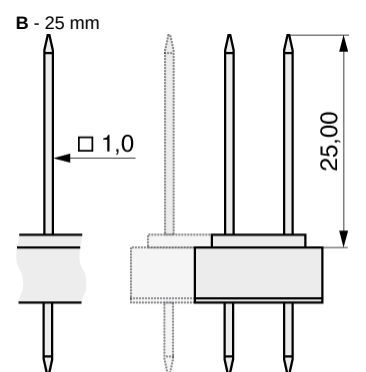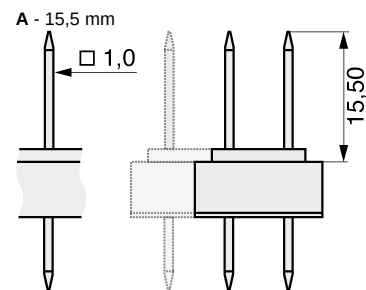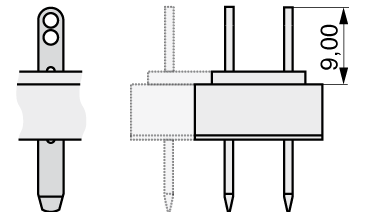


Material contact
Plating contact
Material insulator
Rated current
Withstand voltage
Operating temperature
Max. processing temper.
Packaging


Copper alloy
Ag 4 μ , Au 0,8 μ
Thermoplast UL94V-0
10,0 A
875 V_{RMS} for 1 minute
-20°C to +85°C
230°C for 5 seconds
Standard

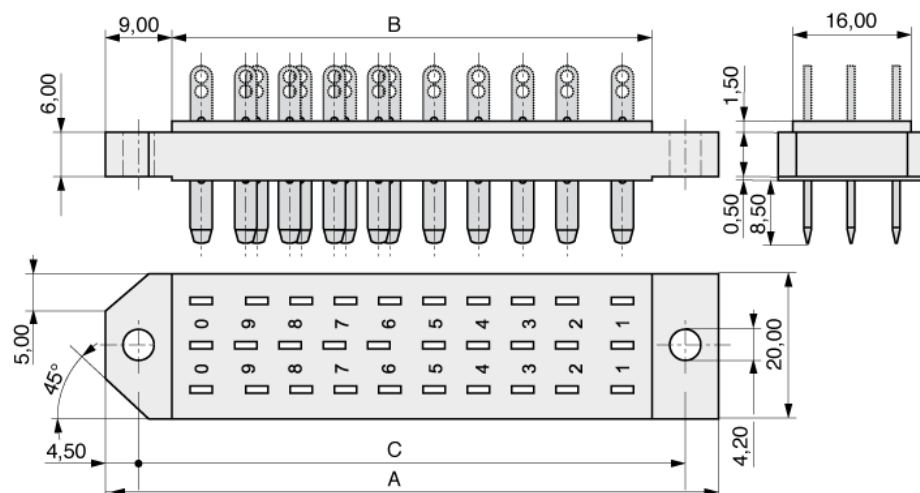


Mounting hole:

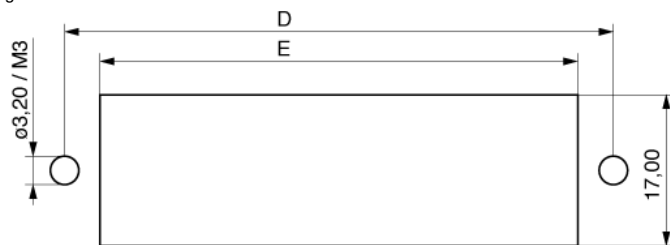

Footprint (contacts S,A,B):

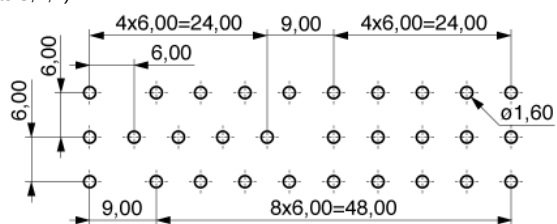

Footprint (contacts F):

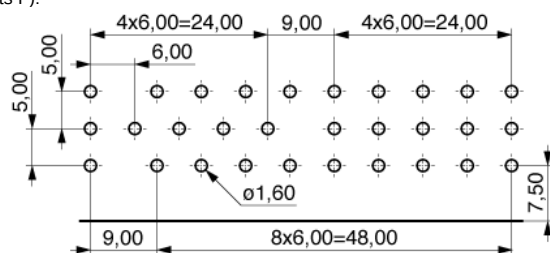

Order code: 383-2-030-SBG-ZS



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 10.03.2017 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=383-2-030-SBG-ZS