
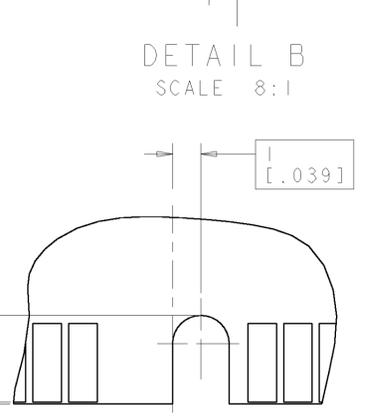
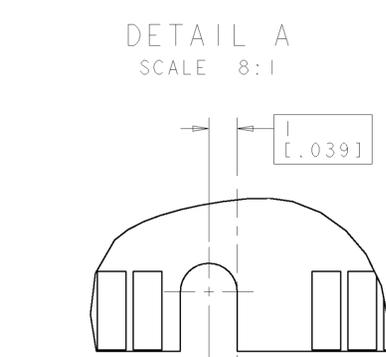
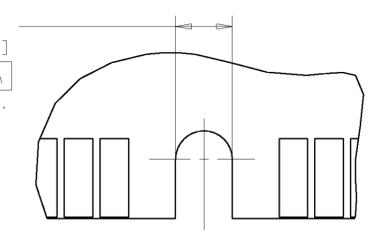
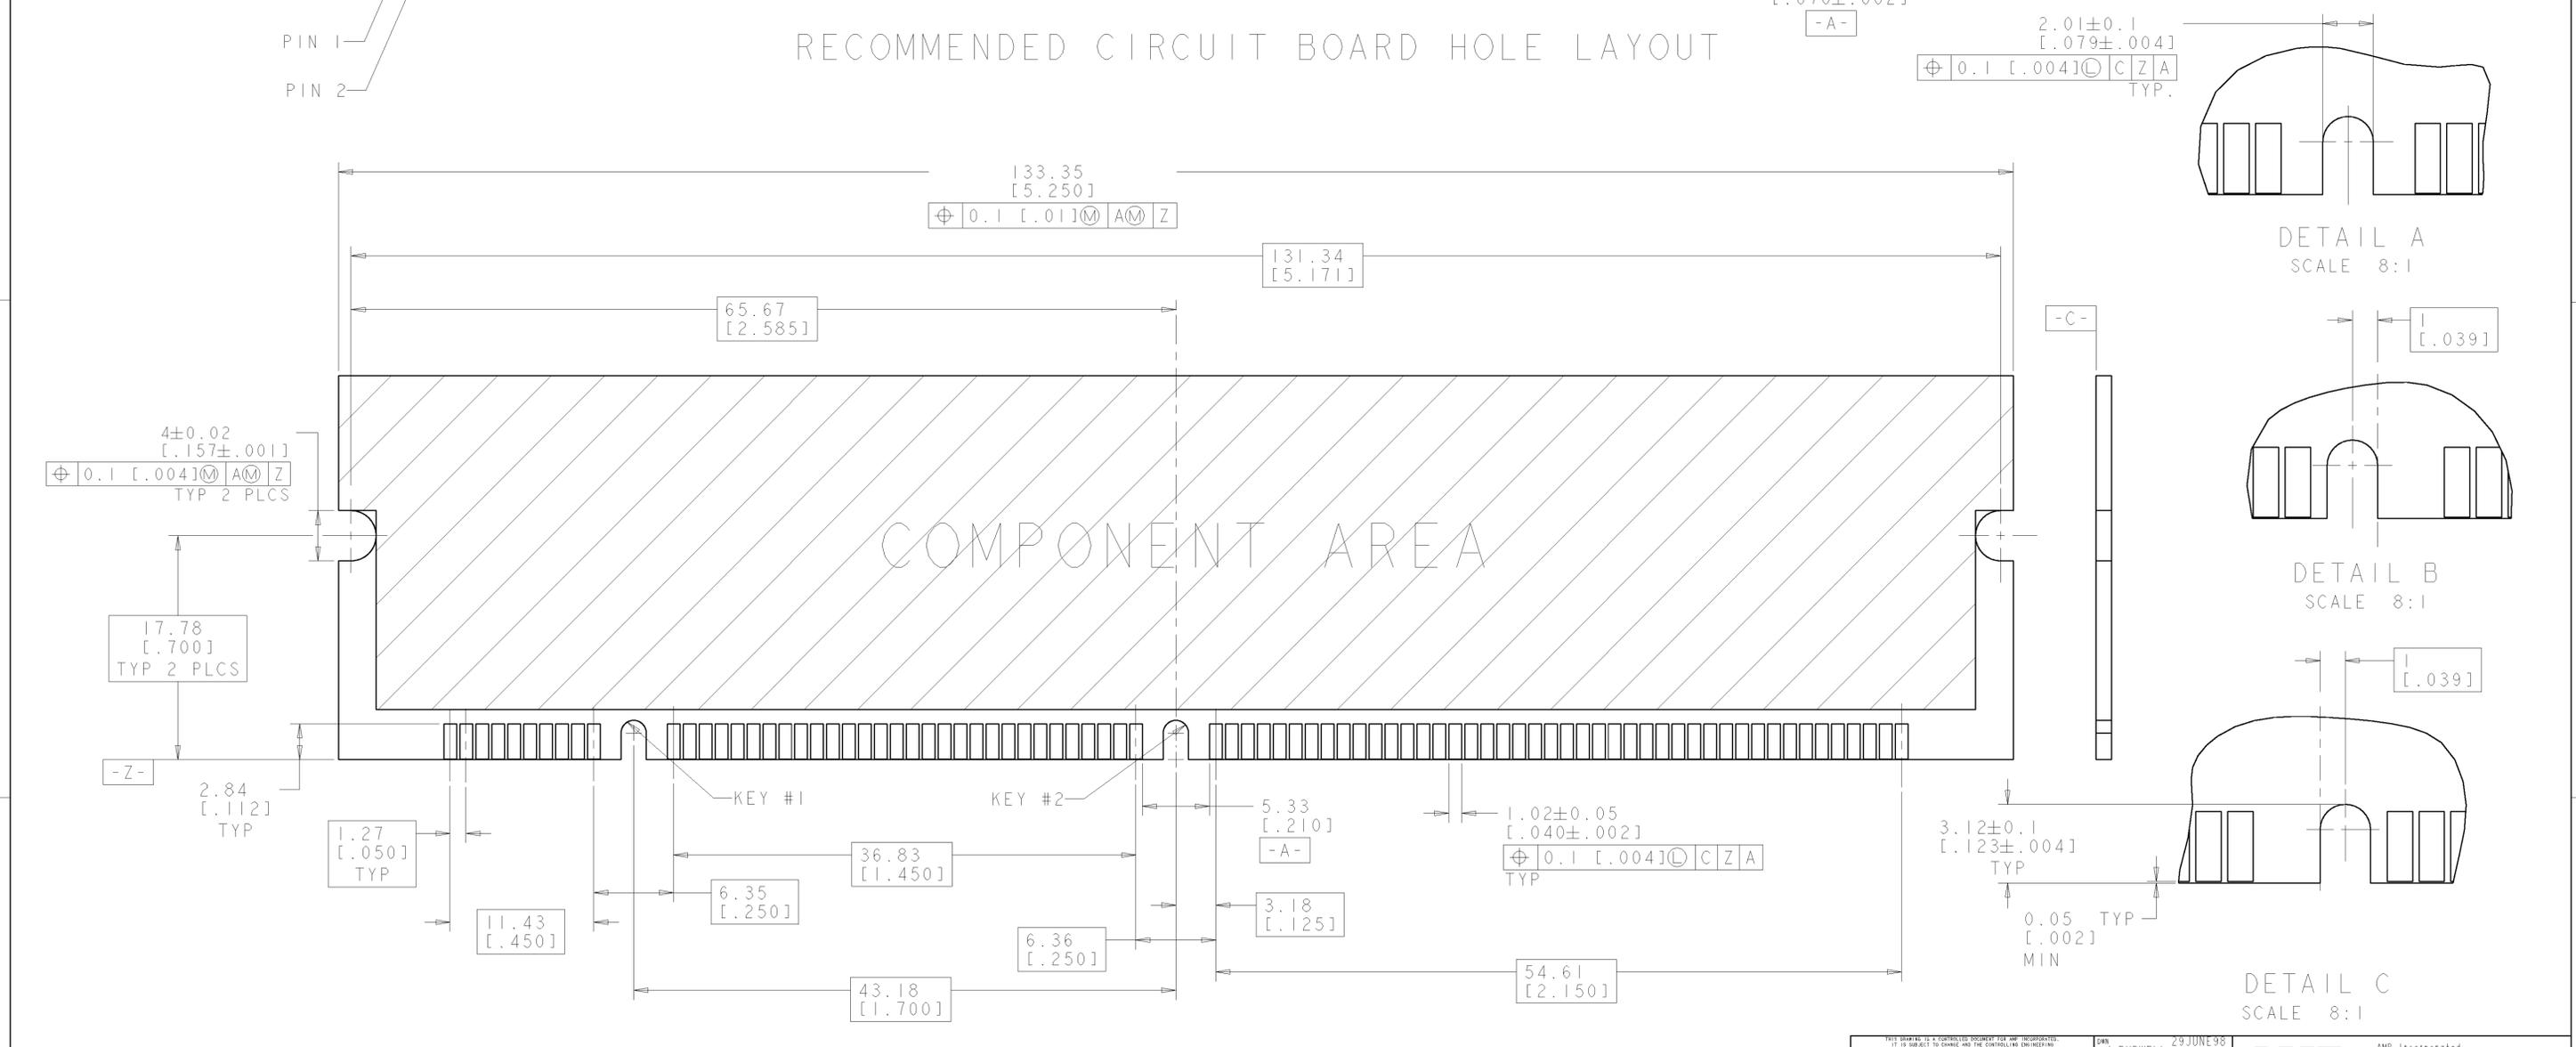




LOC	DIST	REVISIONS					
GP	0	F	LTB	DESCRIPTION	DATE	DWN	APPD
		-	-	SEE SHEET 1	-	-	-

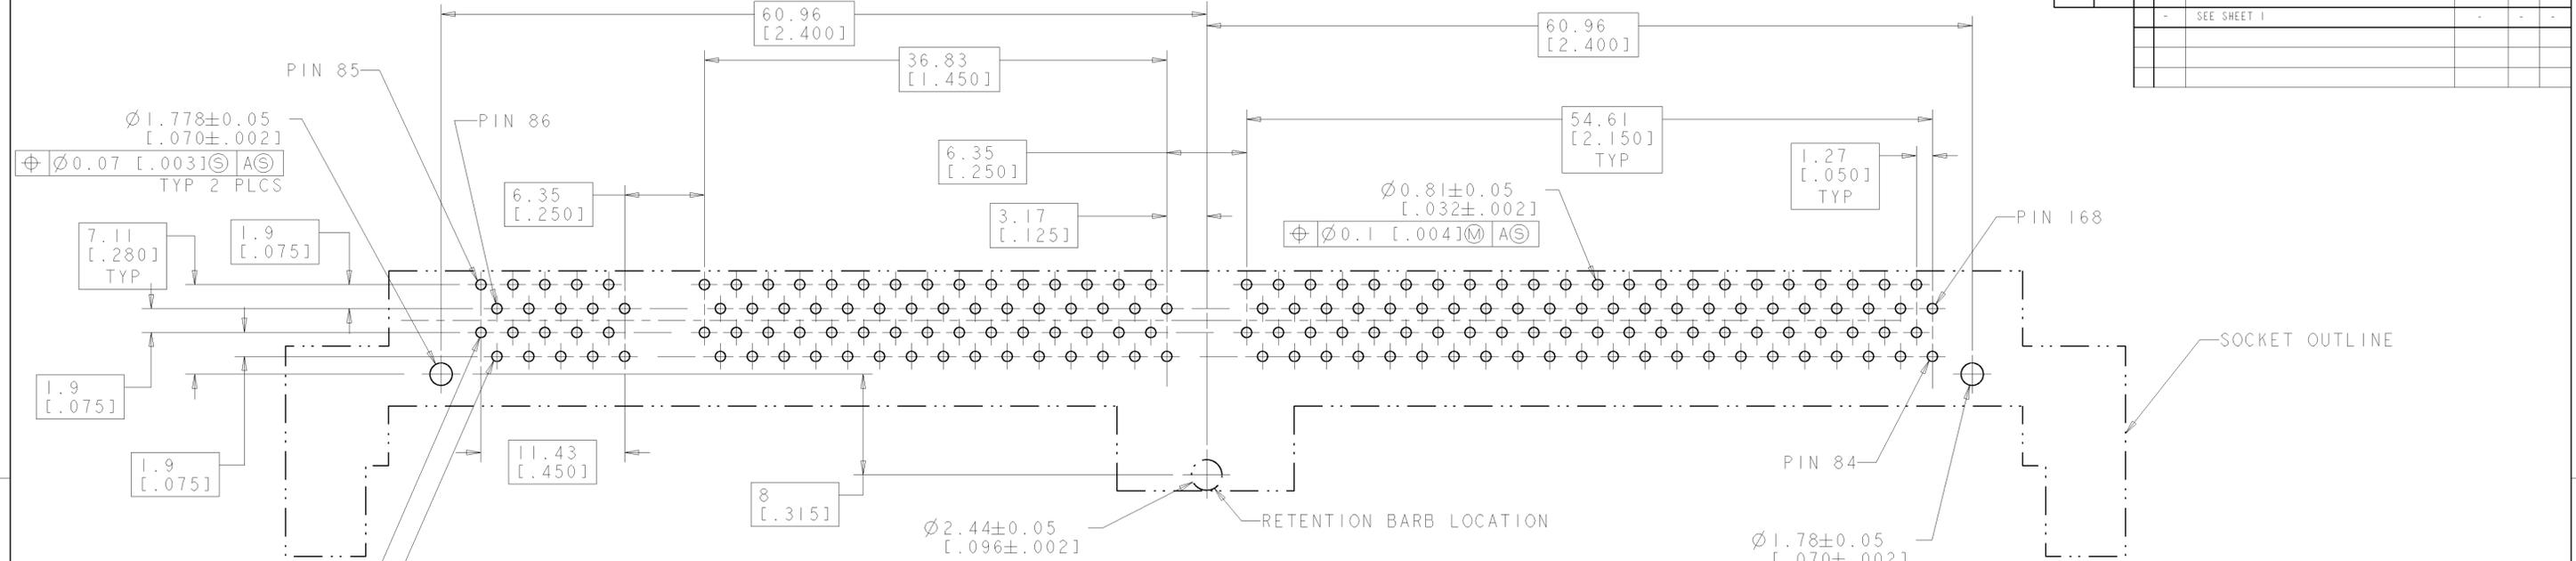


RECOMMENDED MODULE LAYOUT  
SEE JEDEC SPEC. MO-161 FOR COMPLETE MODULE DETAILS  
1.27±0.10 [.050±.004] THICK ACROSS CONTACT PADS

<small>THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED. DIMENSIONS IN PARENTHESES ARE IN INCHES UNLESS OTHERWISE SPECIFIED.</small>		DWN: J. BURWELL 29 JUNE 98 CHK: D. HAMMER 29 JUNE 98 APPD:	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLG ± 1 PLG ± 2 PLG ± 3 PLG ±0.13 [.005] 4 PLG ± ANGLE ±1°	PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: - CUSTOMER DRAWING:	NAME: SOCKET, DIMM., DRO, RT ANGLE, 168 POSITION, 17.78mm LOCKING EXTRACTORS. SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=390171 SCALE: 1:1 SHEET 2 OF 2 REV K


LOC	DIST	REV	DATE	BY	APPD
GP	0				
REVISIONS					
F	LTB	DESCRIPTION	DATE	BY	APPD
G		REVISED PER OS11-0008-02	18MAR02	JB	DS
H		REVISED PER OS11-0013-02	18MAR02	JB	DS
J		REVISED PER OS11-0057-03	14MAR04	MY	SB
K		REVISED PER OS12-0550-04	9SEP05	MY	VR

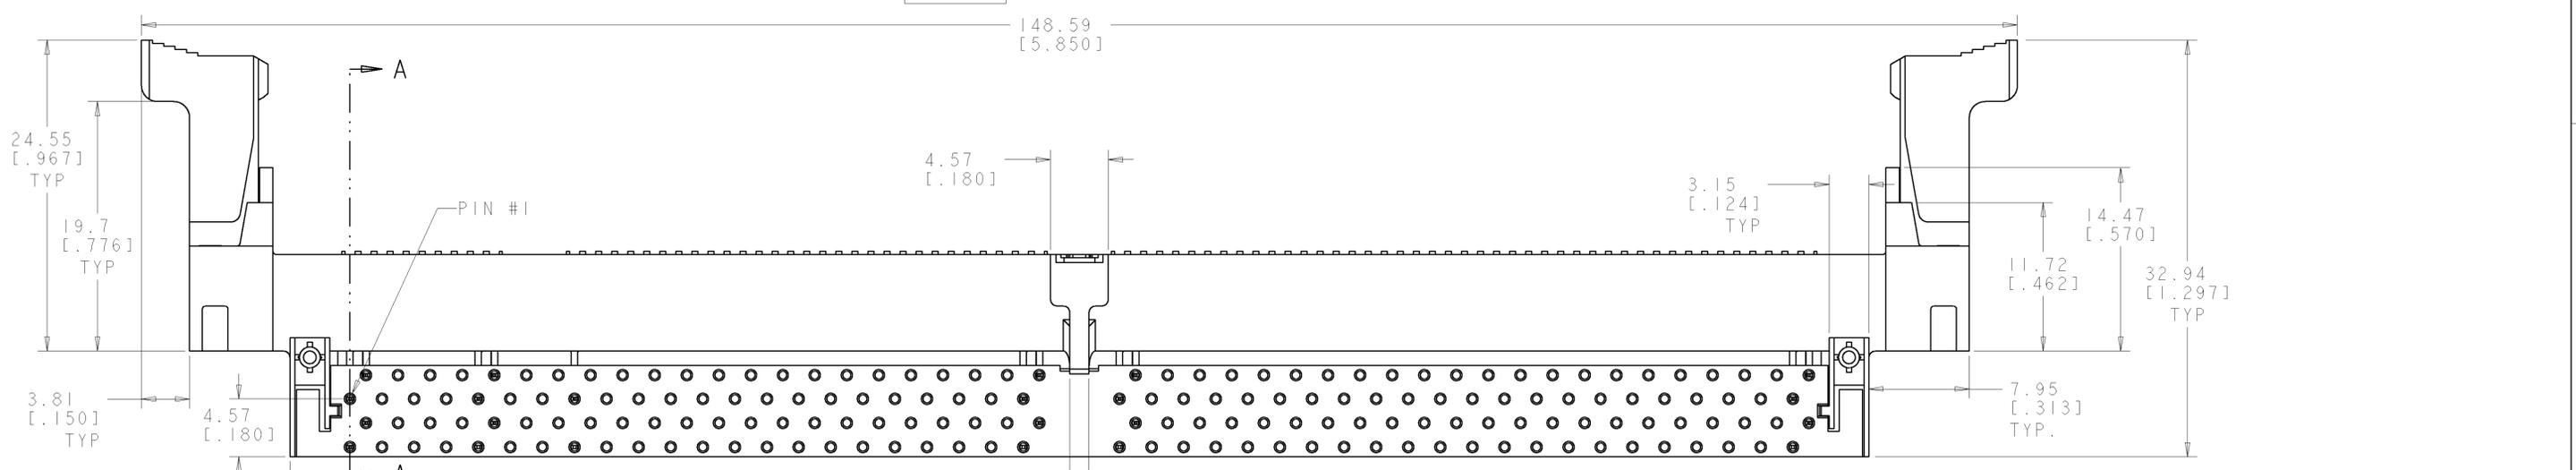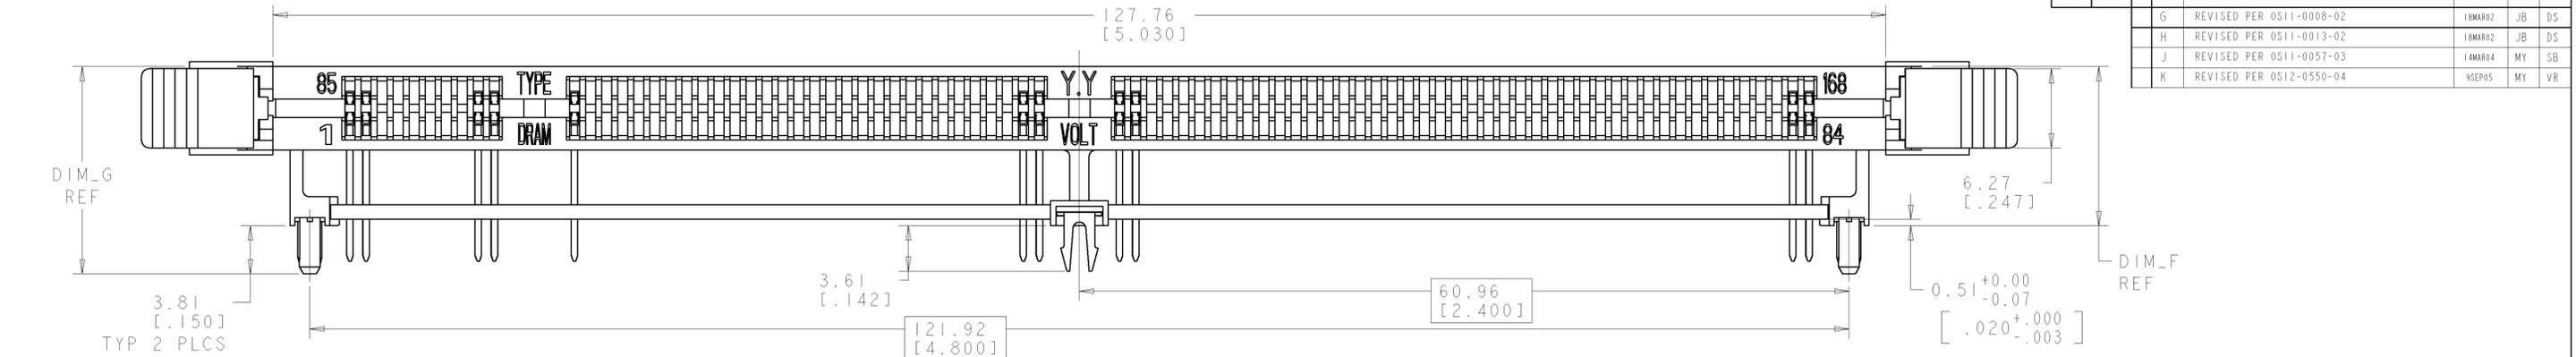

- △ MATERIAL:  
HOUSING:  
HIGH TEMPERATURE NYLON  
CONTACT:  
PHOSPHOR BRONZE
- △ FINISH:  
CONTACT AREA:  
0.00076 [.000030] MIN THICK GOLD OVER  
0.001270 [.000050] MIN THICK NICKEL.  
OR  
0.000076 [.000003] MIN THICK GOLD FLASH OVER  
0.000510 [.000020] MIN THICK PALLADIUM NICKEL OVER  
0.001270 [.000050] MIN THICK NICKEL.
- SOLDERTAIL:  
0.00381 [.000150] MIN THICK TIN LEAD OVER  
0.00064 [.000025] MIN THICK NICKEL.
- △ FOR OPTIMUM PERFORMANCE, PADS SHOULD BE SMOOTH AND  
FLAT PADS TO BE PLATED WITH:  
0.00102 [.000040] MIN THICK GOLD OVER  
0.00127 [.000050] MIN THICK NICKEL.
- △ 390171-6 IS SAME CONNECTOR AS 1-390171-0 EXCEPT WITH  
LUBRICATED CONTACTS.
- △ OBSOLETE

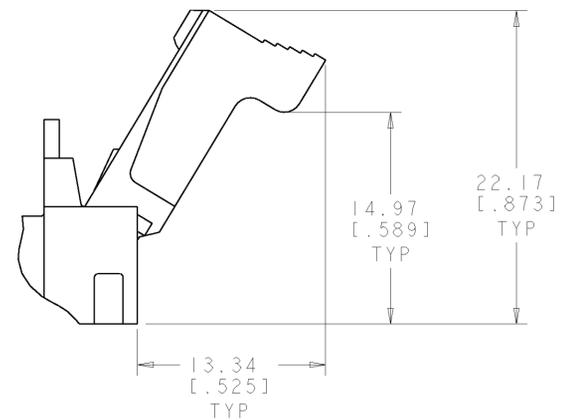

EXTRACTOR SHOWN IN THE OPEN POSITION

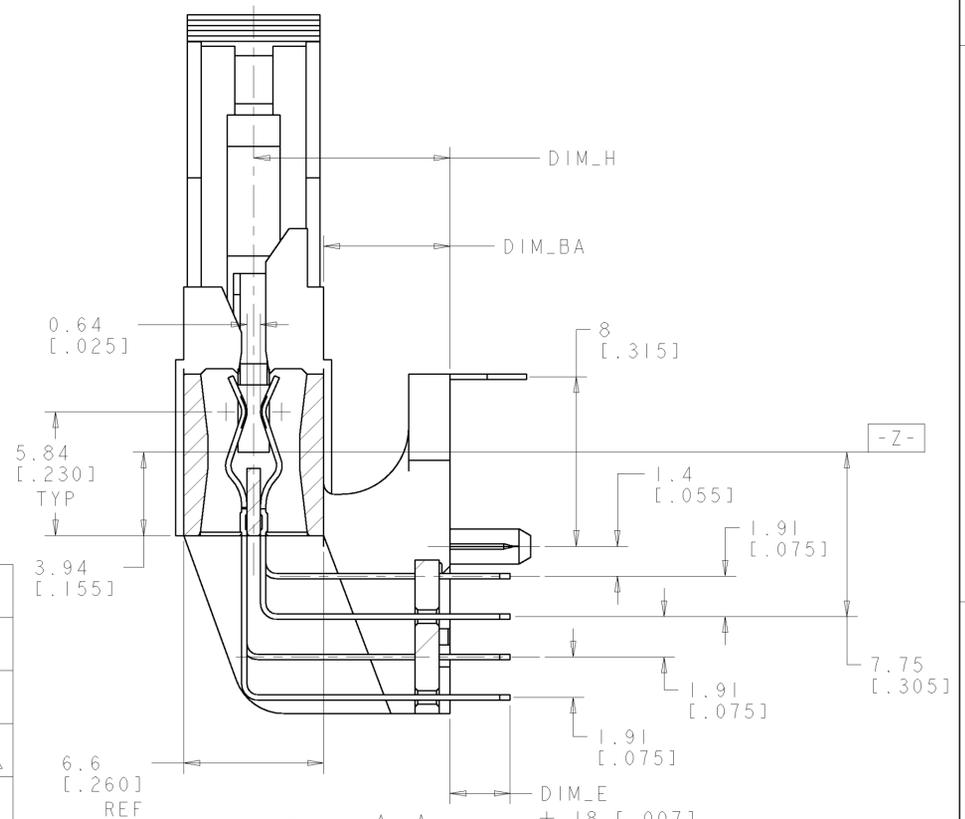

SECTION A-A  
SCALE 6:1

NB	3.3	10.92 [.430]	18.03 [.710]	14.22 [.560]	3.68 [.145]	7.62 [.300]	DETAIL C	DETAIL A	SYNC NON-BUFFERED DRAM, 3.3 VOLT	2-390171-6	
NB	3.3	10.92 [.430]	18.03 [.710]	14.22 [.560]	3.18 [.125]	7.62 [.300]	DETAIL C	DETAIL A	SYNC NON-BUFFERED DRAM, 3.3 VOLT	1-390171-6	
SYNC	3.3	10.92 [.430]	18.03 [.710]	14.22 [.560]	3.18 [.125]	7.62 [.300]	DETAIL B	DETAIL A	SYNC DRAM, 3.3 VOLT	1-390171-5	
STD	3.3	10.92 [.430]	18.03 [.710]	14.22 [.560]	3.18 [.125]	7.62 [.300]	DETAIL A	DETAIL A	STD DRAM, 3.3 VOLT	1-390171-4 △	
NB	3.3	9.27 [.365]	16.38 [.645]	12.57 [.495]	2.83 [.112]	5.97 [.235]	DETAIL C	DETAIL A	SYNC NON-BUFFERED DRAM, 3.3 VOLT	1-390171-0	
NB	3.3	9.27 [.365]	16.38 [.645]	12.57 [.495]	2.83 [.112]	5.97 [.235]	DETAIL C	DETAIL A	SYNC NON-BUFFERED DRAM, 3.3 VOLT	390171-6 △	
SYNC	3.3	9.27 [.365]	16.38 [.645]	12.57 [.495]	2.83 [.112]	5.97 [.235]	DETAIL B	DETAIL A	SYNC DRAM, 3.3 VOLT	390171-5	
STD	3.3	9.27 [.365]	16.38 [.645]	12.57 [.495]	2.83 [.112]	5.97 [.235]	DETAIL A	DETAIL A	STD DRAM, 3.3 VOLT	390171-4	
TYPE	Y.Y	DIM_H	DIM_G	DIM_F	DIM_E ±.18 [.007]		DIM_BA	KEY #1	KEY #2	PART DESCRIPTION	PART NUMBER

DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN J. BURWELL 29 JUNE 98		AMP Incorporated Harrisburg, PA 17105-3608	
0 PLC	±	0.13	[.005]	CHK D. HAMMER 29 JUNE 98	NAME	SOCKET, DIMM., DRO. RT ANGLE, 168 POSITION, 17.78mm LOCKING EXTRACTORS.	
1 PLC	±	0.13	[.005]	APPD	PRODUCT SPEC	SIZE	A1
2 PLC	±	0.13	[.005]		APPLICATION SPEC	CAGE CODE	00779
3 PLC	±	0.13	[.005]		WEIGHT	DRAWING NO	C=390171
4 PLC	±	0.13	[.005]		CUSTOMER DRAWING	SCALE	4:1
5 PLC	±	0.13	[.005]			SHEET	1 OF 2
6 PLC	±	0.13	[.005]			REV	K