
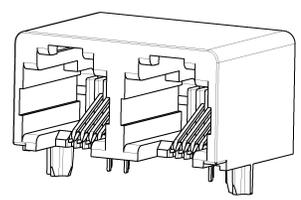
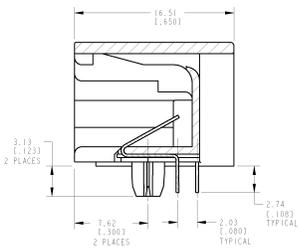




8	7	6	5	4	3	2	1
DATE REVISIONS	REVISIONS FOR FABRICATOR						
AA	22	REV. EC 06/14/04-95					

REV.	DATE	DESCRIPTION	BY	CHK	APP
AA	22	REV. EC 06/14/04-95	HHM	DLA	DLA

- △ MATERIAL - HOUSING-HIGH TEMPERATURE THERMOPLASTIC, BLACK. TERMINALS-0.36 (012) THICK COPPER ALLOY PLATED WITH 1.27mm (0.0050) MINIMUM THICK GOLD OR LOCALIZED GOLD PLATE AREA, 2.5mm (0.0010) MINIMUM TIN LEAD ON TERMINATION END. GROUT OVER 1.27mm (0.0050) MINIMUM NICKEL OVER ENTIRE TERMINAL.
- △ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- △ PACKAGING MATERIAL-ANTI-STATIC, RIGID EXTRUDED, TRANSPARENT PLASTIC TUBE 550, 0.01, 27, 102, 0.01 LONG, 20 PIECES PER TUBE. SEE DETAIL D.

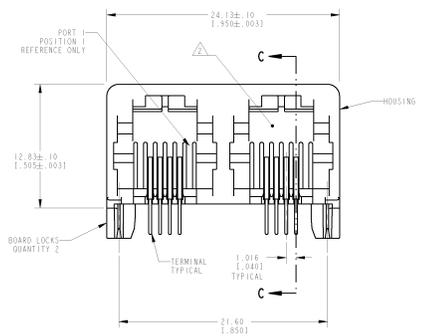

SECTION C-C

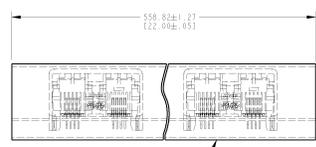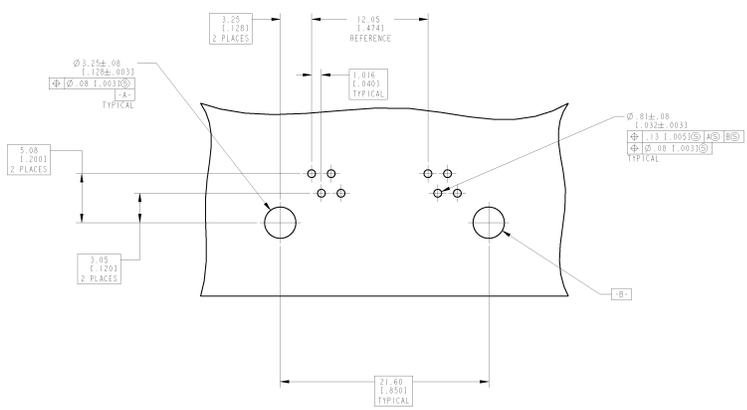

DETAIL D SCALE 2:1

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT COMPONENT SIDE VIEWED FROM TOP THICKNESS 1.271 (0.05)

		AMP CORPORATION 225 EAST 42ND STREET NEW YORK, NY 10017-2498
PART NUMBER 406904-1	PART NUMBER 406904-1	PART NUMBER 406904-1
MATERIAL THERMOPLASTIC	FINISH COPPER ALLOY PLATED WITH GOLD	WEIGHT 0.54 g (0.019)
DIMENSIONS 24.13 x 12.83 x 3.18	PART NUMBER 406904-1	PART NUMBER 406904-1