


Common Mode Chokes For Telecom Applications


Features

- Small size
- Excellent EMI reduction
- For use in xDSL, ISDN, T1/E1 and other Telecom applications
- Surface mount and through-hole designs
- Good isolation


Mechanical 1

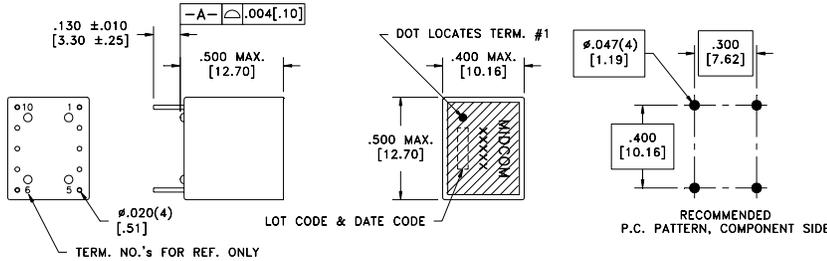

Mechanical 2

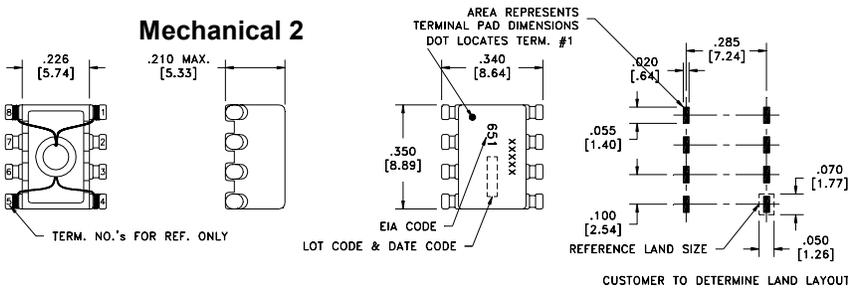


Mechanical 3

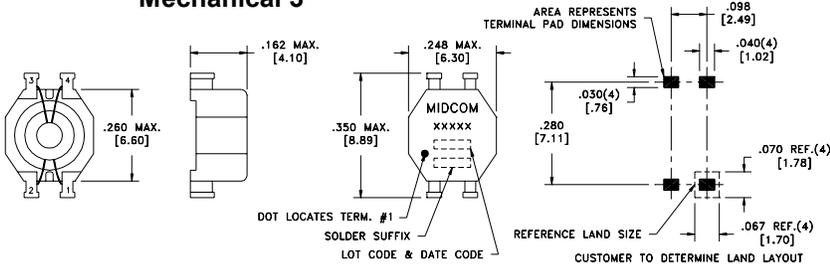


DCR Max.


Part Number	Inductance (µH)	(Ω each wind)	Mechanicals	Schematic
40864	9000	0.7	1	1
40190R	3100	0.7	2	2
40609R	4700	0.7	3	3



Schematic 1



Schematic 2



Schematic 3

Details subject to change. Contact your Midcom sales representative for additional information. Dimensions: in/mm. All tolerances are ±.010/0.25 and electrical specifications are @25°C unless otherwise specified.