

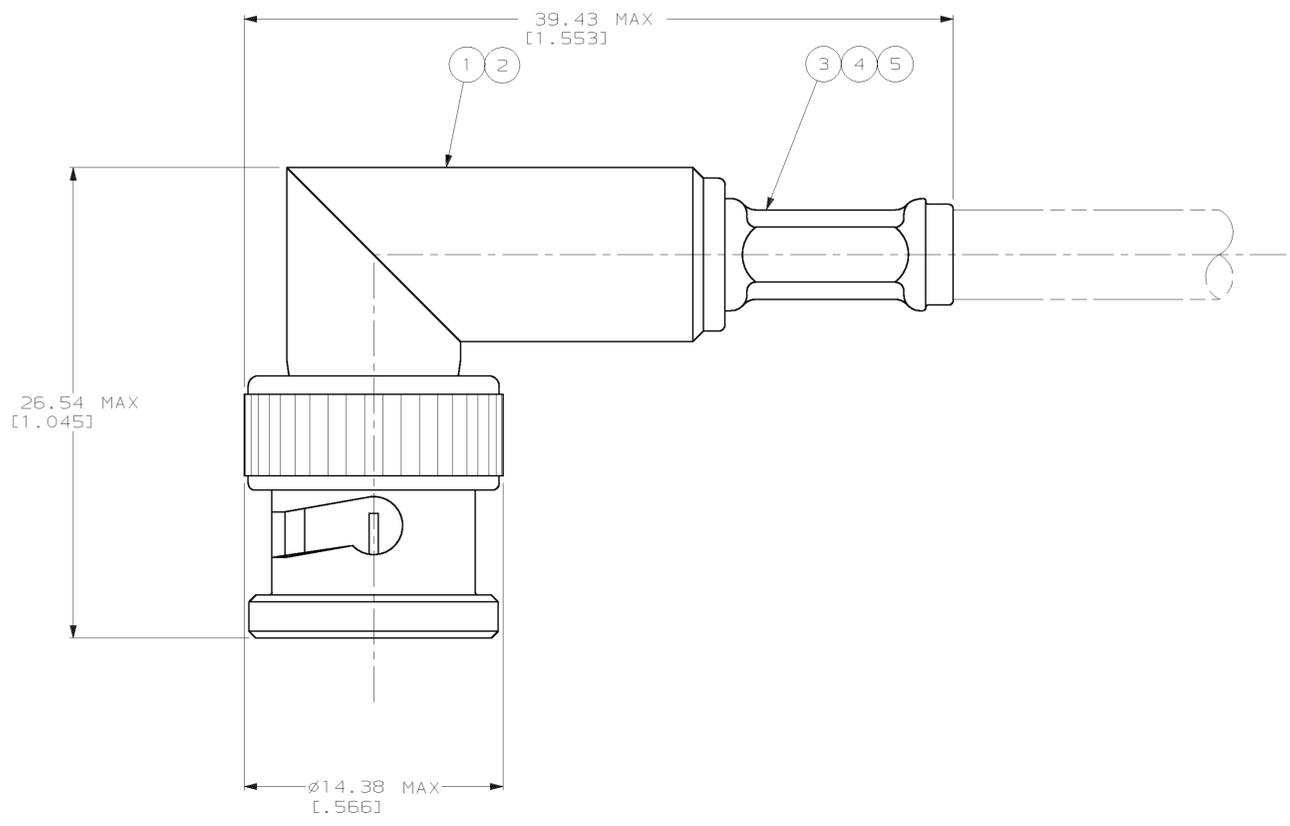


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AJ	16			G		0B5-1 & -6 PER 0U20-0076-01	26FEB01	MO

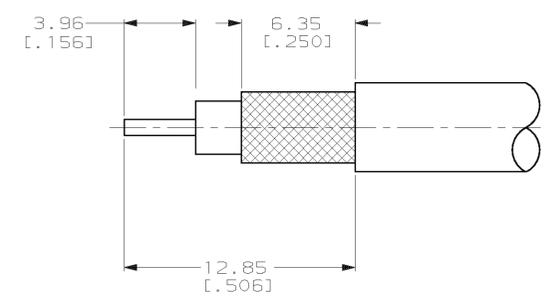

△ USE WITH HAND TOOL 220190-1
 2. SEE I.S. SHEET 9765

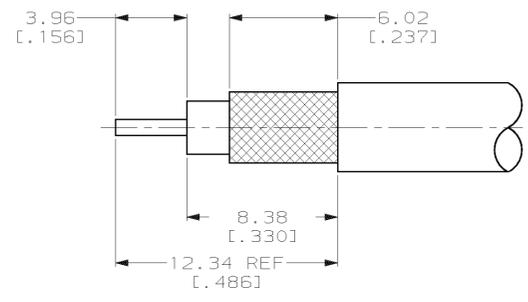

VIEW A

VIEW B

RECOMMENDED STRIP LENGTH

	AT&T 735A	A	1.07 [.042]	4.52 [.178]	852922-2	-	-	413658-6	1-413746-0	413947-2	1-413588-0
	RG-59 TYPE WITH .031 DIA CENTER CONDUCTOR, BELDEN 9240, 9259 & 9266	A	1.07 [.042]	6.48 [.255]	852922-1	-	-	221132-6	2-413746-0	413947-1	413588-9
	RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	A	1.07 [.042]	4.52 [.178]	852922-2	227194-2	1-222001-0	413658-9	1-413746-5	413947-2	413588-8
	AT&T 734A	A	1.07 [.042]	6.48 [.255]	852922-1	-	-	2-221132-0	2-413746-0	413947-4	413588-7
OBSOLETE	TIMES RG-59/U WITH DOUBLE BRAID & .270 OD JACKET	A	1.07 [.042]	8.23 [.324]	852922-3	-	-	221132-9	413746-5	413947-1	413588-6
	BELDEN 8281, 9231 & AT&T 728	B	1.07 [.042]	8.23 [.324]	852922-3	-	-	221132-9	2-413746-0	413947-3	413588-5
	AT&T KS 19224 L2	A	1.07 [.042]	4.52 [.178]	852922-2	227194-2	1-222001-0	413658-6	1-413746-5	413947-2	413588-4
	BELDEN 8218	A	1.07 [.042]	4.52 [.178]	852922-2	-	-	3-221132-3	1-413746-0	413947-2	413588-3
	RG-59/U, 59A/U & 59B/U	A	1.07 [.042]	6.48 [.255]	852922-1	-	-	221132-6	413746-5	413947-1	413588-2
OBSOLETE	BELDEN 88241	A	1.07 [.042]	6.48 [.255]	852922-1	-	-	413658-3	413746-5	413947-1	413588-1
	FOR USE WITH CABLE	VIEW	CONTACT CRIMP (SQUARE)	FERRULE CRIMP (HEX)	DIE SET △	⑤ TUBING, PLASTIC QTY=1	④ TUBING, METAL QTY=1	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSY QTY=1	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES]		TOLERANCES ON:		MATERIAL		FINISH		WEIGHT							
DR	J. KURTZ	9/12/90		CHK	R. E. RUTH	9/20/90		APPD	M. PHILLIPS	9/20/90		APPD	R. E. RUTH	9/20/90	
AMP		AMP Incorporated		Harrisburg, PA 17105-3508		PLUG, RIGHT ANGLE, HEX CRIMP, 75 OHM, BNC		SIZE D		CAGE CODE 00779		DRAWING NO 413588		SCALE 5:1	
PART NO												SHEET 1 OF 1			