

LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE		APPD	
AJ		16		P		F				D		REVISED PER 0220-0219-96		5-22-96		JG	

- 1

ZINC PER QQ-Z-363
- 2

BERYLLIUM COPPER PER QQ-C-530
- 3

PTFE PER MIL-P-19468
- 4




NICKEL PLATE PER QQ-N-290, .0051 [.000200] MINIMUM THICKNESS
- 5

GOLD PLATE PER MIL-G-45204 .0013 [.000050] MINIMUM THICKNESS
- 6

INTERMATEABLE WITH PRODUCT PER MIL-C-39012
- 7

MAJOR THREAD DIAMETER TO BE .437/.427, DIMENSION TO BE MEASURED 90° OPPOSITE THE PARTING LINE.
- 8

POLYMETHYLPENTENE, GENERAL PURPOSE

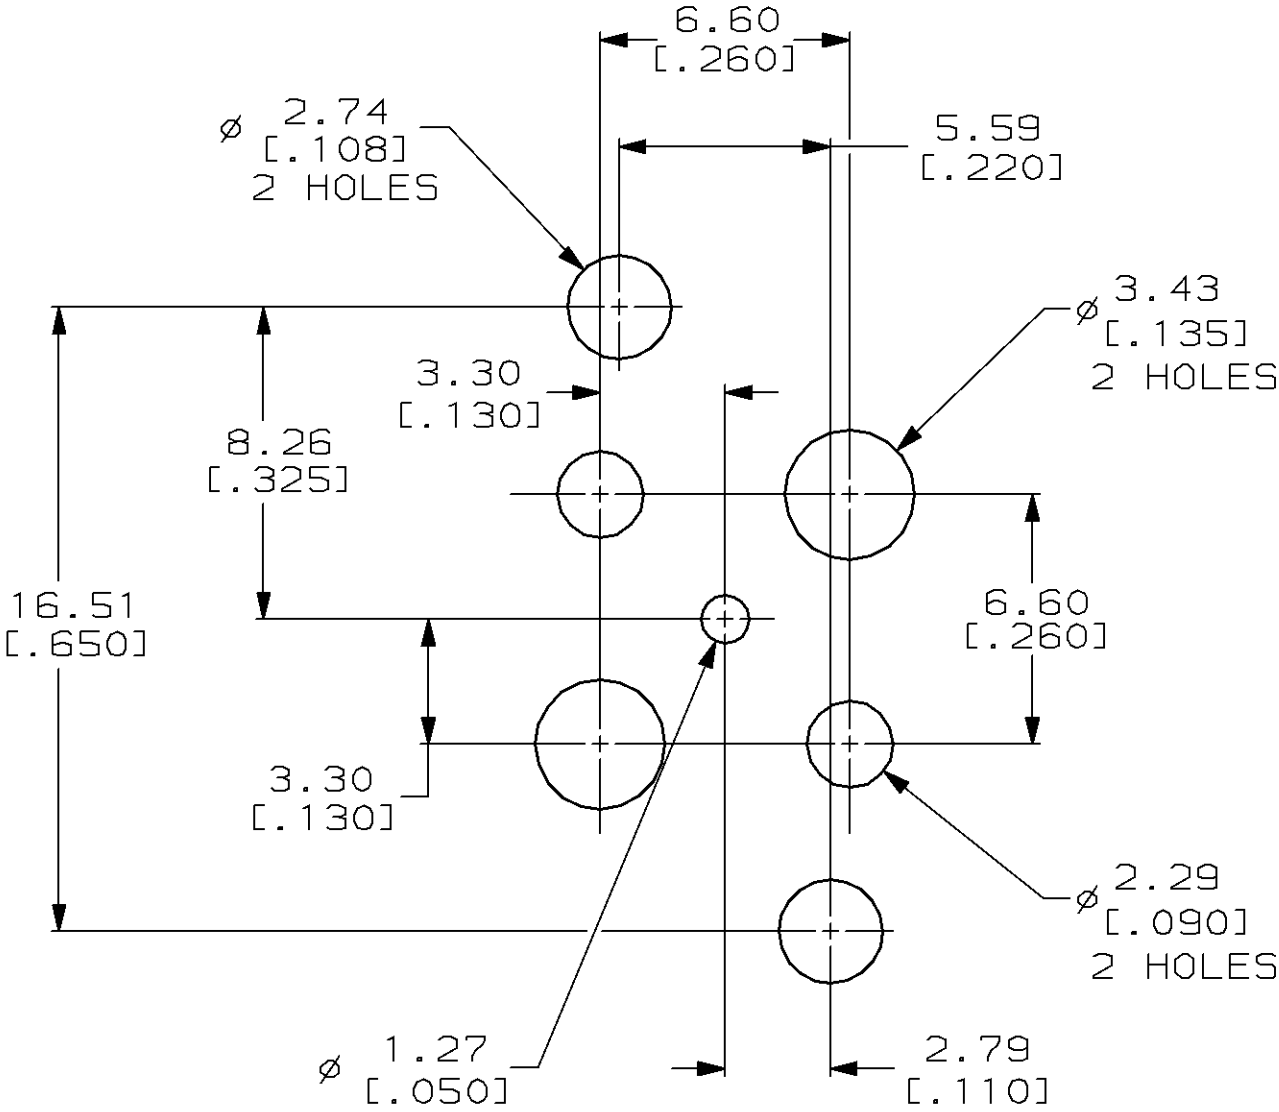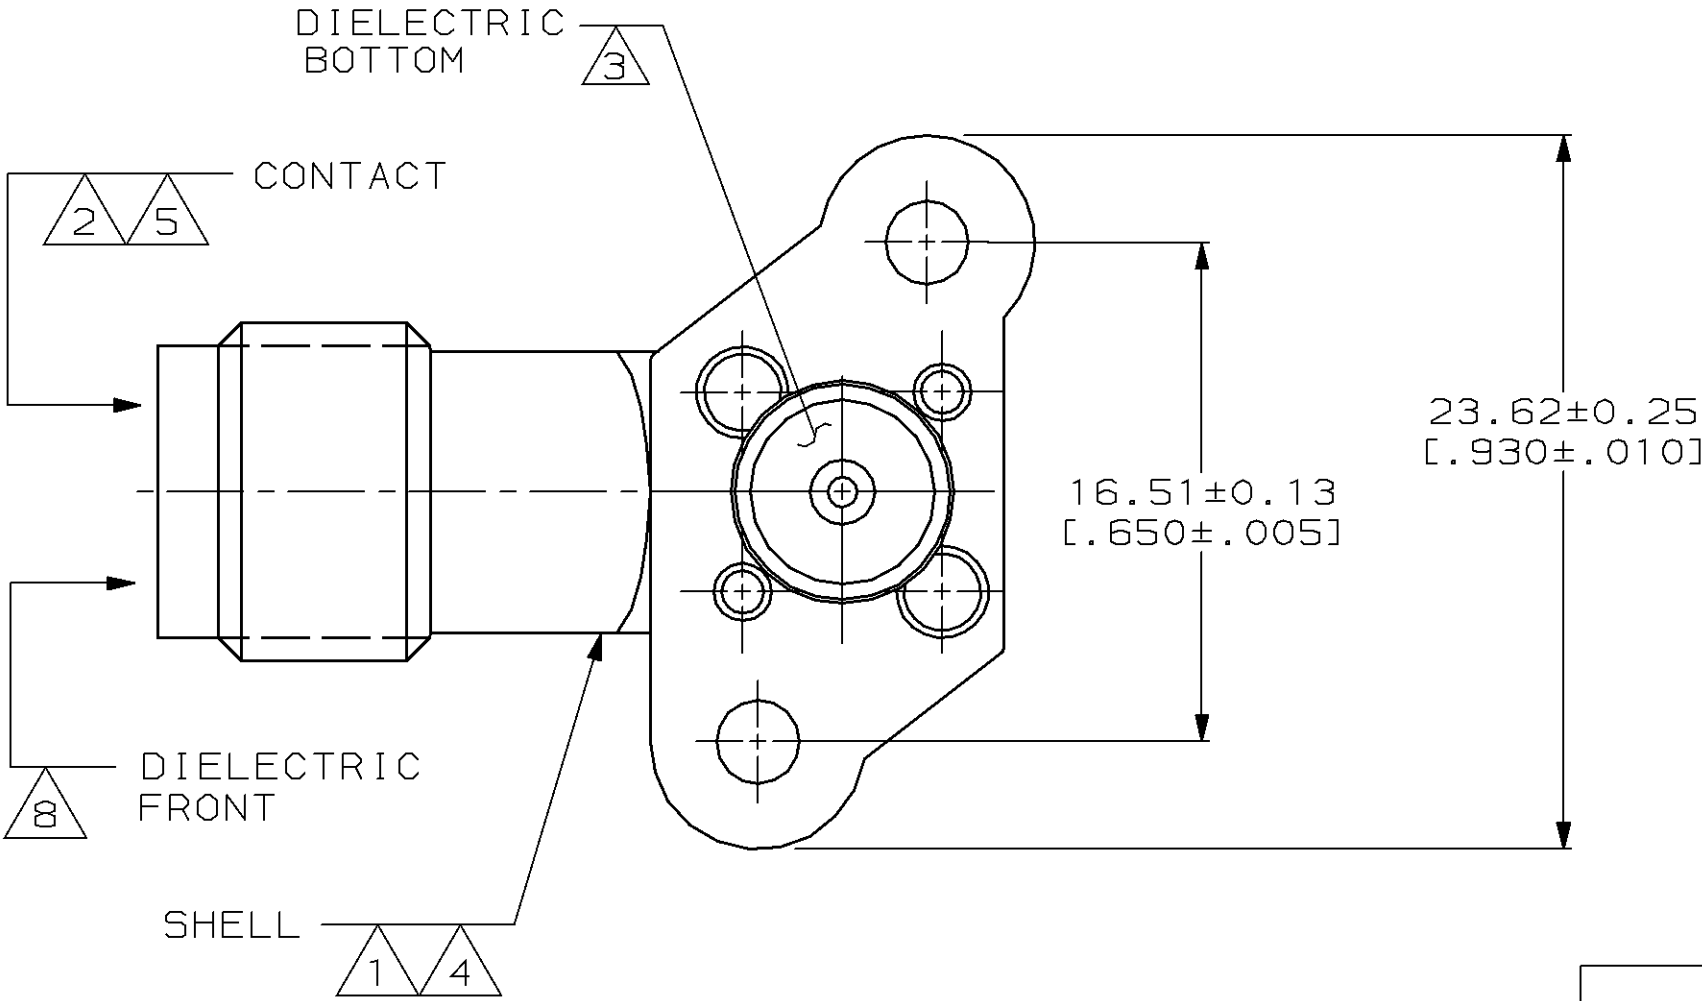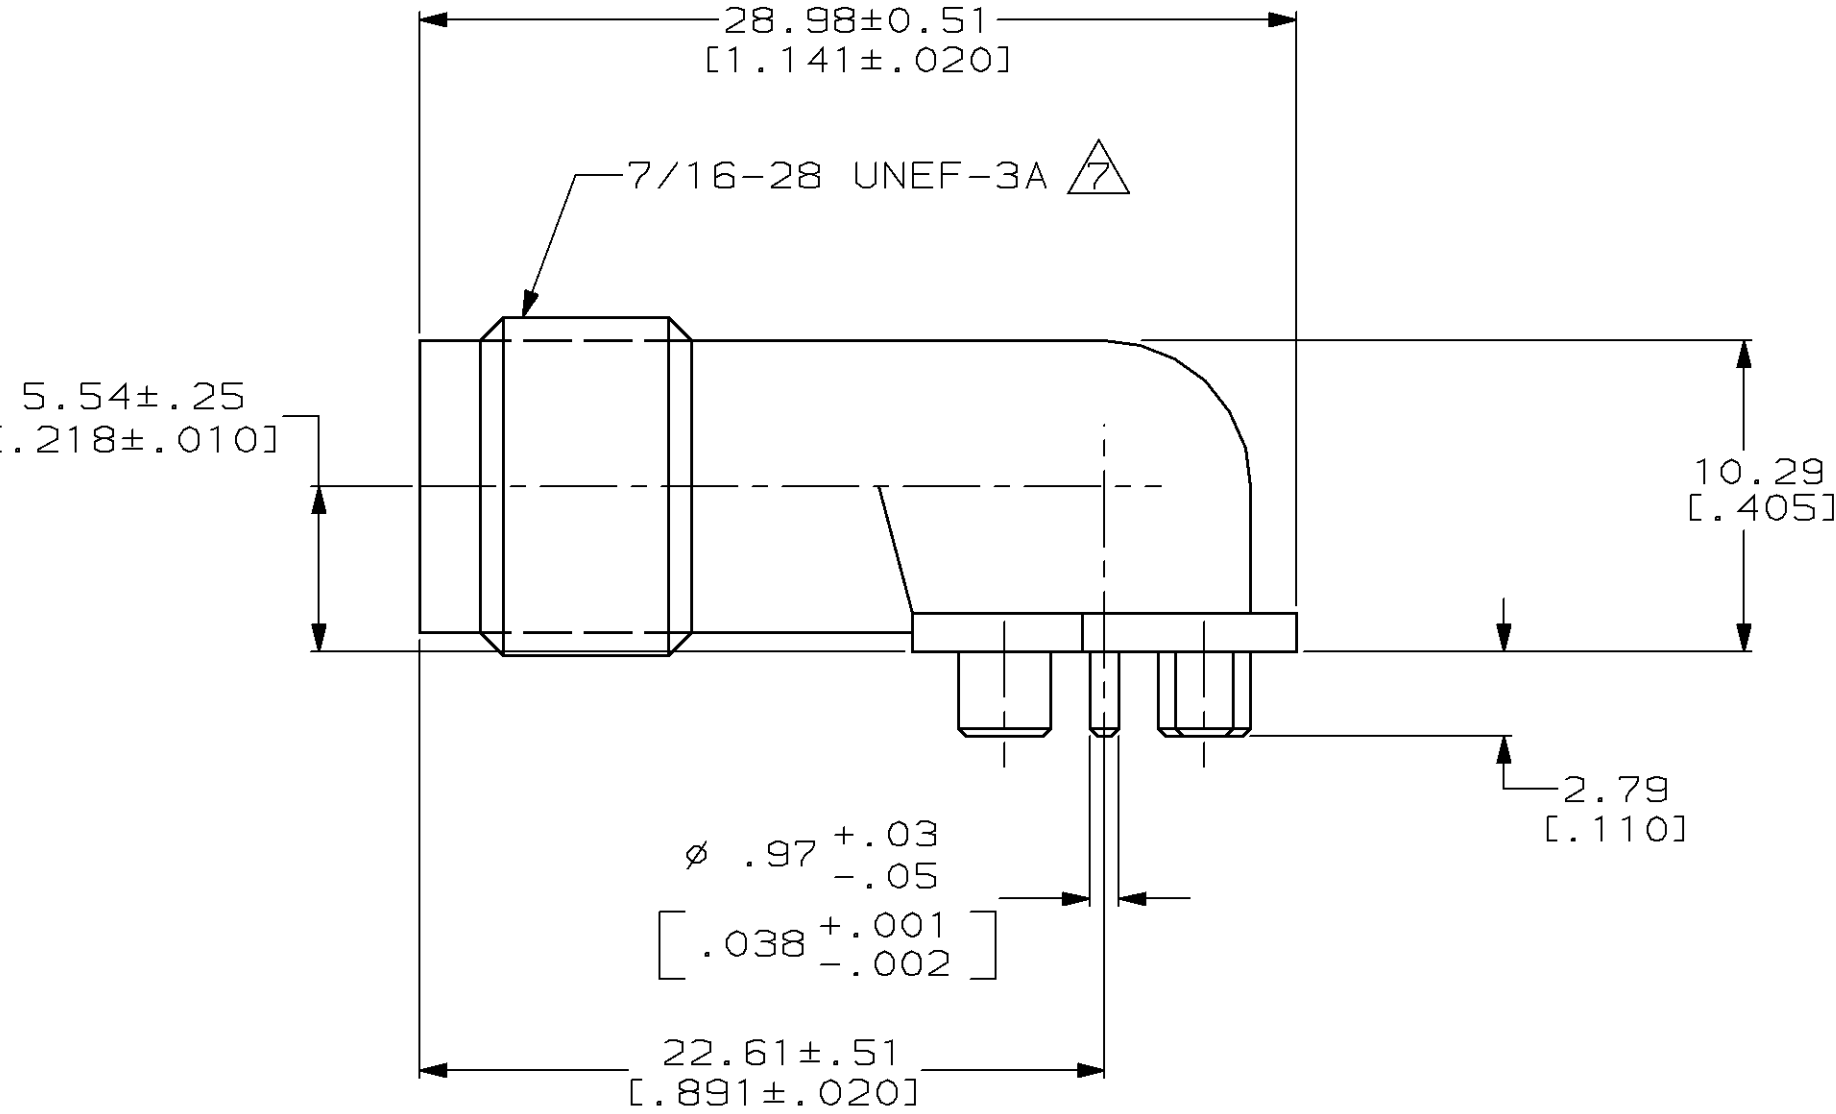

PCB CONFIGURATION
SCALE 5:1

413933-1
PART NUMBER

					PART NO				
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.08 [.003] 3 PLC DEC ± - ANGLES ± - MATERIAL 		DR 8-21-90 B. WERNER		 AMP Incorporated Harrisburg, PA 17105-3608 NAME JACK, RIGHT ANGLE, PCB, 50 OHM, SERIES TNC					
		CHK 9-4-90 R.E.RUTH							
		APPD 9-4-90 R. HENRY							
		APPD 9-4-90 B. WERNER							
		PRODUCT SPEC -							
FINISH 		APPLICATION SPEC -		SIZE 	CAGE CODE 00779		DRAWING NO 413933		
		WEIGHT -		SCALE 4:1			SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[413933-1](#)