




Model 416

Miniature Surface Mount Crystal

Features

- Hermetic Ceramic Surface Mount Package
- Fundamental Crystal Design
- Frequency Range 24 – 80MHz
- Frequency Tolerance, $\pm 20\text{ppm}$ Standard
- Frequency Stability, $\pm 20\text{ppm}$ Standard
- Operating Temperature Range to -40°C to $+85^{\circ}\text{C}$
- Tape and Reel Packaging, EIA-418



Part Dimensions:
 $1.6 \times 1.2 \times 0.45\text{mm}$ • 2.51054mg

Applications

- Wearable and Handheld Electronics
- Wireless Communications
- FPGA/Microcontrollers
- Computer Peripherals
- USB Interfaces
- Measuring Equipment
- Consumer Electronics
- High Density Board Layouts

Description

CTS Model 416 incorporates a high Q quartz resonator and is ideal for supporting a wide range of commercial and industrial applications.

Ordering Information

Model	Mode of Oscillation	Frequency Code [MHz]	Tolerance @ +25°C	Temperature Stability	Temperature Range	Load Capacitance	Packaging																																												
416	F	XXX	3	5	C	D	R																																												
<table><tr><th>Code</th><th>Mode</th></tr><tr><td>F</td><td>Fundamental</td></tr></table>		Code	Mode	F	Fundamental	<table><tr><th>Code</th><th>Tolerance</th></tr><tr><td>1</td><td>±10ppm</td></tr><tr><td>X</td><td>±15ppm</td></tr><tr><td>2</td><td>±20ppm</td></tr><tr><td>Y</td><td>±25ppm</td></tr><tr><td>3</td><td>±30ppm</td></tr></table>		Code	Tolerance	1	±10ppm	X	±15ppm	2	±20ppm	Y	±25ppm	3	±30ppm	<table><tr><th>Code</th><th>Temp. Range</th></tr><tr><td>A</td><td>-10°C to +60°C</td></tr><tr><td>C</td><td>-20°C to +70°C</td></tr><tr><td>D</td><td>-30°C to +85°C</td></tr><tr><td>I</td><td>-40°C to +85°C</td></tr></table>		Code	Temp. Range	A	-10°C to +60°C	C	-20°C to +70°C	D	-30°C to +85°C	I	-40°C to +85°C	<table><tr><th>Code</th><th>Packing</th></tr><tr><td>R</td><td>3k pcs./reel</td></tr></table>		Code	Packing	R	3k pcs./reel														
Code	Mode																																																		
F	Fundamental																																																		
Code	Tolerance																																																		
1	±10ppm																																																		
X	±15ppm																																																		
2	±20ppm																																																		
Y	±25ppm																																																		
3	±30ppm																																																		
Code	Temp. Range																																																		
A	-10°C to +60°C																																																		
C	-20°C to +70°C																																																		
D	-30°C to +85°C																																																		
I	-40°C to +85°C																																																		
Code	Packing																																																		
R	3k pcs./reel																																																		
<table><tr><th>Code</th><th>Frequency</th></tr><tr><td colspan="2">Product Frequency Code ¹</td></tr></table>		Code	Frequency	Product Frequency Code ¹		<table><tr><th>Code</th><th>Stability</th></tr><tr><td>1</td><td>±10ppm ²</td></tr><tr><td>X</td><td>±15ppm</td></tr><tr><td>2</td><td>±20ppm</td></tr><tr><td>Y</td><td>±25ppm</td></tr><tr><td>3</td><td>±30ppm</td></tr><tr><td>5</td><td>±50ppm</td></tr></table>		Code	Stability	1	±10ppm ²	X	±15ppm	2	±20ppm	Y	±25ppm	3	±30ppm	5	±50ppm	<table><tr><th>Code</th><th>Capacitance</th><th>Code</th><th>Capacitance</th></tr><tr><td>W</td><td>5pF</td><td>L</td><td>12pF</td></tr><tr><td>T</td><td>6pF</td><td>C</td><td>16pF</td></tr><tr><td>V</td><td>7pF</td><td>D</td><td>18pF</td></tr><tr><td>K</td><td>8pF</td><td>E</td><td>20pF</td></tr><tr><td>J</td><td>9pF</td><td>S</td><td>Series</td></tr><tr><td>A</td><td>10pF</td><td></td><td></td></tr></table>		Code	Capacitance	Code	Capacitance	W	5pF	L	12pF	T	6pF	C	16pF	V	7pF	D	18pF	K	8pF	E	20pF	J	9pF	S	Series	A	10pF		
Code	Frequency																																																		
Product Frequency Code ¹																																																			
Code	Stability																																																		
1	±10ppm ²																																																		
X	±15ppm																																																		
2	±20ppm																																																		
Y	±25ppm																																																		
3	±30ppm																																																		
5	±50ppm																																																		
Code	Capacitance	Code	Capacitance																																																
W	5pF	L	12pF																																																
T	6pF	C	16pF																																																
V	7pF	D	18pF																																																
K	8pF	E	20pF																																																
J	9pF	S	Series																																																
A	10pF																																																		

Notes:

1] Refer to document 016-1454-0, Frequency Code Tables. 3-digits for frequencies $<100\text{MHz}$.

2] Check factory availability when combined with -40°C to $+85^{\circ}\text{C}$ temperature range.

Not all performance combinations and frequencies may be available.
Contact your local CTS Representative or CTS Customer Service for availability.



Electrical Specifications

Operating Conditions

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Temperature	T_A	-	-10	+25	+60	°C
			-20		+70	
			-30		+85	
			-40		+85	
Storage Temperature	T_{STG}	-	-40	-	+90	°C

Frequency Stability

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Frequency Range	f_0	-		24 - 80		MHz
Frequency Tolerance	$\Delta f/f_0$	@ +25°C		10, 15, 20, 25 or 30		±ppm
Frequency Stability	$\Delta f/f_{25}$	Referenced to +25°C reading		10, 15, 20, 25, 30 or 50		±ppm
Aging	$\Delta f/f_0$	Typical per year @ +25°C	-	±3	-	ppm

Crystal Parameters


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Mode	-	-		Fundamental		-
Crystal Cut	-	-		AT-Cut Strip		-
Load Capacitance	C_L	-		See Ordering Information		pF
Shunt Capacitance	C_0	-	-	3.0	5.0	pF
Series Resistance						
Fundamental	R_1	24MHz - <30MHz	-	-	120	Ω
		30MHz - <37MHz	-	-	80	
		37MHz - <80MHz	-	-	60	
Drive Level	DL	-	-	10	200	μW
Insulation Resistance	R_i	+100Vdc ±15Vdc	500	-	-	MΩ

$\Delta f/f_0$ - Frequency deviation referenced to nominal frequency.

$\Delta f/f_{25}$ - Frequency deviation referenced to +25°C frequency.

Mechanical Specifications

Package Drawing

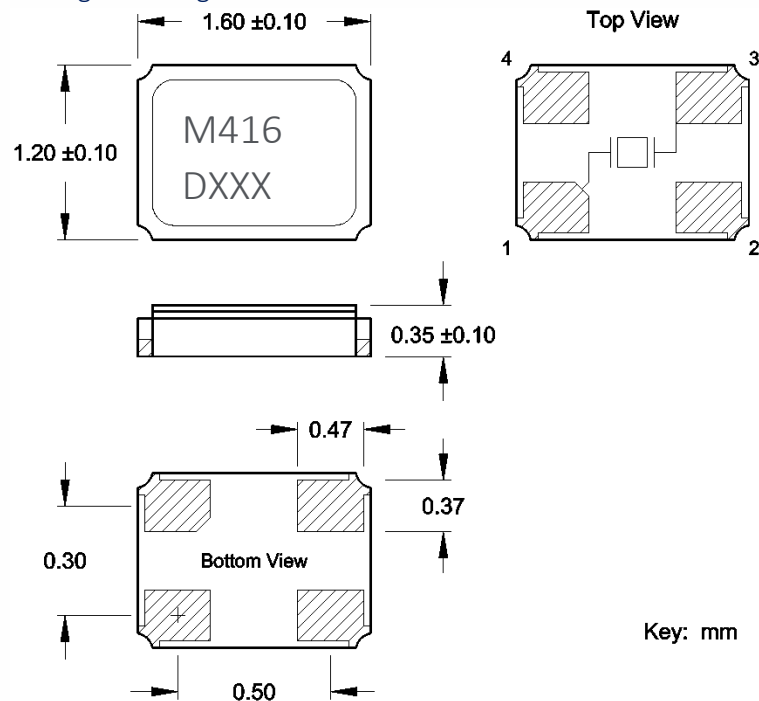

Key: mm

Marking Information

Format A – 2 Lines [Preferred]

M416
DXXX


1. M416 – CTS Model series.
 2. D – Date code. See Table I for codes.
 3. XXX – Frequency code, 3-digits frequencies below 100MHz.
- [See document 016-1454-0, Frequency Code Tables].

Format B – 1 Line [Acceptable]

XXXYYWW

1. XXX – XXX – Frequency code, 3-digits frequencies below 100MHz.
 2. YWW – Date code; Y = year [last digit], WW = week.
- [See document 016-1454-0, Frequency Code Tables].

Recommended Pad Layout

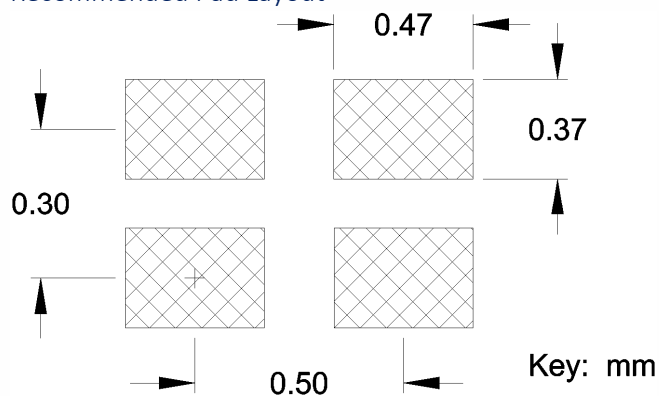


Key: mm

Notes


1. Terminations #2, #4 and metal lid are connected internally. End user may connect these pins to circuit ground for EMI suppression.
2. JEDEC termination code (e4). Barrier-plating is nickel [Ni] with gold [Au] flash plate.
2. Reflow conditions per JEDEC J-STD-020; +260°C maximum, 20 seconds.
3. MSL = 1.

Packaging - Tape and Reel

Tape Drawing

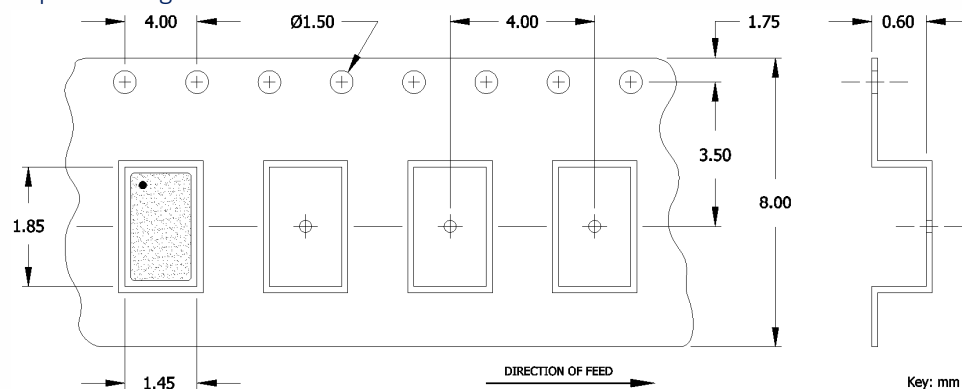

Reel Drawing

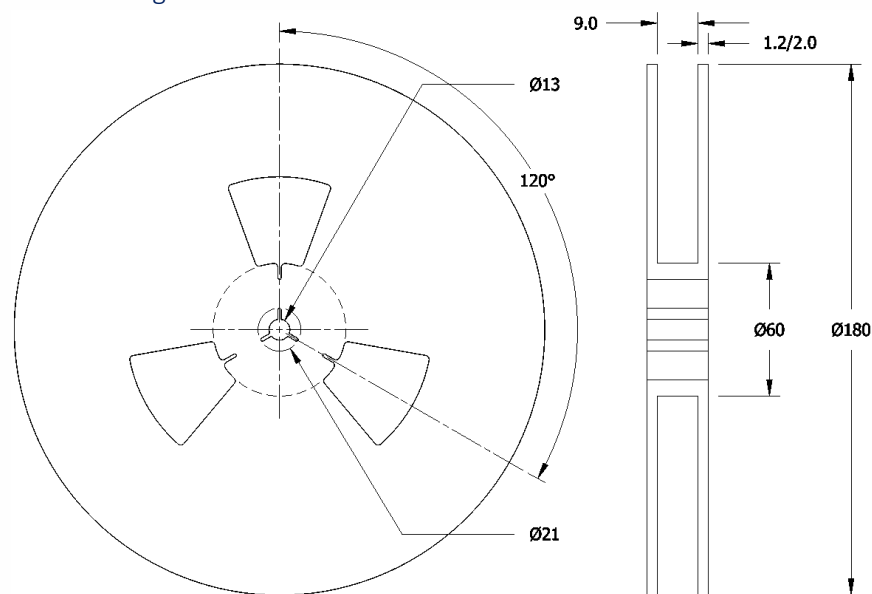

Notes

1. Device quantity is 3k pieces maximum per 180mm reel.
2. Complete CTS part number, frequency value, date code and manufacturing site code information must appear on reel and carton labels.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CTS:

[416F40022IKT](#) [416F36022CKT](#) [416F48022IKT](#) [416F52022CKT](#) [416F52022IKT](#) [416F30022CKT](#) [416F44022CKT](#)
[416F27022CKT](#) [416F32022IKT](#) [416F24022IKT](#) [416F40022CKT](#) [416F32022CKT](#) [416F48022CKT](#) [416F26022IKT](#)
[416F26022CKT](#) [416F36022IKT](#) [416F24012IST](#) [416F26025CLT](#) [416F440X3CST](#) [416F440XXCLT](#) [416F440XXAST](#)
[416F260XXCKT](#) [416F440X3IST](#) [416F440XXCKT](#) [416F48011ADT](#) [416F44013IST](#) [416F4401XAST](#) [416F4401XCLT](#)
[416F44013CST](#) [416F44022CLT](#) [416F44022CST](#) [416F44022IAT](#) [416F44035AST](#) [416F44012IST](#) [416F44013ADT](#)
[416F44013CDT](#) [416F44033AKT](#) [416F44035AKT](#) [416F440X2AKT](#) [416F440X2CST](#) [416F44025AAT](#) [416F44022IDT](#)
[416F44025CKT](#) [416F44025IAT](#) [416F440X3ALT](#) [416F44023CST](#) [416F44033ITT](#) [416F440X2AST](#) [416F44035ALT](#)
[416F440X2AAT](#) [416F44025CDT](#) [416F44025IDT](#) [416F44033IAT](#) [416F44033IDT](#) [416F440X3AKT](#) [416F440X3CDT](#)
[416F440X3ITT](#) [416F44022AKT](#) [416F44011CTT](#) [416F44023CLT](#) [416F44023IST](#) [416F44011ALT](#) [416F406X3CST](#)
[416F406X3ITT](#) [416F44012ALT](#) [416F44012AST](#) [416F406XXALT](#) [416F40635IST](#) [416F406X2ILT](#) [416F406X3AKT](#)
[416F4401XCST](#) [416F4401XCTT](#) [416F406X3AAT](#) [416F44013ILT](#) [416F44013CLT](#) [416F44013CAT](#) [416F40633ADT](#)
[416F40622IKT](#) [416F44013AAT](#) [416F44013AST](#) [416F440XXAKT](#) [416F40623CKT](#) [416F40625ALT](#) [416F44035ILT](#)
[416F440X2IST](#) [416F440X3CLT](#) [416F440X3IDT](#) [416F406X2ALT](#) [416F3201XCST](#) [416F40625IST](#) [416F32013ITT](#)
[416F3201XCAT](#) [416F32022AKT](#) [416F32013IDT](#) [416F32013IST](#) [416F406X3ILT](#) [416F40633ALT](#) [416F40623AAT](#)
[416F32025CAT](#) [416F32025IAT](#)