

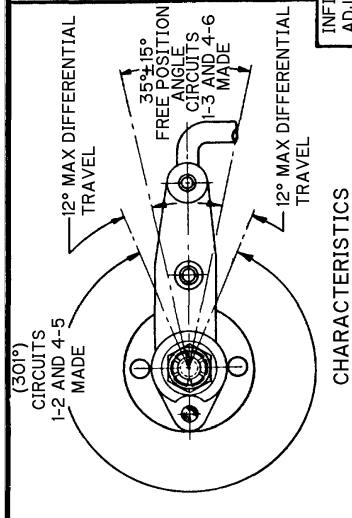


9-13H17

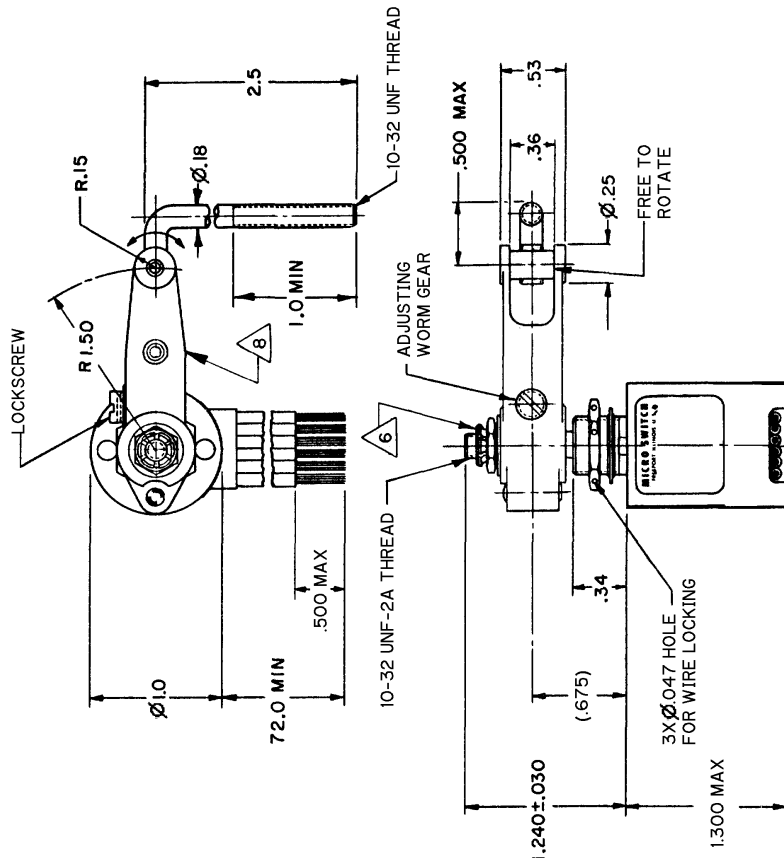


LEVER MAY BE ADJUSTED FOR AN INFINITE NUMBER OF POSITIONS THRU 360°. ADJUSTMENT IS MADE BY LOOSENING THE LOCKING NUT AND THEN THE LOCKSCREW AND TURNING GEAR UNTIL LEVER IS IN DESIRED POSITION. LOCKSCREW AND LOCKNUT ON SHAFT IS THEN TIGHTENED TO POSITIVELY LOCK LEVER IN POSITION

LEVER ADJUSTMENT DETAIL - SCALE 2:1



CORROSION RESISTANT STEEL SHAFT, BUSHING AND PINS

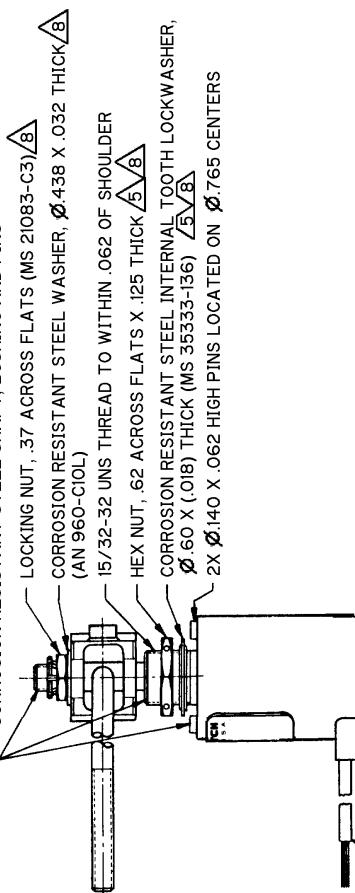

**ANSI Y14.5M-1982 APPLIES
THIRD ANGLE PROJECTION**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH			
CHARACTERISTICS OPERATING TORQUE --- 3 IN-LB MAX		ELECTRICAL DATA CONTACT ARRANGEMENT 2X S P D T ∇	
PRETRAVEL DIFFERENTIAL TRAVEL OVERTRAVEL FREE POSITION		28 VOLTS DC RATING INDUCTIVE -- SEA LEVEL - 1/4 AMP 70,000 FT - 1/4 AMP RESISTIVE -- SEA LEVEL - 1/2 AMP 70,000 FT - 1/2 AMP	
SCALE		FULL	
DO NOT SCALE PRINT		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE		(.001) $\pm$.030	
TWO PLACE		(.001) $\pm$.015	
THREE PLACE		(.0001) $\pm$.005	
ANGLES		$\pm$	
WEIGHT		.52 LB	

NOIES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
2 - UNIT PROVIDES NO SHAFT RESTORING TORQUE. THE ACTUATING DEVICE MUST CONTROL MOVEMENT OF THE SHAFT
3 - CIRCUIT DIAGRAM, CATALOG LISTING, DATE CODE AND FEDERAL MANUFACTURING CODE ARE SHOWN ON NAMEPLATE
4 - SWITCH SEALED PER MIL-8805 SYMBOL 5
5 - REPLACEMENT MOUNTING HARDWARE: PACKET 19PA10
6 - DO NOT APPLY MORE THAN 20-25 IN/LB OF TORQUE WHEN TIGHTENING LOCKING NUT
7 - BIFURCATED GOLD CONTACT BASIC SWITCHES
8 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805