


SERIES

4212R
4212

RoHS
Compliant
Traditional
First Quality

Wound Beads

MINIMUM IMPEDANCE
DASH NUMBER* FIGURE TURNS 10 MHz 50 MHz 100 MHz 150 MHz 200 MHz 220 MHz

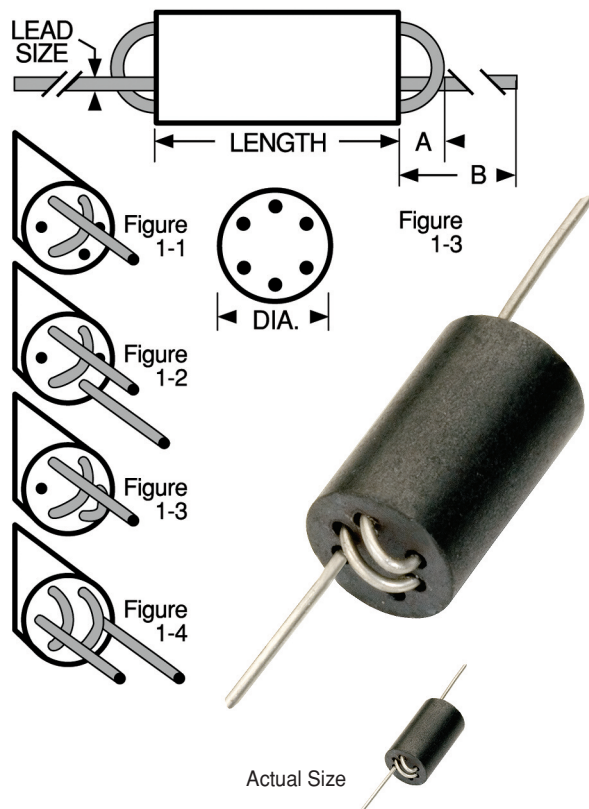

SERIES 4212R / 4212								
DASH NUMBER*	FIGURE	TURNS	10 MHz	50 MHz	100 MHz	150 MHz	200 MHz	220 MHz
-1	1-3	2 1/2	—	—	750	700	—	400
-2	1-3	2 1/2	325	—	575	525	—	—
-3	1-1	1 1/2	—	325	425	—	400	—
-4	1-1	1 1/2	170	320	375	—	—	—
-5	1-2	2	—	525	600	—	600	—
-6	1-2	2	240	520	480	—	—	—
-7	1-4	3	—	950	900	—	600	—
-8	1-4	3	400	800	550	—	—	—

*Complete part # must include series # PLUS the dash #

For surface finish information, refer to www.delevanfinishes.com

Physical Parameters

	Inches	Millimeters
Length	0.374 to 0.414	9.50 to 10.51
Diameter	0.216 to 0.256	5.48 to 6.35
Lead Size		
AWG #24 TCW	0.0185 to 0.0215	0.47 to 0.55
A	0.12 Max.	3.05 Max.
B	1.10 Min.	28.0 Min.


Impedances measured on HP 4191A Impedance Analyzer.

High resistivity ferrite material eliminates the need to insulate windings.

Lead Wire Plated copper

Packaging Bulk only

For more detailed graphs, contact factory

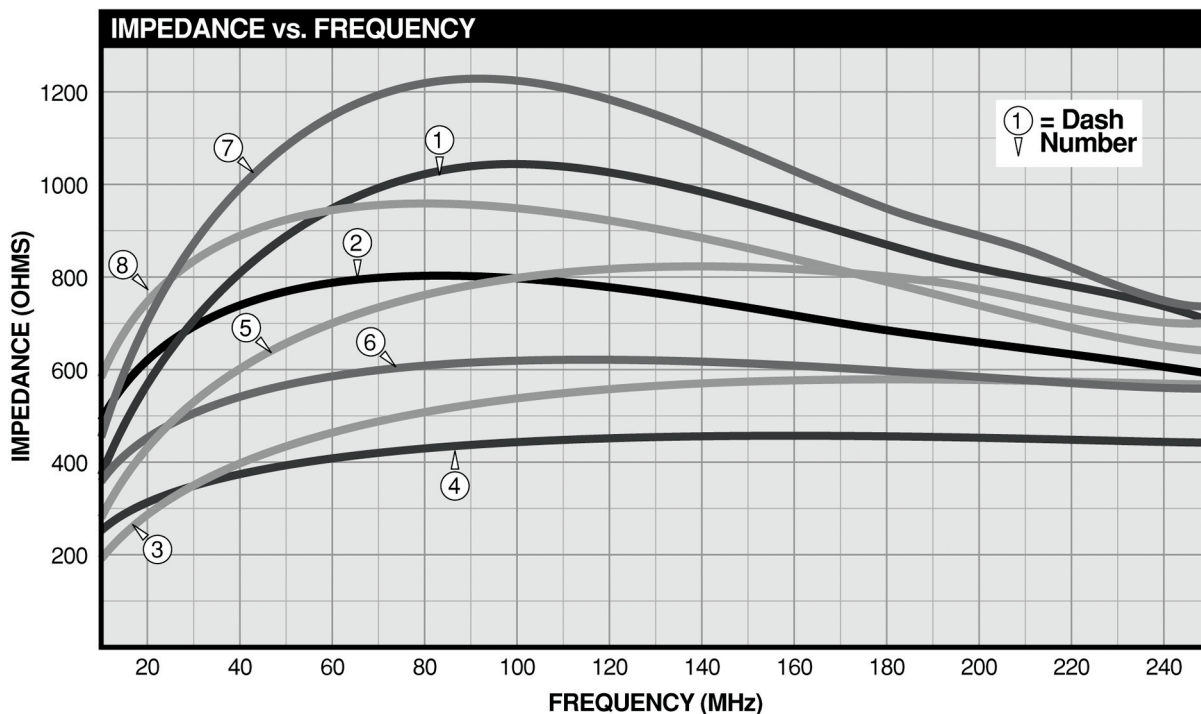

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com