


EPIC® Pin & Sleeve Connectors

20 Amp: North American Version
CEE Straight Female Panel Mount Receptacle

IP 44

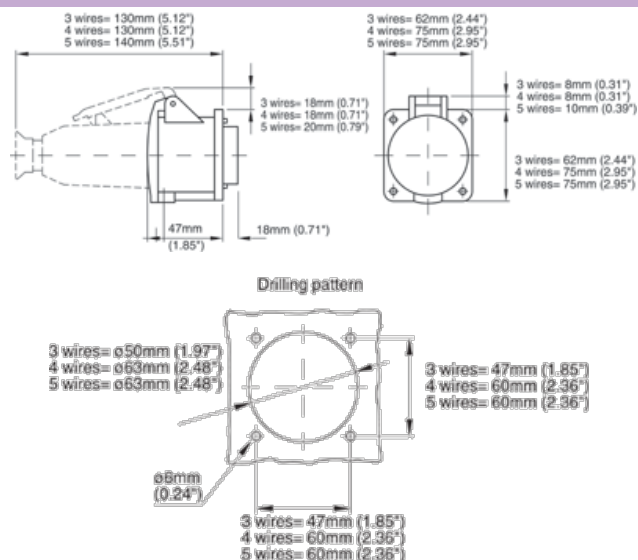

Technical Data

Impact Resistance:	8J
Ambient Temperature:	-25°C to 70°C
Flame Resistance:	
➤Glow Wire Test: Enclosure:	850°C
➤Glow Wire Test: Contact Enclosure:	850°C
➤Self-Extinguishing: Enclosure:	UL94-V2
➤Self-Extinguishing: Contact Carrier:	UL94-V2

Part Numbers

Part Number	Voltage	# of Wires	# of Poles	Ground-Clock Position
431611FX	125	3	1 + N + PE	4
431622FX	250	3	2 + PE	6
431650FX	480	3	2 + PE	7
441612FX	125 / 250	4	2 + N + PE	12
441622FX	3Ø250	4	3 + PE	9
441650FX	3Ø480	4	3 + PE	7
451622FX	3ØY 120 / 208	5	3 + N + PE	9
451650FX	3ØY 277 / 480	5	3 + N + PE	7