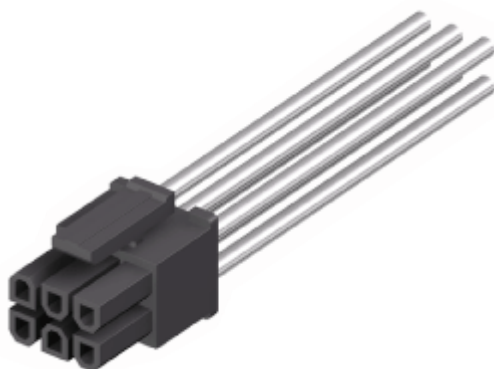


Order code: 433-2-010-X-KS0


6) WIRE TO BOARD

Series: **433**


Pitch (mm)	3,00
Mating pin size (range)	sq. 0,64, U 0,68
Cable termination	Crimp
No of contacts	2, 4, 6, 8, 10, ... 24
Polarising	Yes
Locking	Positive lock
Material insulator	Thermoplast UL94V-0
Rated current	5,0 A
Rated voltage	250 V _{RMS} / V _{DC}
Withstand voltage	1500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Packaging	Standard

Polarized crimp housings 3,00 mm pitch and locking feature. Compatible with industries standard.


Double row version.

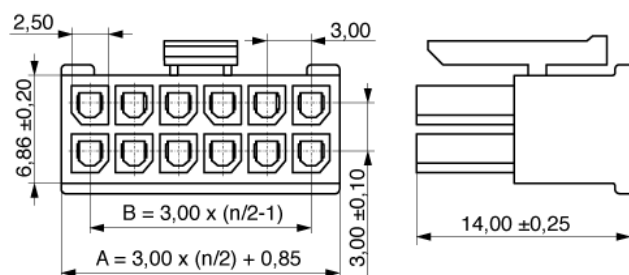


2Pin




10Pin




18Pin



4Pin




12Pin

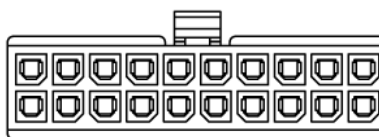


20Pin




6Pin




14Pin

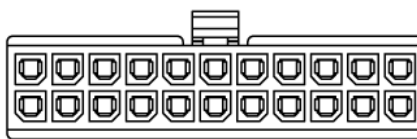


22Pin



8Pin



16Pin

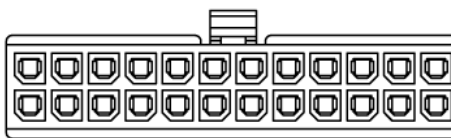

24Pin

Order code: 433-2-010-X-KS0

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 13.03.2017 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=433-2-010-X-KS0