


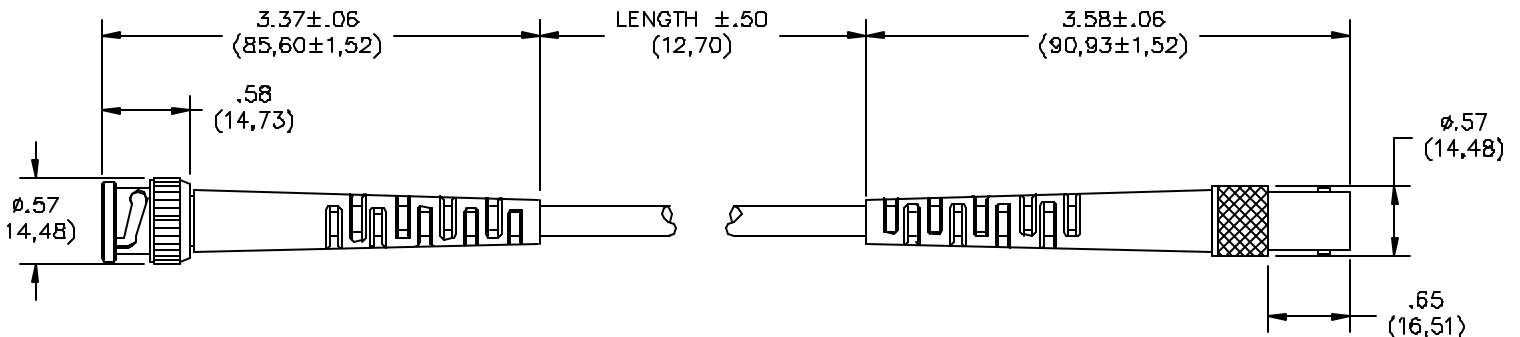

FEATURES:

- Attach to BNC (Male or Female) cables to quickly extend at cable lengths.
- BNC Connectors feature tarnish resistant bodies and PTFE dielectrics for optimum performance.
- BNC (Male) center contact is gold plated and the BNC (Female) is gold plated Beryllium Copper for reliable electrical connection.
- Strain Reliefs are molded to the connectors and cable to ensure long cable life.

MATERIALS:

BNC Connectors:

Body: Brass, Nickel Plated

Center Contacts: Brass, Gold Plated (Male) Beryllium Copper, Gold Plated (Female)

Dielectric: PTFE

Impedance: 50 Ohm

Strain Relief: PVC Molded to Cable, Color: Black

Marking: "Pomona 4524-C-XX"

Cable: RG58C/U, Impedance: 50 Ohms Nominal, O.D., .195" (5,0 mm), Color: Black,

Capacitance: 30.8 pF/Ft., Marking: "POMONA", "4524-C-XX"

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: 50°C (+122°F) Max.

ORDERING INFORMATION: Model 4524-C-XX XX = Cable length

Std. Lengths: 12" (30,5 cm), 24" (61 cm), 36" (91,44cm), 48" (121,92cm), 60" (152,4cm).

Additional lengths can be quoted upon requested.

Ordering Ex.: 4524-C-60 is a cable with a length of 60" (152,4 cm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[4524-C-24](#) [4524-C-12](#)