

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0464371084**
Status: **Active**
Overview: EXTreme Ten60Power™ High-Current Connector
Description: 2.54mm, 5.50mm, 7.50mm Pitch EXTreme Ten60Power Right Angle Plug Assembly with Guide Pins, 24 Signal Circuits, 4 DC Power Circuits, 3 AC Power Circuits

Documents:

[3D Model](#) [Application Specification AS-46436-100-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-46436-100-001 \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [46437](#)
 Application Board-to-Board, Power, Signal
 Comments See PS-46436-100 for details
 Overview [EXTreme Ten60Power™ High-Current Connector](#)
 Product Name EXTreme Ten60Power
 UPC 884982045415

Physical

(p)ower-(s)ignal Configuration 3p - 4p - 24s
 Breakaway No
 Circuits (Loaded) 31
 Circuits (maximum) 31
 Color - Resin Black
 Durability (mating cycles max) 200
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part Yes
 Keying to Mating Part None
 Lock to Mating Part No
 Mated Height 18.00mm
 Material - Metal Copper
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 40.000/g
 Number of Rows 1, 3
 Orientation Right Angle
 PC Tail Length 2.84mm
 PCB Locator Yes
 PCB Retention None
 PCB Thickness - Recommended 1.58mm
 Packaging Type Tray
 Pitch - Mating Interface 2.54mm, 5.50mm, 7.50mm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded No
 Stackable No
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating -40°C to +105°C

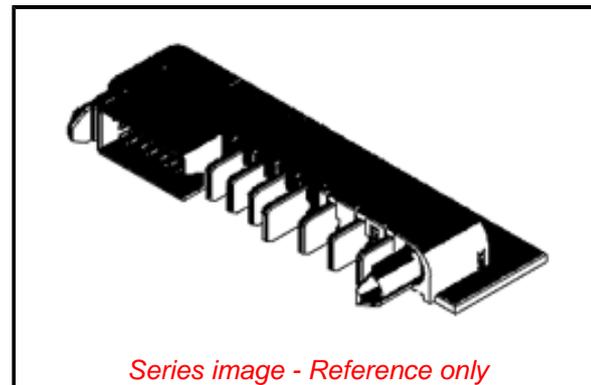

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/30/2017 (7 July
 2017)

Halogen-Free

Status

Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS Green Image
 ELV Not Relevant
 RoHS Phthalates Not Contained

Search Parts in this Series

[46437](#) Series

Mates With

[46562-1084](#) EXTreme Ten60Power
 Receptacle

Termination Interface: Style

Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact

2.5A, 60.0A

Voltage - Maximum

600V AC / 250V DC

Material Info

Reference - Drawing Numbers

Application Specification

AS-46436-100-001

Product Specification

PS-46436-100-001

Sales Drawing

SD-46437-1084

This document was generated on 11/17/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[46437-1084](#)