

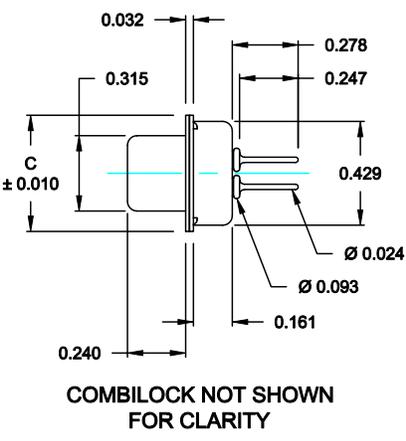


DESCRIPTION: DIP SOLDER FILTERED COMBILOCK D-SUB

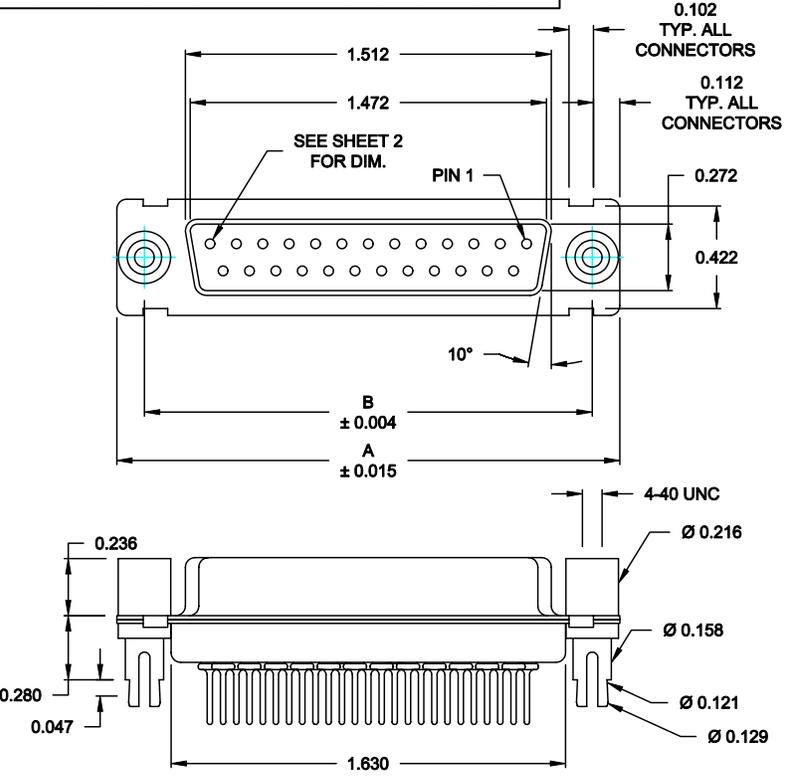

DIMENSIONS (IN.)			
No. OF PINS	A	B	C
9	1.204	0.984	0.480
15	1.535	1.312	0.480
25	2.078	1.850	0.480
37	2.724	2.500	0.480
50	2.622	2.405	0.598

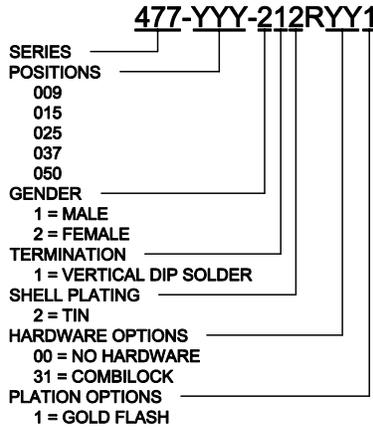

SPECIFICATIONS:

MATERIALS:
 SHELL: STEEL, TIN PLATED
 INSULATOR: UL 94V-0 RATED PBTP
 GLASS-FIBER REINFORCED






ELECTRICALS:
 INDIVIDUAL CAPACITOR VALUE = 1000 pF
 OTHER VALUES AVAILABLE: CONSULT FACTORY
 CURRENT RATING: 5 AMPS
 CONTACT RESISTANCE: <10 mOHMS
 INSULATOR RESISTANCE: 1000 OHMS
 VOLTAGE: 1 KV / AC
 TEMPERATURE: -55°C TO +125°C

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 10-02-06
			CHECKED: X	DATE: X
	NorComp		SCALE: N.T.S.	SHEET 1 OF 2

DWG NO. **477-YYY-212RYY1**

DESCRIPTION: DIP SOLDER FILTERED PCB LAYOUT

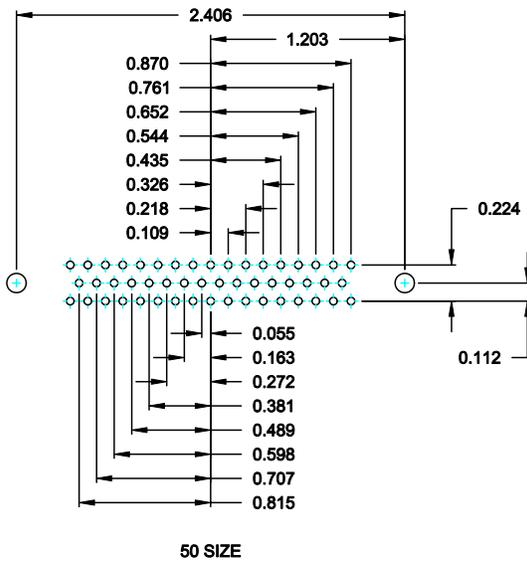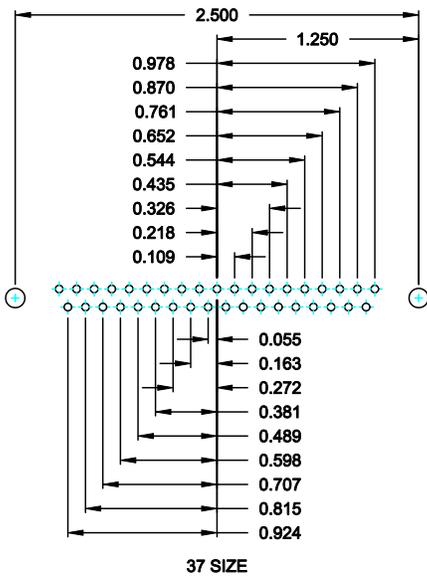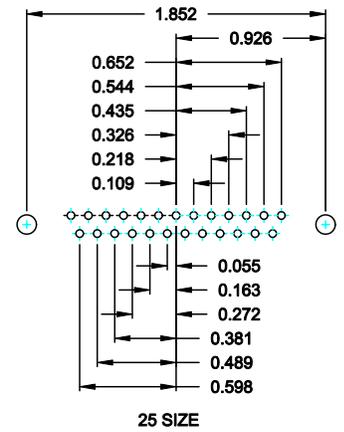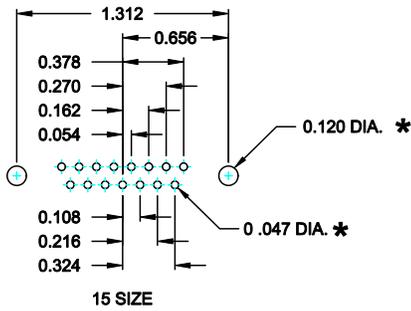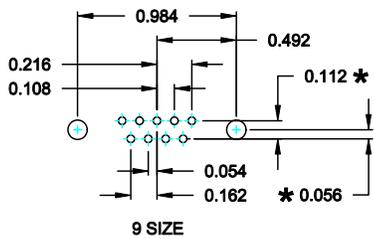

*** TYP. ON ALL PATTERNS**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 10-03-06
			CHECKED: X	DATE: X
<h1>NorComp</h1>		SCALE: FULL	SHEET 2 OF 2	REV 1
		DWG NO. 477-YYY-212RYY1		