Kabeltülle PG12, Socket, solder terminal, screened, 7.5 mm, 4-pole, straight, UK-Connector







Description

- Solder terminal :
- Screw-on mounting , from rear-side
- Data and Signal transfer
- Data and Signal Connectors 4-pole , shielded , straight


Technical Data

Diameter	7.5 mm
Number of Poles	4-pole
Ratings DC	2A / 12VDC
Ratings AC	2A / 12VAC
Dielectric Strength	1000 VDC
Insulation Resistance	> 10000 MΩ @ 500 VDC


-20°C to 70°C
solder terminal
Screw-on mounting
wall thickness max. 3.5 mm
screened
straight
10000 Insertions

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in General Product Information

Dimensions

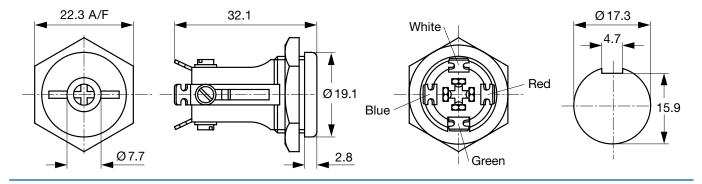

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number	_
Data and Signal Plug/ Sockets	7.5	4-pole	solder terminal	4804.2400	

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

100 Pcs Packaging unit

Mating Inlets/Plugs

Category / Description



Data and Signal Plug/Socket Overview complete

Kabeltülle PG12, Plug, solder terminal, insulated, 7.5 mm, 4-pole, straight, UK-Connector	4804.1400
Kabeltülle PG12, Plug, solder terminal, insulated, 7.5 mm, 4-pole, straight, UK-Connector	4804.1401

Data and Signal Plug/Socket further types to 4804.2400