

4833, solder terminal, insulated, 3-pole, Audio Plug/Sockets, 6.3 mm



Description


- Solder terminal :
for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 3-pole , insulated , straight

Technical Data


Diameter	6.3 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	3-pole	Terminal	solder terminal nickel-plated
Ratings DC	1 A / 30 VDC	Housings	insulated
Ratings AC	1 A / 30 VAC	Style	straight
Dielectric Strength	500 VDC	Lifetime	5000 Insertions
Insulation Resistance	> 50 MΩ @ 500 VDC		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)


Dimensions



Cable diameter max. 6.3 mm

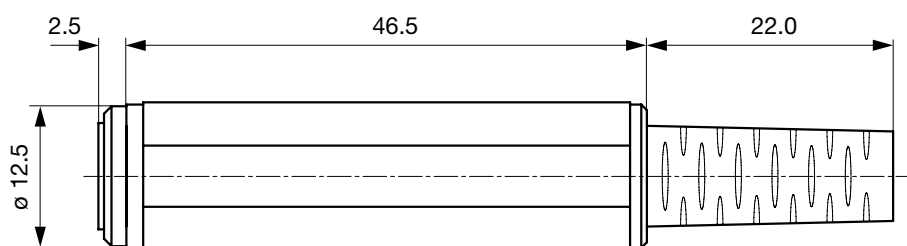

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	6.3	3-pole	solder terminal	4833.3300

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit	500 Pcs
----------------	---------

Mating Inlets/Plugs

Category / Description

[Audio Plug/Sockets Overview complete](#)



4833, solder terminal, screened, 3-pole, Audio Plug/Sockets, 6.3 mm	4833.1300
4833, solder terminal, insulated, 3-pole, Audio Plug/Sockets, 6.3 mm	4833.1310
4833, solder terminal, insulated, 3-pole, Audio Plug/Sockets, 6.3 mm	4833.1320

[Audio Plug/Sockets further types to 4833.3300](#)