


Datasheet

5way vertical low profile screw terminal

RS Stock number 494-8984

Drawing (mm):

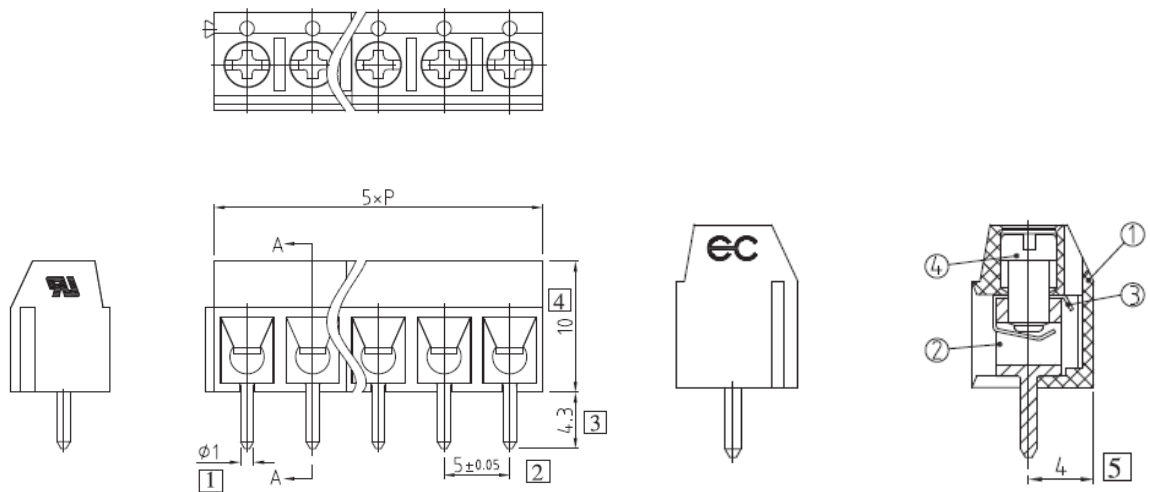

Specifications:

Ratling: 300V 16A (UL)

Insulation Withstands Voltage: AC2000V/MIN

Insulation Resistance: >500MΩ or more at DC500V

Using Temperature Range: -40°C/ +105°C

Screw Torque Value: 0.4Nm

Suitable Electric Wire: 14-20AWG

RoHS compliance