
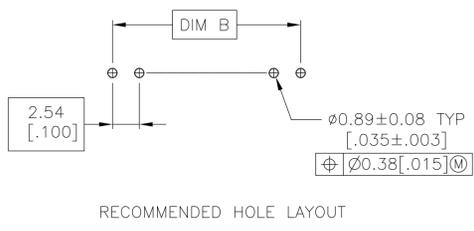
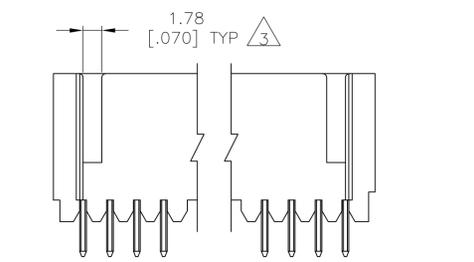
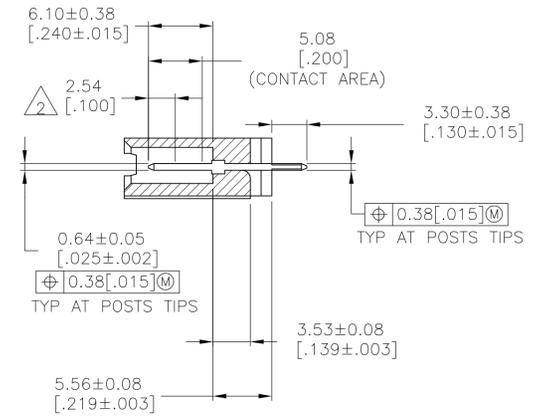
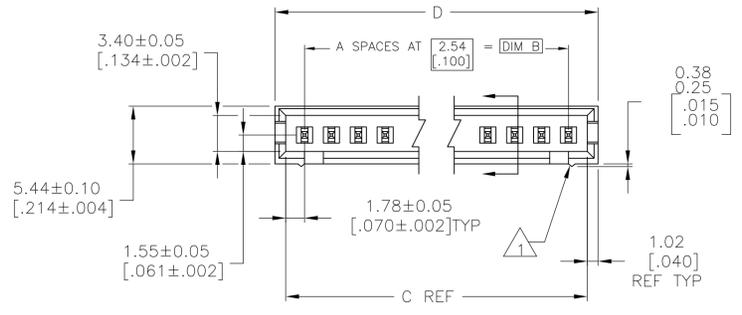


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD		
P2		REVISED PER ECO-11-004587	11MAR11	RK	HMR		

- 1 STANDOFFS: UP TO 9 POS-(2 REQD) ON THE OUTSIDE ENDS OF THE HOUSING  
10 TO 19 POS-(3 REQD) TWO ON THE OUTSIDE ENDS AND ONE CENTERED ON THE HOUSING  
19 POS AND LARGER-(4 REQD) TWO ON THE OUTSIDE ENDS AND TWO SPACED EVENLY WITHIN THE REMAINING LENGTH OF THE HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 FOR 3 POS (3--4 ONLY) ONE SLOT, 5.46[.215] WIDE.
- 4 RECESSED DATE CODE
- 5 HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR - BLACK.  
POSTS: BRASS.
- 6 0.00038[.000015] GOLD ON THE CONTACT AREA, 0.00254[.000100]-0.00508[.000200] MATTE TIN-LEAD ON THE SOLDER TAIL ALL OVER 0.00127[.000050] NICKEL.
- 7 0.00038[.000015] GOLD ON THE CONTACT AREA, 0.00254[.000100]-0.00508[.000200] MATTE TIN ON THE SOLDER TAIL ALL OVER 0.00127[.000050] NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

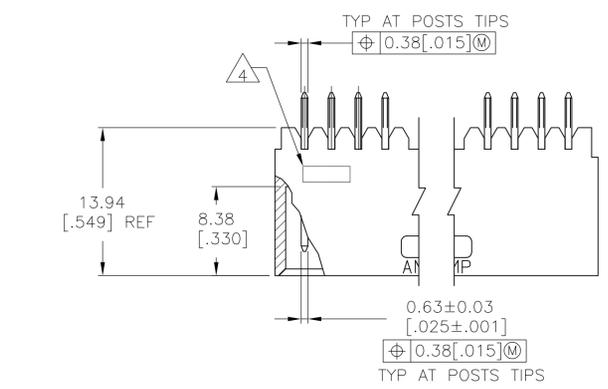

3	2	1	2	3	8-102202-4				
OB	66.55	[2.620]	64.52	[2.540]	60.96	[2.400]	24	25	7-102202-2
OB	64.01	[2.520]	61.98	[2.440]	58.42	[2.300]	23	24	7-102202-1
OB	61.47	[2.420]	59.44	[2.340]	55.88	[2.200]	22	23	7-102202-0
OB	58.93	[2.320]	56.90	[2.240]	53.34	[2.100]	21	22	6-102202-9
OB	56.39	[2.220]	54.36	[2.140]	50.80	[2.000]	20	21	6-102202-8
OB	53.85	[2.120]	51.82	[2.040]	48.26	[1.900]	19	20	6-102202-7
OB	51.31	[2.020]	49.28	[1.940]	45.72	[1.800]	18	19	6-102202-6
	48.77	[1.920]	46.74	[1.840]	43.18	[1.700]	17	18	6-102202-5
	46.23	[1.820]	44.20	[1.740]	40.64	[1.600]	16	17	6-102202-4
	43.69	[1.720]	41.66	[1.640]	38.10	[1.500]	15	16	6-102202-3
	41.15	[1.620]	39.12	[1.540]	35.56	[1.400]	14	15	6-102202-2
	38.61	[1.520]	36.58	[1.440]	33.02	[1.300]	13	14	6-102202-1
	36.07	[1.420]	34.04	[1.340]	30.48	[1.200]	12	13	6-102202-0
	33.53	[1.320]	31.50	[1.240]	27.94	[1.100]	11	12	5-102202-9
	30.99	[1.220]	28.96	[1.140]	25.40	[1.000]	10	11	5-102202-8
	28.45	[1.120]	26.42	[1.040]	22.86	[.900]	9	10	5-102202-7
	25.91	[1.020]	23.88	[.940]	20.32	[.800]	8	9	5-102202-6
	23.37	[.920]	21.34	[.840]	17.78	[.700]	7	8	5-102202-5
	20.83	[.820]	18.80	[.740]	15.24	[.600]	6	7	5-102202-4
	18.29	[.720]	16.26	[.640]	12.70	[.500]	5	6	5-102202-3
	15.75	[.620]	13.72	[.540]	10.16	[.400]	4	5	5-102202-2
	13.21	[.520]	11.18	[.440]	7.62	[.300]	3	4	5-102202-1
3	10.67	[.420]	8.64	[.340]	5.08	[.200]	2	3	3-102202-4
OB	94.49	[3.720]	92.46	[3.640]	88.90	[3.500]	35	36	3-102202-3
OB	91.95	[3.620]	89.92	[3.540]	86.36	[3.400]	34	35	3-102202-2
OB	89.41	[3.520]	87.38	[3.440]	83.82	[3.300]	33	34	3-102202-1
OB	86.87	[3.420]	84.84	[3.340]	81.28	[3.200]	32	33	3-102202-0
OB	84.33	[3.320]	82.30	[3.240]	78.74	[3.100]	31	32	2-102202-9
OB	81.79	[3.220]	79.76	[3.140]	76.20	[3.000]	30	31	2-102202-8
OB	79.25	[3.120]	77.22	[3.040]	73.66	[2.900]	29	30	2-102202-7
OB	76.71	[3.020]	74.68	[2.940]	71.12	[2.800]	28	29	2-102202-6
OB	74.17	[2.920]	72.14	[2.840]	68.58	[2.700]	27	28	2-102202-5
OB	71.63	[2.820]	69.60	[2.740]	66.04	[2.600]	26	27	2-102202-4
OB	69.09	[2.720]	67.06	[2.640]	63.50	[2.500]	25	26	2-102202-3
OB	66.55	[2.620]	64.52	[2.540]	60.96	[2.400]	24	25	2-102202-2
OB	64.01	[2.520]	61.98	[2.440]	58.42	[2.300]	23	24	2-102202-1
OB	61.47	[2.420]	59.44	[2.340]	55.88	[2.200]	22	23	2-102202-0
OB	58.93	[2.320]	56.90	[2.240]	53.34	[2.100]	21	22	1-102202-9
OB	56.39	[2.220]	54.36	[2.140]	50.80	[2.000]	20	21	1-102202-8
OB	53.85	[2.120]	51.82	[2.040]	48.26	[1.900]	19	20	1-102202-7
OB	51.31	[2.020]	49.28	[1.940]	45.72	[1.800]	18	19	1-102202-6
OB	48.77	[1.920]	46.74	[1.840]	43.18	[1.700]	17	18	1-102202-5
OB	46.23	[1.820]	44.20	[1.740]	40.64	[1.600]	16	17	1-102202-4
OB	43.69	[1.720]	41.66	[1.640]	38.10	[1.500]	15	16	1-102202-3
OB	41.15	[1.620]	39.12	[1.540]	35.56	[1.400]	14	15	1-102202-2
OB	38.61	[1.520]	36.58	[1.440]	33.02	[1.300]	13	14	1-102202-1
OB	36.07	[1.420]	34.04	[1.340]	30.48	[1.200]	12	13	1-102202-0
OB	33.53	[1.320]	31.50	[1.240]	27.94	[1.100]	11	12	102202-9
OB	30.99	[1.220]	28.96	[1.140]	25.40	[1.000]	10	11	102202-8
OB	28.45	[1.120]	26.42	[1.040]	22.86	[.900]	9	10	102202-7
OB	25.91	[1.020]	23.88	[.940]	20.32	[.800]	8	9	102202-6
OB	23.37	[.920]	21.34	[.840]	17.78	[.700]	7	8	102202-5
OB	20.83	[.820]	18.80	[.740]	15.24	[.600]	6	7	102202-4
OB	18.29	[.720]	16.26	[.640]	12.70	[.500]	5	6	102202-3
OB	15.75	[.620]	13.72	[.540]	10.16	[.400]	4	5	102202-2
OB	13.21	[.520]	11.18	[.440]	7.62	[.300]	3	4	102202-1

OB SUPERSEDED BY 6-102202-4

PLATING	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN E. BRANDBERG 04NOV97		STE TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. SHUEY 04NOV97 NAME	
0 PLC ± -		1 PLC ± -		PRODUCT SPEC	
2 PLC ± -		3 PLC ± 0.38 [.015]		APPLICATION SPEC	
4 PLC ± -		ANGLES ± -		SIZE CASE CODE DRAWING NO	
MATERIAL		FINISH SEE TABLE		WEIGHT	
				A1 00779 C=102202	
				CUSTOMER DRAWING SCALE 3:1 SHEET 1 of 1 REV P2	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-102202-1](#)