


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 0.00254-0.00504 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- HOUSING: LCP, COLOR-BLACK. POSTS: COPPER ALLOY.
- 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

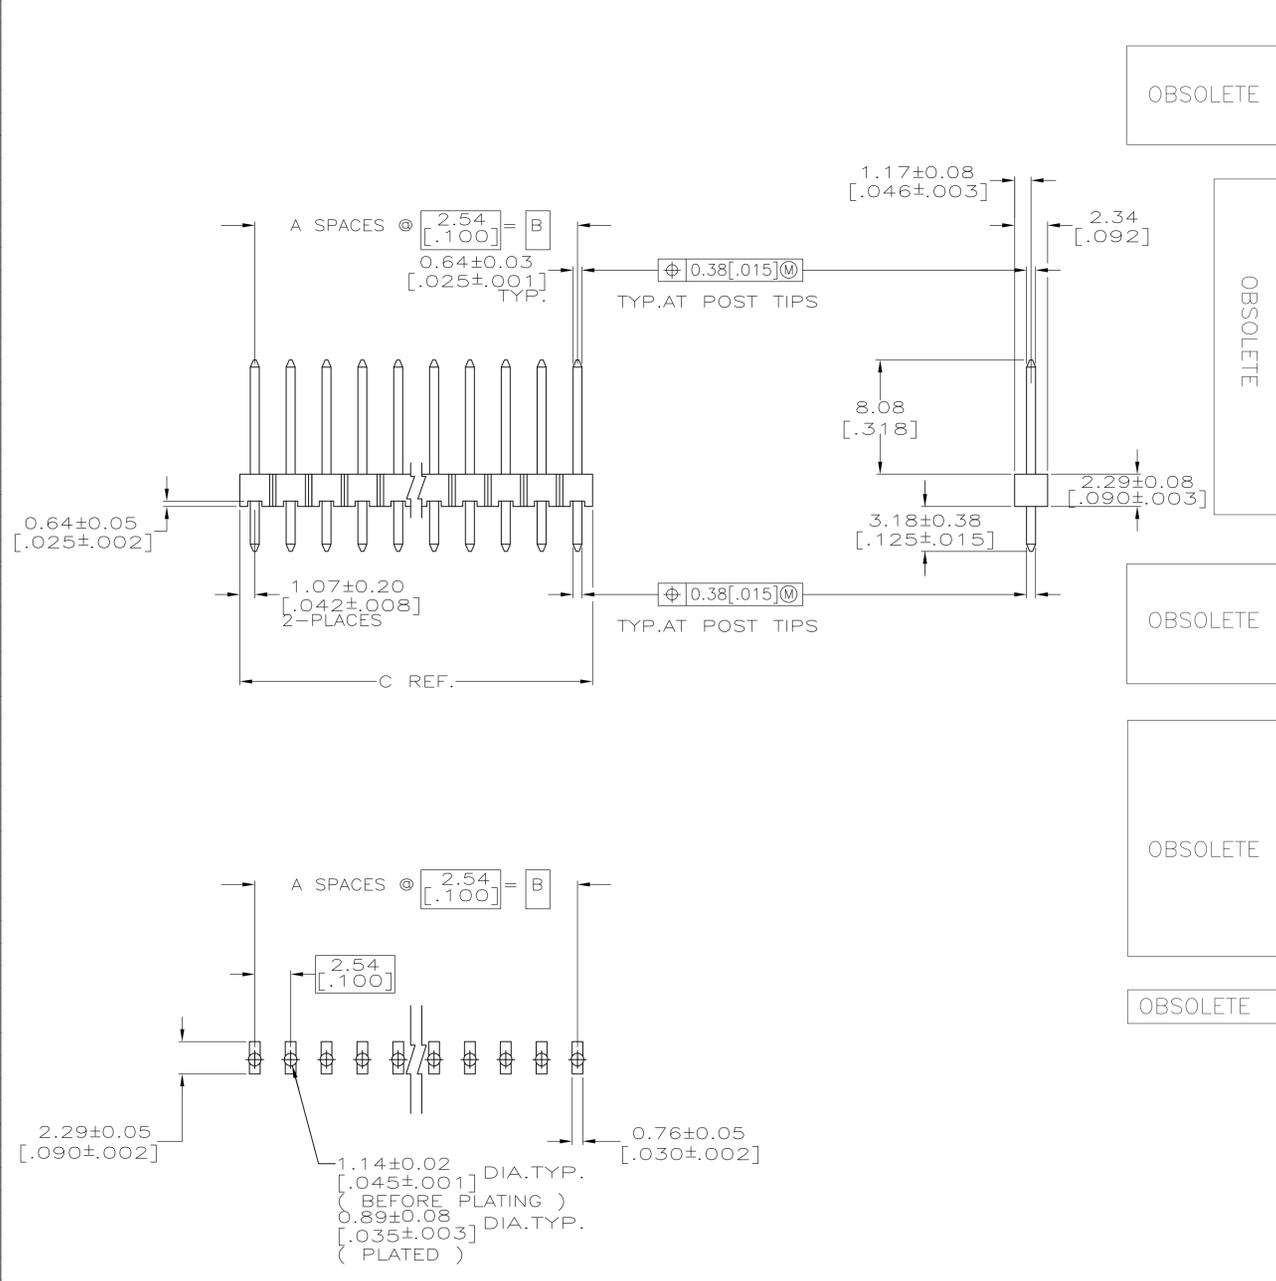

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
	101.19	99.06	39	40	9-146274-0
	3.984	3.900			
	98.65	96.52	38	39	8-146274-9
	3.884	3.800			
	96.11	93.98	37	38	8-146274-8
	3.784	3.700			
	93.57	91.44	36	37	8-146274-7
	3.684	3.600			
	91.03	88.90	35	36	8-146274-6
	3.584	3.500			
	88.49	86.36	34	35	8-146274-5
	3.484	3.400			
	85.95	83.82	33	34	8-146274-4
	3.384	3.300			
	83.41	81.28	32	33	8-146274-3
	3.284	3.200			
	80.87	78.74	31	32	8-146274-2
	3.184	3.100			
	78.33	76.20	30	31	8-146274-1
	3.084	3.000			
	75.79	73.66	29	30	8-146274-0
	2.984	2.900			
	73.25	71.12	28	29	7-146274-9
	2.884	2.800			
	70.71	68.58	27	28	7-146274-8
	2.784	2.700			
	68.17	66.04	26	27	7-146274-7
	2.684	2.600			
	65.63	63.5	25	26	7-146274-6
	2.584	2.500			
	63.09	60.96	24	25	7-146274-5
	2.484	2.400			
	60.55	58.42	23	24	7-146274-4
	2.384	2.300			
	58.01	55.88	22	23	7-146274-3
	2.284	2.200			
	55.47	53.34	21	22	7-146274-2
	2.184	2.100			
	52.93	50.80	20	21	7-146274-1
	2.084	2.000			
	50.39	48.26	19	20	7-146274-0
	1.984	1.900			
	47.85	45.72	18	19	6-146274-9
	1.884	1.800			
	45.31	43.18	17	18	6-146274-8
	1.784	1.700			
	42.77	40.64	16	17	6-146274-7
	1.684	1.600			
	40.23	38.10	15	16	6-146274-6
	1.584	1.500			
	37.69	35.56	14	15	6-146274-5
	1.484	1.400			
	35.15	33.02	13	14	6-146274-4
	1.384	1.300			
	32.61	30.48	12	13	6-146274-3
	1.284	1.200			
	30.07	27.94	11	12	6-146274-2
	1.184	1.100			
	27.53	25.40	10	11	6-146274-1
	1.084	1.000			
	24.99	22.86	9	10	6-146274-0
	.984	.900			
	22.45	20.32	8	9	5-146274-9
	.884	.800			
	19.91	17.78	7	8	5-146274-8
	.784	.700			
	17.37	15.24	6	7	5-146274-7
	.684	.600			
	14.83	12.70	5	6	5-146274-6
	.584	.500			
	12.29	10.16	4	5	5-146274-5
	.484	.400			
	9.75	7.62	3	4	5-146274-4
	.384	.300			
	7.21	5.08	2	3	5-146274-3
	.284	.200			
	4.67	2.54	1	2	5-146274-2
	.184	.100			
	2.13	-	0	1	5-146274-1
	.084	-			

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
	101.19	99.06	39	40	4-146274-0
	3.984	3.900			
	98.65	96.52	38	39	3-146274-9
	3.884	3.800			
	96.11	93.98	37	38	3-146274-8
	3.784	3.700			
	93.57	91.44	36	37	3-146274-7
	3.684	3.600			
	91.03	88.90	35	36	3-146274-6
	3.584	3.500			
	88.49	86.36	34	35	3-146274-5
	3.484	3.400			
	85.95	83.82	33	34	3-146274-4
	3.384	3.300			
	83.41	81.28	32	33	3-146274-3
	3.284	3.200			
	80.87	78.74	31	32	3-146274-2
	3.184	3.100			
	78.33	76.20	30	31	3-146274-1
	3.084	3.000			
	75.79	73.66	29	30	3-146274-0
	2.984	2.900			
	73.25	71.12	28	29	2-146274-9
	2.884	2.800			
	70.71	68.58	27	28	2-146274-8
	2.784	2.700			
	68.17	66.04	26	27	2-146274-7
	2.684	2.600			
	65.63	63.5	25	26	2-146274-6
	2.584	2.500			
	63.09	60.96	24	25	2-146274-5
	2.484	2.400			
	60.55	58.42	23	24	2-146274-4
	2.384	2.300			
	58.01	55.88	22	23	2-146274-3
	2.284	2.200			
	55.47	53.34	21	22	2-146274-2
	2.184	2.100			
	52.93	50.80	20	21	2-146274-1
	2.084	2.000			
	50.39	48.26	19	20	2-146274-0
	1.984	1.900			
	47.85	45.72	18	19	1-146274-9
	1.884	1.800			
	45.31	43.18	17	18	1-146274-8
	1.784	1.700			
	42.77	40.64	16	17	1-146274-7
	1.684	1.600			
	40.23	38.10	15	16	1-146274-6
	1.584	1.500			
	37.69	35.56	14	15	1-146274-5
	1.484	1.400			
	35.15	33.02	13	14	1-146274-4
	1.384	1.300			
	32.61	30.48	12	13	1-146274-3
	1.284	1.200			
	30.07	27.94	11	12	1-146274-2
	1.184	1.100			
	27.53	25.40	10	11	1-146274-1
	1.084	1.000			
	24.99	22.86	9	10	1-146274-0
	.984	.900			
	22.45	20.32	8	9	146274-9
	.884	.800			
	19.91	17.78	7	8	146274-8
	.784	.700			
	17.37	15.24	6	7	146274-7
	.684	.600			
	14.83	12.70	5	6	146274-6
	.584	.500			
	12.29	10.16	4	5	146274-5
	.484	.400			
	9.75	7.62	3	4	146274-4
	.384	.300			
	7.21	5.08	2	3	146274-3
	.284	.200			
	4.67	2.54	1	2	146274-2
	.184	.100			
	2.13	-	0	1	146274-1
	.084	-			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN I. HOFFMAN 6/12/95	APPROVED: G. DUBNICZKI 6/29/95
0 PLC ± -	1 PLC ± .05	2 PLC ± .05 [1.02]	3 PLC ± .012 [1.005]
4 PLC ± .0127 [1.0005]	ANGLES ±	APPLICATION SPEC	PRODUCT SPEC
MATERIAL: 4	FINISH: SEE TABLE	WEIGHT: -	SIZE: A1
CUSTOMER DRAWING		SCALE: 4:1	SHEET 1 OF 1

STE TE Connectivity

HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL

DRAWING NO: 00779-146274

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146274-2](#)