





**DO NOT SCALE**  
DIMENSIONS IN mm

**METRIC**



**NOTES:**

- 1. CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1,27 CENTERS . FOR CABLE REQUIREMENTS SEE AMP APPLICATION SPECIFICATION 114-19008.
- 2. THESE RECEPTACLE CONNECTORS MATE WITH 0,64 <sup>#0,05</sup> mm SQUARE OR ROUND POSTS ON 2,54mm GRID.
- 3. MARK INDICATING FIRST CABLE POSITION REFERRING TO CONTACT POSITION.
- 4. THERE IS NO POLARIZATION-SLOT AT THIS END IN 4, 6, 8, 10 AND 14 POS CONNECTORS.
- 5. THESE CONNECTORS CAN BE USED IN CONJUNCTION WITH STRAIN-RELIEF COVERS OF PARTNR: 100103.
- 6. THERE IS NO POLARIZATION-SLOT AT THIS END IN 4, 6, AND 8 POS CONNECTORS.
- 7. PRODUCT SPECIFICATION 108-19033.

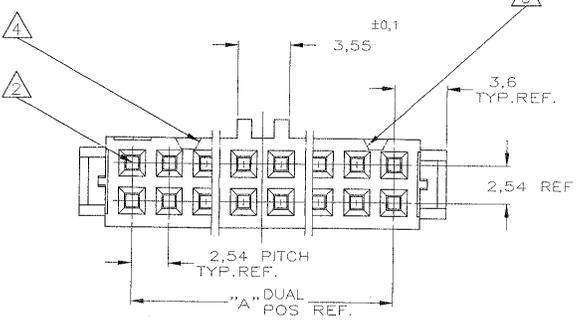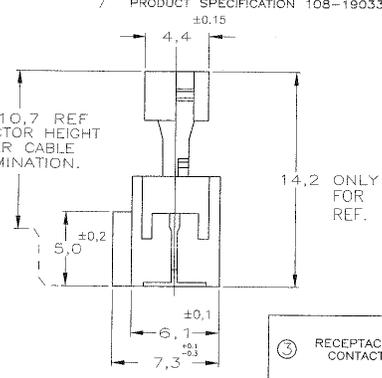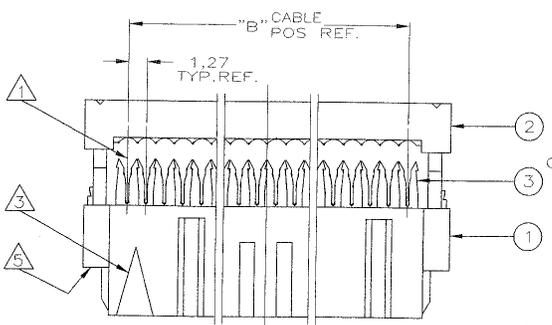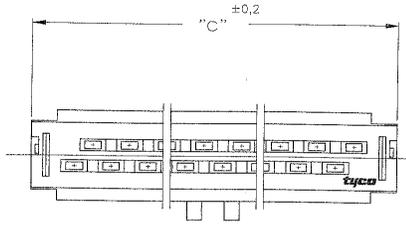

DIM. "C"	# OF CABLE POS.	DUAL POS.	PARTNUMBER
85,9	64	32	6-215882-4
80,8	60	30	6-215882-0
68,1	50	25	5-215882-0
60,5	44	22	4-215882-4
55,4	40	20	4-215882-0
47,8	34	17	3-215882-4
42,7	30	15	3-215882-0
37,6	26	13	2-215882-6
30,0	20	10	2-215882-0
24,9	16	8	1-215882-6
22,4	14	7	1-215882-4
17,3	10	5	1-215882-0
14,8	8	4	0-215882-8
12,2	6	3	0-215882-6
9,7	4	2	0-215882-4

3 RECEPTACLE CONTACT	PHOSPHORBRONZE Cu Sn4	AT CONTACT-PLACE: 0,8] GOLD AT WIRING END: 2,5] TIN ENTIRE UNDERCOATING: 1,27] NICKEL
2 COVER	THERMOPLASTIC POLYESTER GF UL 94 -V0	GREY RAL 7032 (ONLY FOR REF.)
1 HOUSING		

COMPONENT NAME	MATERIAL	PLATING / COLOUR
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
E1 ET00-0093-03	SS	- 23-05-03
E H-9454	JvdH	R.V. 10-01-82
LTR	REVISION RECORD	DR: CHK: DATE
DR.: W.R.VERBEE	CHK.: R.VERSTUNEN	APP.: L.V.SOEST
DATE: 02-02-88	DATE: 03-02-88	DATE: 03-02-88
DWG.No.	SIZE	SHEET
C-215882	A3	1 of 1
REV.LTR.		E1

R6-128 (REV.04-91) 8 7 6 5 4 3 2 1