

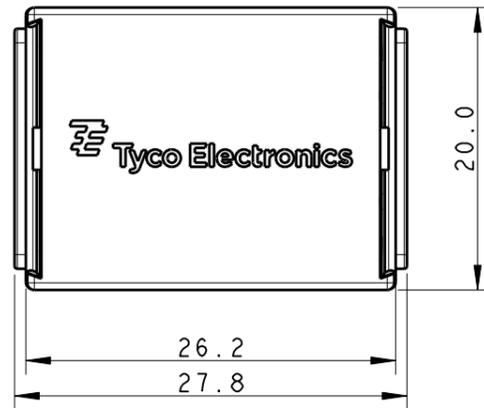
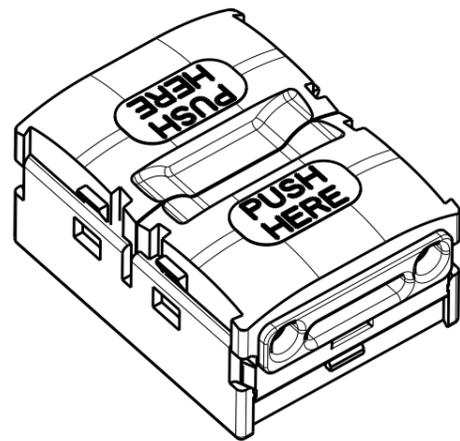
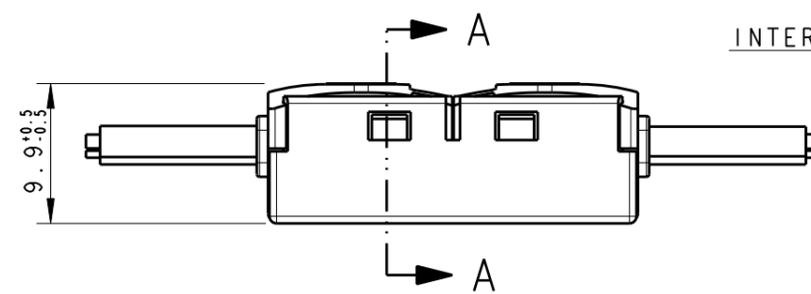




LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
-	-	A	REVISED PER ECR-10-014988	27JUL2010	HMR	PP	

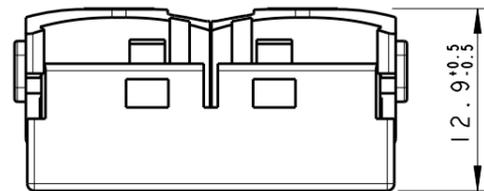

APPLICATION (FULLY LOADED : ALL WIRES CRIMPED)

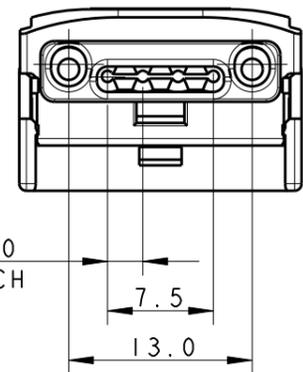


GEL FILLED INTERNAL VOLUME





SECTION A - A

P/N X-293521-Y

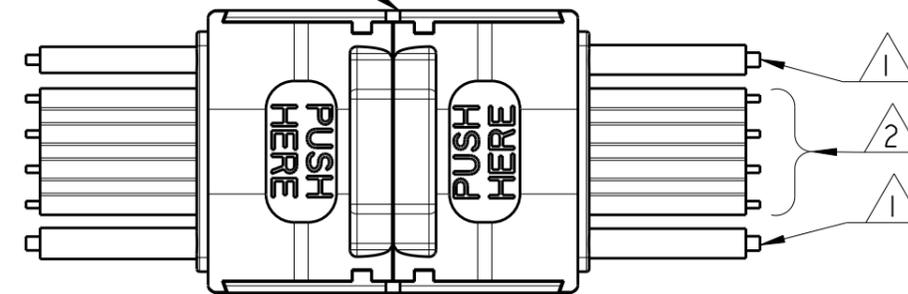

PARTIAL TERMINATION (ONE SIDE)

COMPLETE TERMINATION (BOTH SIDES)

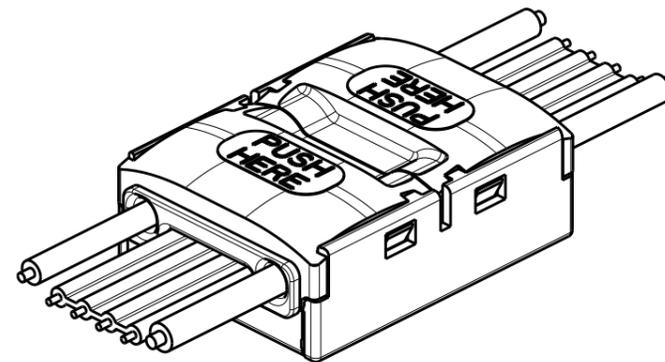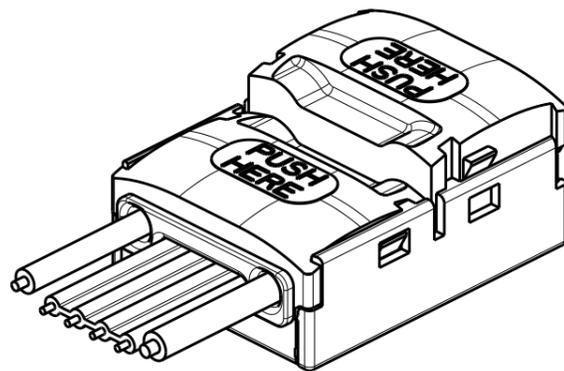

5-293521-1	TRANSPARENT
293521-1	TRANSPARENT
PART NUMBER	COLOR

1 SINGLE CABLE (SOLID TINNED WIRE);
 20AWG, 18AWG, 0.50mm², 0.75mm²
 INSULATION DIAMETER: 2.20mm MAX;
 INSULATION MATERIAL: PVC.

2 RIBBON CABLE, 4 WIRES
 PITCH 2.50±0.10mm, MAX WIDTH: 8.7mm
 AWG26/7 (FUSED TINNED STRANDS) OR
 AWG24/7 (FUSED AND NON FUSED TINNED STRANDS);
 INSULATION MATERIAL: PVC.

3 CONNECTOR TERMINATIONS ACHIEVED BY ALLIGATOR PLIERS.
 APPLICATION ACCORDING TO APPLICATION SPEC 114-19131

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
 IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
 SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.5
	1 PLC ±0.3
	2 PLC ±0.1
	3 PLC ±
	4 PLC ±
	ANGLES ±1
MATERIAL PC UNFILLED TRANSPARENT COLOURS ACC. TO UL94-V0 (3mm)	FINISH -

DWN	29APR2009
CHK	Erik Derks
CHK	29APR2009
CHK	Erik Derks
APVD	22jun09
APVD	Giovanni Turco
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

		Tyco Electronics AMP Italia S.r.l. C.so F.lli Cervi, 15 - Collegno (TO)	
NAME 4 POS. SEALED CONNECTOR FOR LED LIGHTING APPLICATION STANDARD VERSION			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-293521	-
SCALE 2:1		SHEET 1	OF 1
		REV	A