

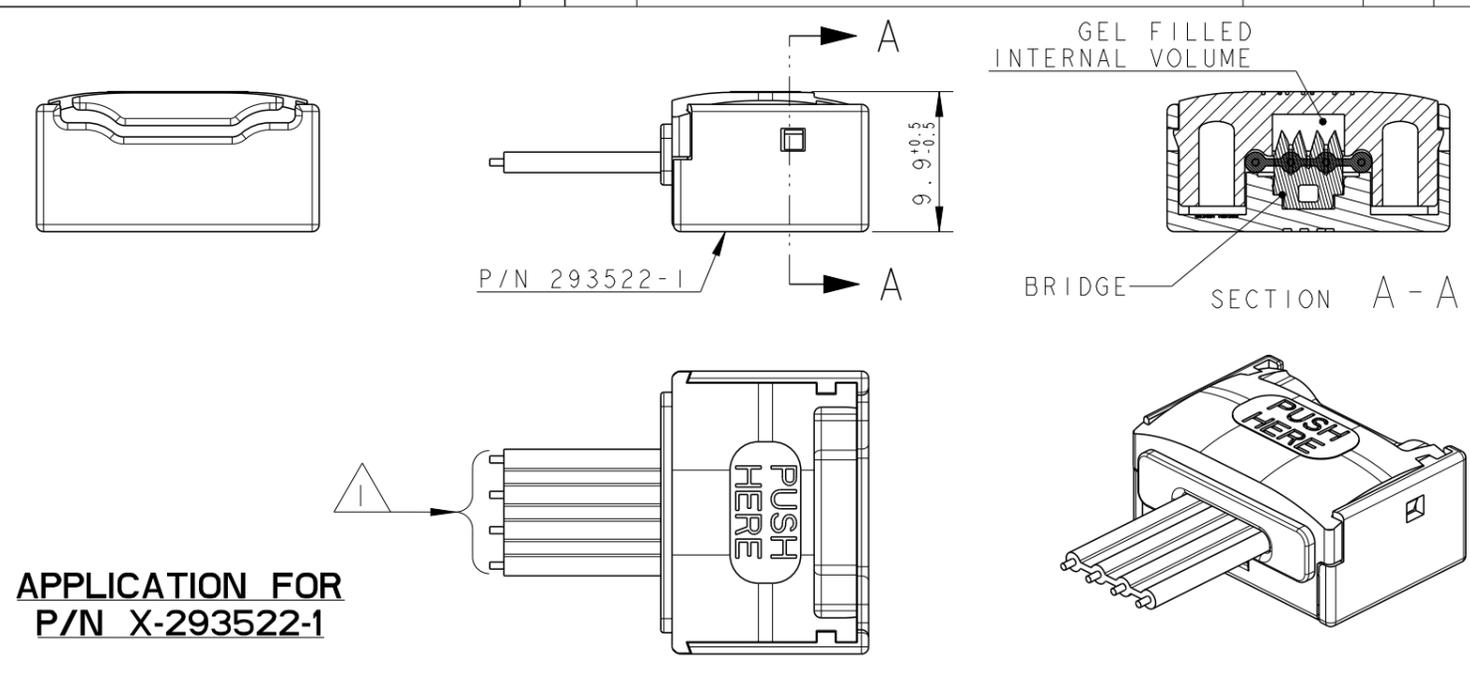

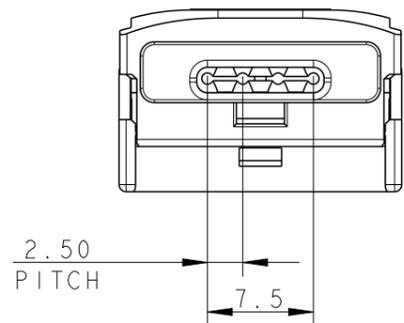
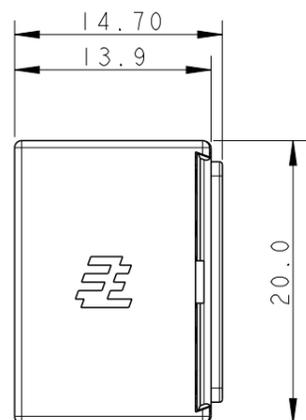


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	A	REVISED PER ECR-10-014988	27JUL2010	HMR	PP
		B	REVISED PER ECR-15-011380	25SEP2015	RS	DD
		C	REVISED PER ECR-16-008446	10JUN2016	RS	PO

PART NUMBER	BRIDGE	COLOR
5-293522-1	YES	TRANSP LIGHT BLUE
5-293522-2	NO	TRANSP LIGHT GREEN

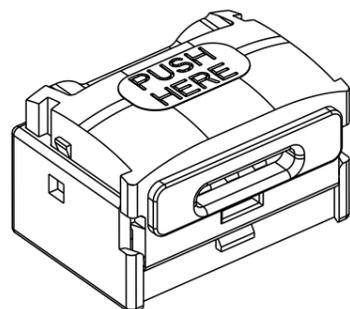

**APPLICATION FOR  
P/N X-293522-1**

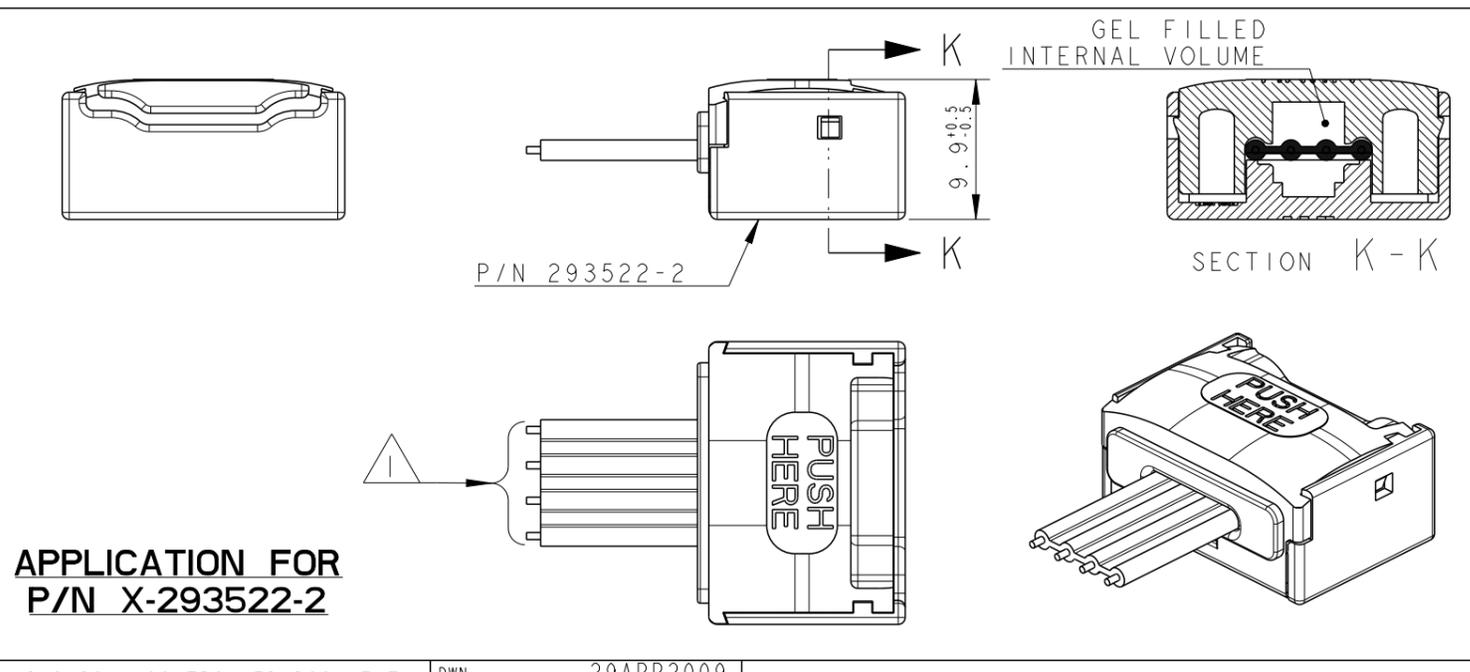

**APPLICATION FOR  
P/N X-293522-2**

- 1 RIBBON CABLE, 4 WIRES  
PITCH 2.50±0.10mm, MAX WIDTH: 8.7mm  
AWG26/7 (FUSED TINNED STRANDS)  
OR AWG24/7 (FUSED AND NON FUSED TINNED STRANDS);  
INSULATION MATERIAL: PVC.
- 2 CONNECTOR TERMINATIONS ACHIEVED BY ALLIGATOR PLIERS.  
SEE TE APPLICATION SPEC 114-19131

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 29APR2009 Erik Derks	TE Connectivity	
		CHK 29APR2009 Erik Derks		
		APVD 22jun09 GTU	NAME 4 POS. SEALED CONNECTOR FOR LED LIGHTING APPLICATION	
DIMENSIONS: mm		PRODUCT SPEC 108-19388		SIZE A300779
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-19131		CAGE CODE C-293522
MATERIAL PC UNFILLED TRANSPARENT COLOURS ACC. TO UL94-V0 (3mm)		WEIGHT -		RESTRICTED TO -
CUSTOMER DRAWING		SCALE 2:1		SHEET 1 OF 1 REV C

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-293522-1](#)