

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		U	REVISED PER ECO-15-007385	20MAY2015	GG	LS

1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.

2 MATERIAL: HOUSING- POLYCARBONATE, BLUE
TERMINAL- .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178 μ m [.000007] THICK GOLD IN LOCALIZED PLATE AREA OVER .762 μ m [.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54 μ m [.000100] THICK NICKEL ON ENTIRE CONTACT.
SHIELD- COPPER ALLOY WITH 1.27 μ m [.000050] MINIMUM SEMI-BRIGHT (SATIN) NICKEL.

3. PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.89-0.99[.035-.039] AND A MAXIMUM OVAL CABLE JACKET OF 2.54 X 8.89[.100 X .350].

4 TERMINATED DIMENSION 6.15[.242] MAXIMUM.


6 10,000 ASSEMBLIES PER PACKAGE.

7 500 ASSEMBLIES PER PACKAGE.

8 100 ASSEMBLIES PER PACKAGE.

10 REELED PRODUCT ON STRIP DOES NOT HAVE VOID CORING ILLUSTRATED ON THIS DRAWING.

11 100 ASSEMBLIES PER CARTON.

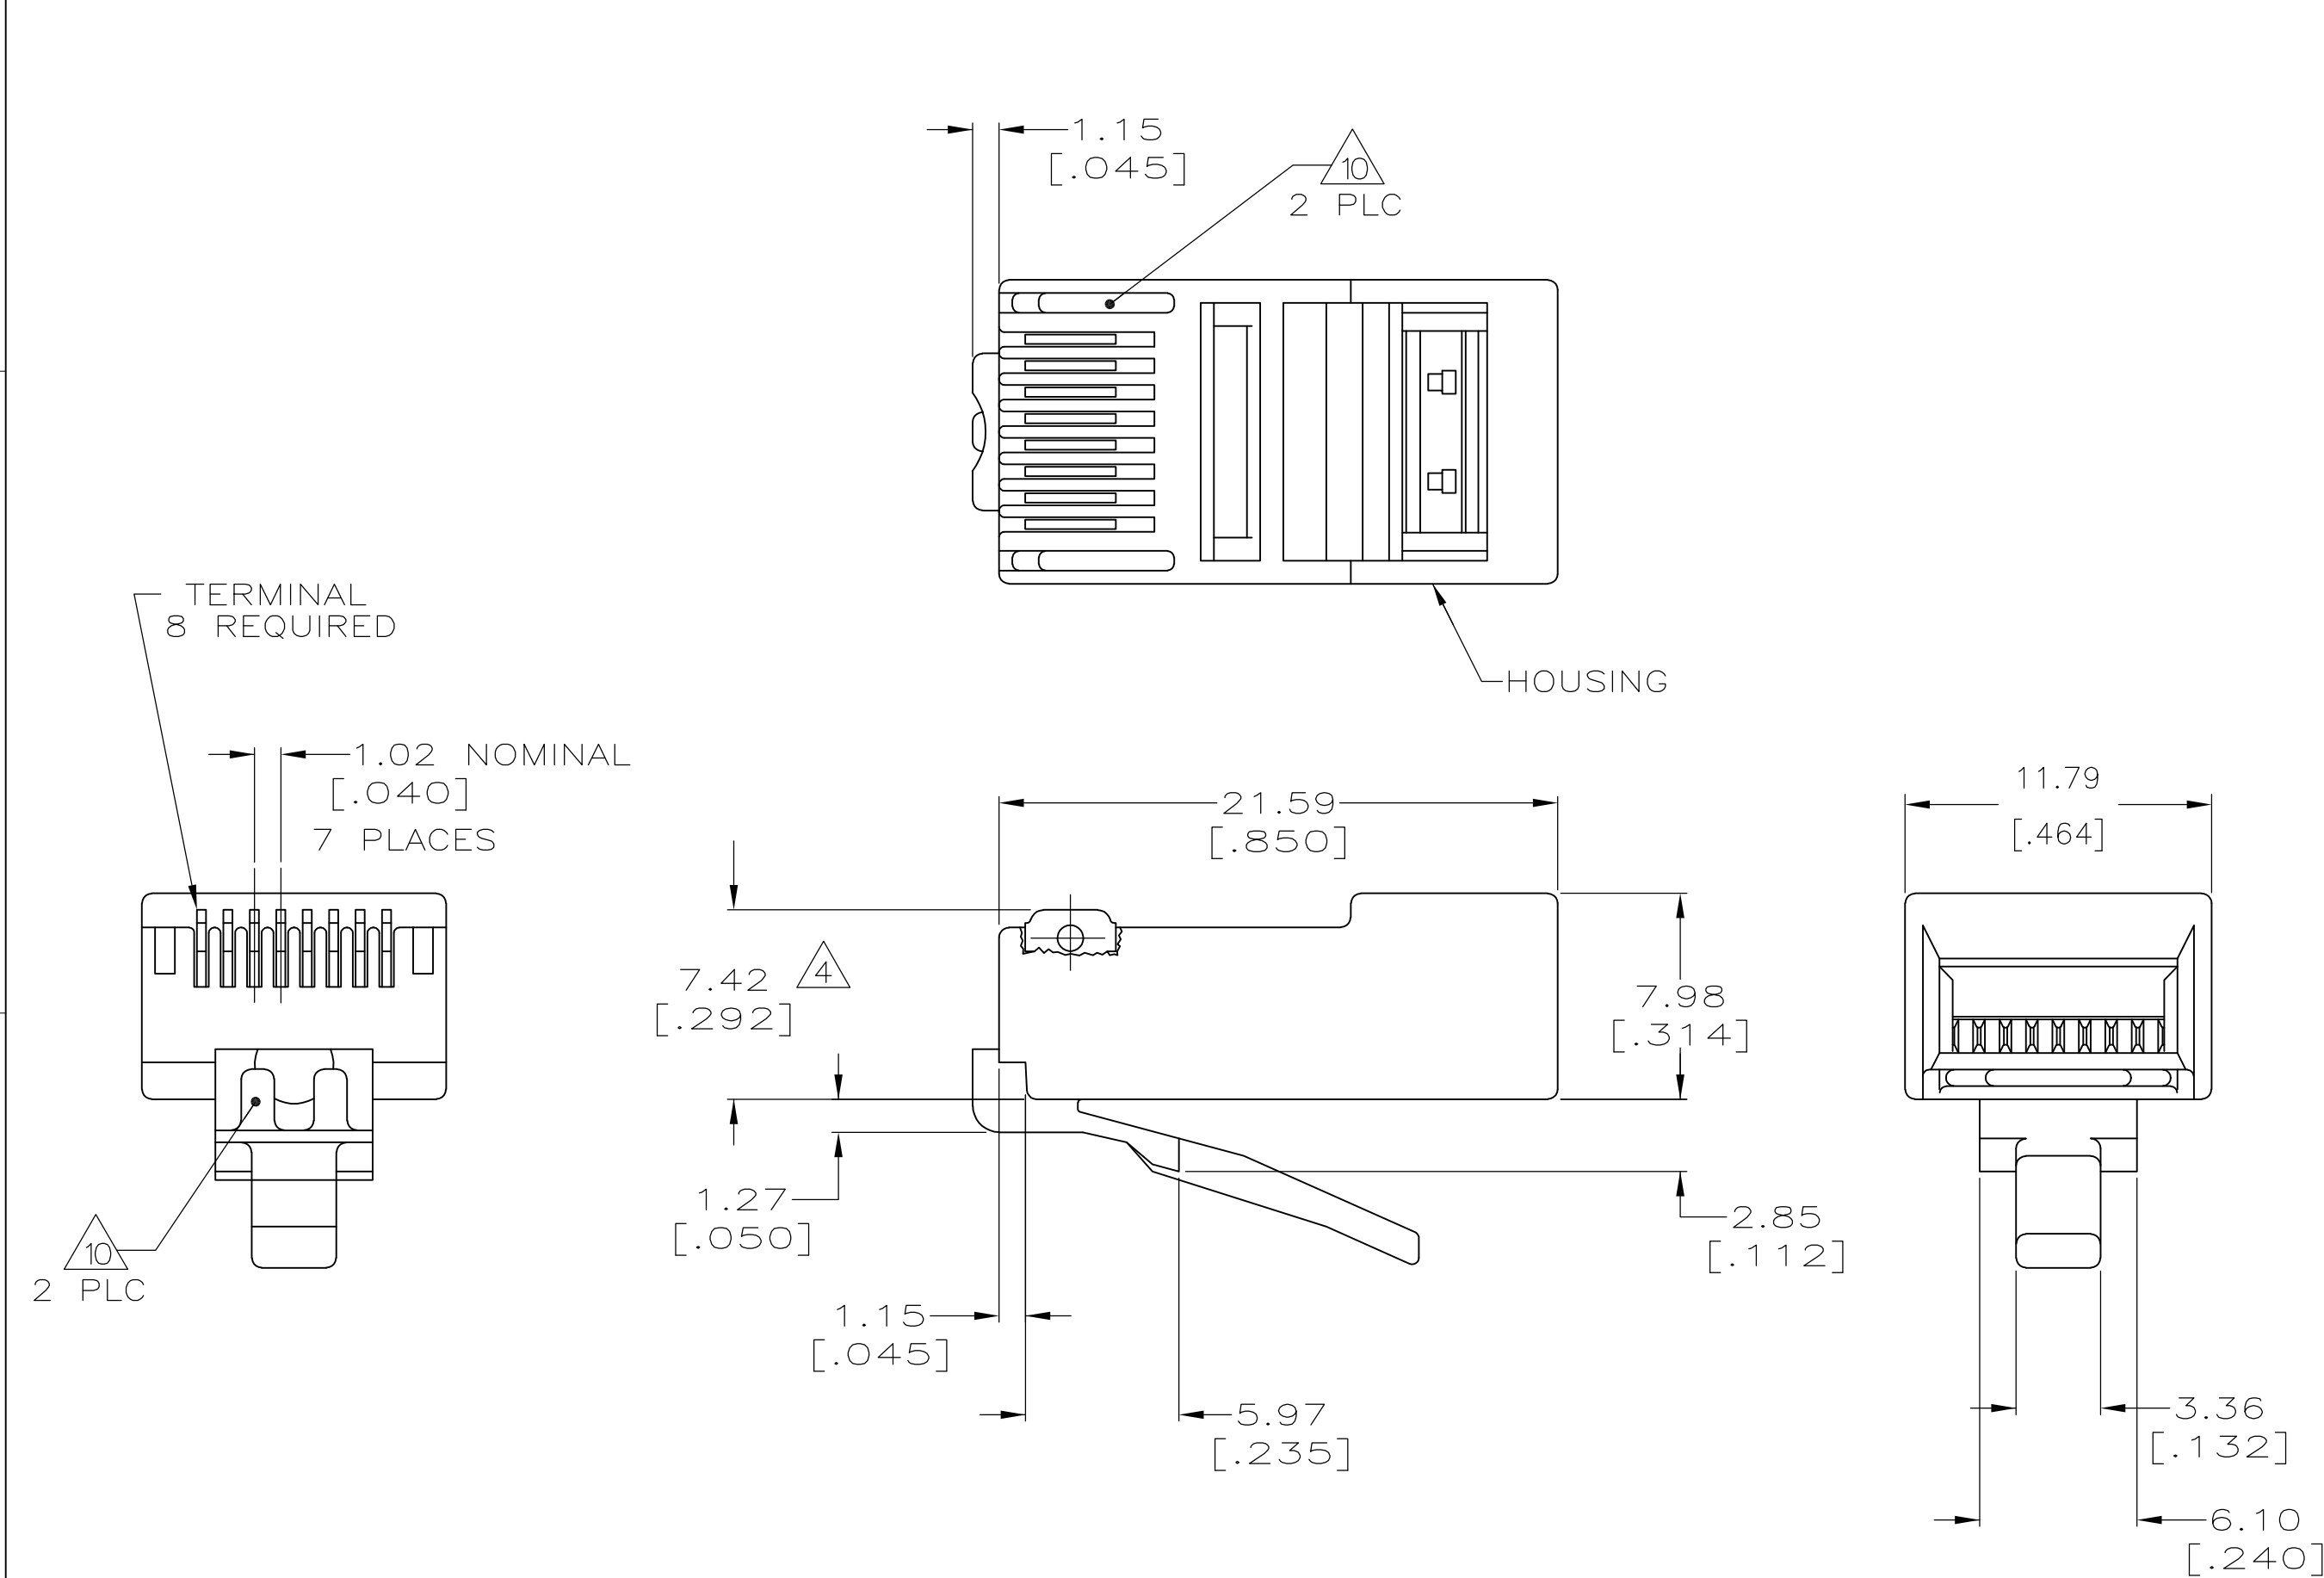

SUPERSEDED BY: 5-554720-2

OBSOLETE

8	5-554720-3
7	5-554720-2
6	5-554720-1
11	3-554720-3
REELED 10	554720-1
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 03NOV2005	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C. CASH 03NOV2005				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC ± - 1		PRODUCT SPEC			
	1 PLC ± - 1		108-1163			
	2 PLC ± - 1		APPLICATION SPEC			
	3 PLC ± - 1		114-6016			
	4 PLC ± - 1		WEIGHT -			
MATERIAL - 2		FINISH - 2	SIZE A2	CAGE CODE 00779	DRAWING NO C=554720	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 1	REV U

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-554720-3](#)