

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		G	REVISED PER ECO-14-011190	17JUL2014	JB	LS

D

D

C


C

B




B

A

A

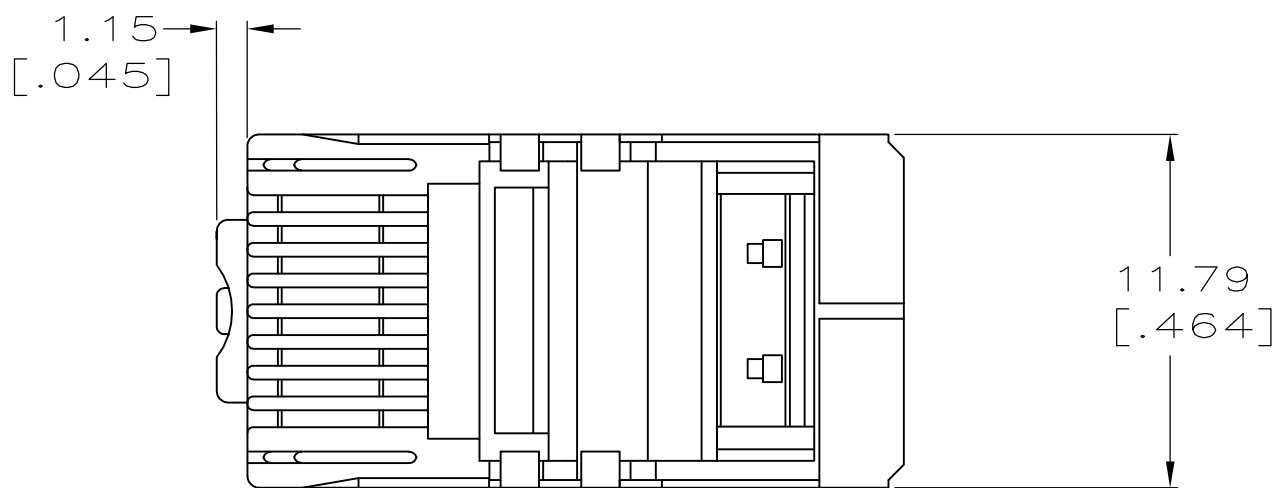

- 1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL: HOUSING- POLYCARBONATE, CLEAR
TERMINAL- .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH $.178\mu\text{m}$ [.000007] THICK GOLD IN LOCALIZED PLATE AREA OVER $.762\mu\text{m}$ [.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER $2.54\mu\text{m}$ [.000100] THICK NICKEL ON ENTIRE CONTACT.
SHIELD- COPPER ALLOY WITH $1.27\mu\text{m}$ [.000050] MINIMUM SEMI-BRIGHT (SATIN) NICKEL.
3. PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE, 0.74-0.99 [.029-.039] DIAMETER, WITH A 5.08 [.200] DIAMETER MAXIMUM JACKET.
- 4 TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- 5 500 ASSEMBLIES PER PACKAGE.
- 6 100 ASSEMBLIES PER PACKAGE.

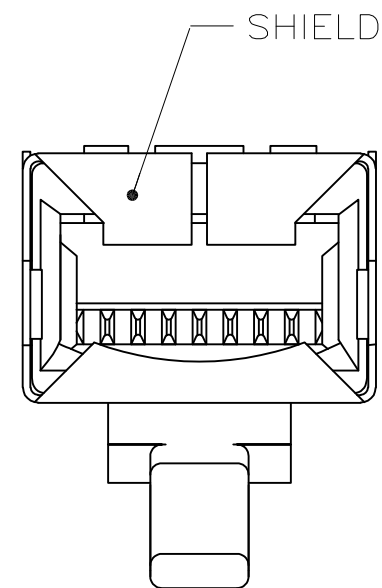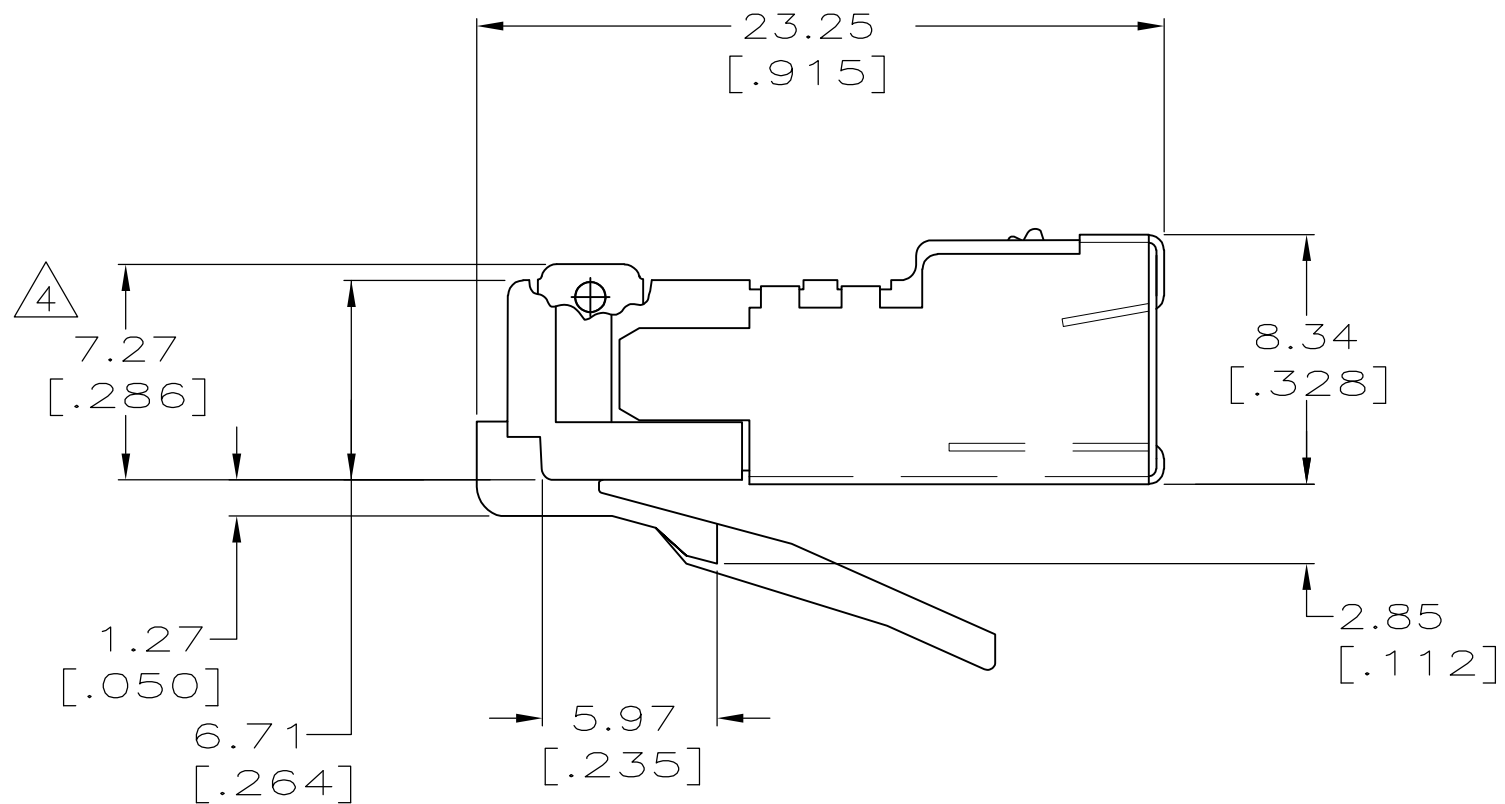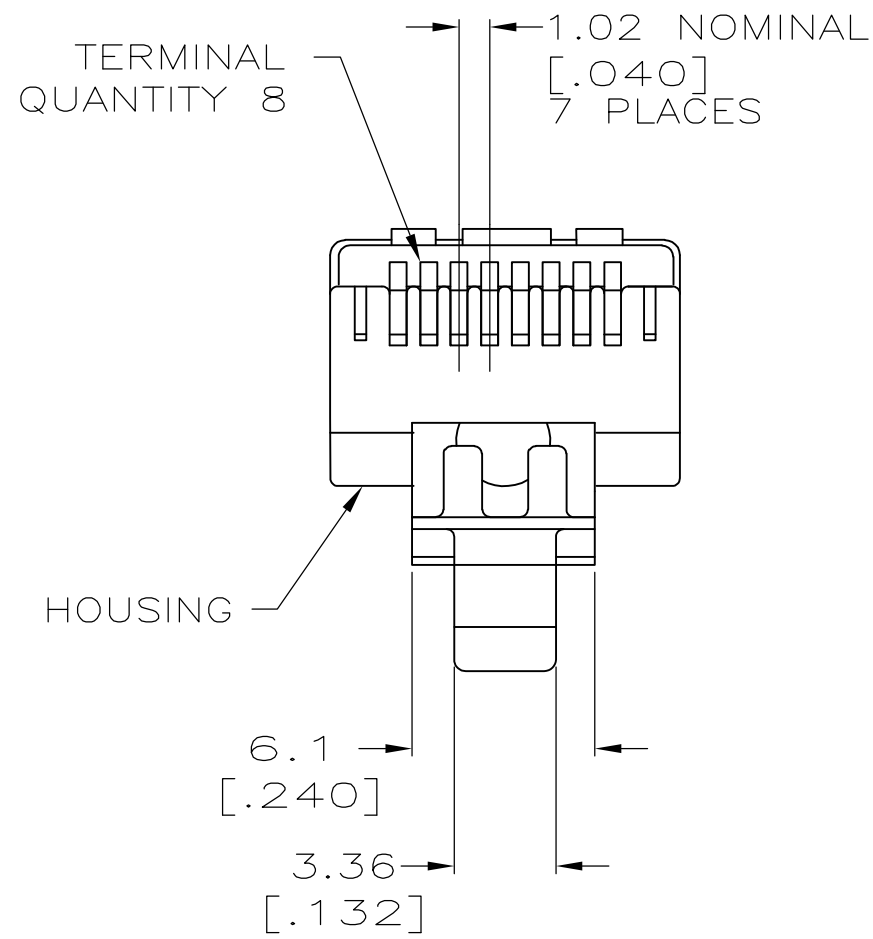

6	5-569530-3
5	5-569530-2
PACKAGED	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 25OCT2006	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C. DOOLEY 30OCT2006				
		APVD C. DOOLEY 30OCT2006	NAME			
		PRODUCT SPEC 108-1163	MODULAR PLUG ASSEMBLY, 8 POSITION, SHIELDED, ROUND CABLE, SOLID WIRE			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-6016	SIZE A2	CAGE CODE 00779	DRAWING NO C=569530	RESTRICTED TO -
MATERIAL -2		WEIGHT -	CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1
					REV G	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity Divested:](#)

[5-569530-2](#)