

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION.

LOC	DIST	REVISIONS		
CE	16	P	LTR	DESCRIPTION
		E		REVISE PER 0A40-0094-05
				DATE
				24FEB05
				DWN
				JWD
				APVD
				JD

1. DIMENSIONS IN [ ] ARE IN INCHES.
2. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
3. 65 dB MIN RETURN LOSS.
4. TRACE LABEL PLACED ON ITS UNIT PACKAGE.

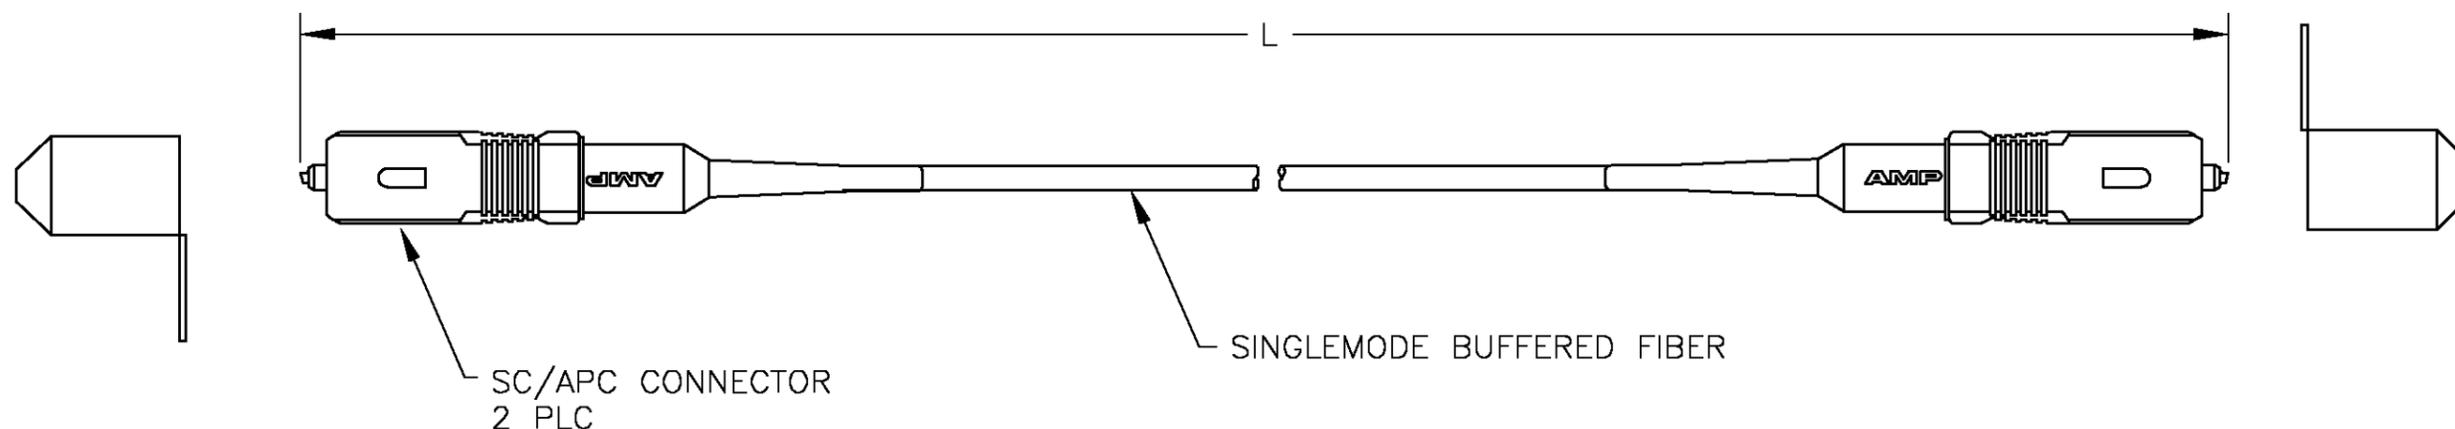

0.50	15.00±0.15 [590.6±6.0]	1-504678-5
0.50	3.05±0.05 [120.0±2.0]	504678-8
0.51	20.00±0.30 [787±12]	504678-7
0.50	12.00±0.15 [472±6]	504678-6
0.50	10.00±0.15 [394±6]	504678-5
0.50	5.00±0.08 [197±3]	504678-4
0.50	3.00±0.05 [118±2]	504678-3
0.50	2.00±0.05 [79±2]	504678-2
0.50	1.00±0.05 [39±2]	504678-1
MAX IL (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	28AUG00	<b>AMP</b> Tyco Electronics Corporation Harrisburg Pa, 17105-3608											
		CHK	29AUG00												
DIMENSIONS: METERS ■ [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE BUFFERED FIBER, SC/APC, OPTIMATE											
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -		1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	APVD
0 PLC	± -														
1 PLC	± -														
2 PLC	± -														
3 PLC	± -														
4 PLC	± -														
ANGLES	± -														
MATERIAL		FINISH		PRODUCT SPEC											
-		-		APPLICATION SPEC											
		WEIGHT		SIZE											
		-		A3											
		CUSTOMER DRAWING		CAGE CODE											
				00779											
				DRAWING NO											
				©-504678											
				RESTRICTED TO											
				-											
				SCALE											
				NTS											
				SHEET											
				1 OF 1											
				REV											
				E											