

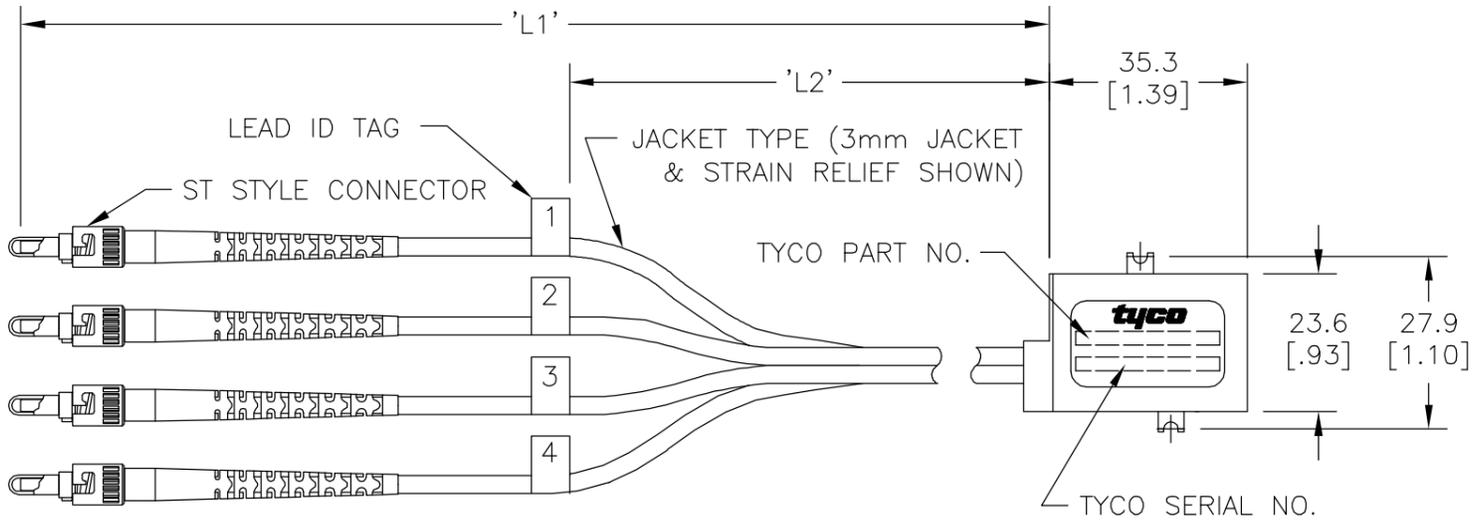


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
EA	51	P	LTR	DESCRIPTION	DATE	DWN	APVD
		2		UPDATE	04OCT06	SM	RP

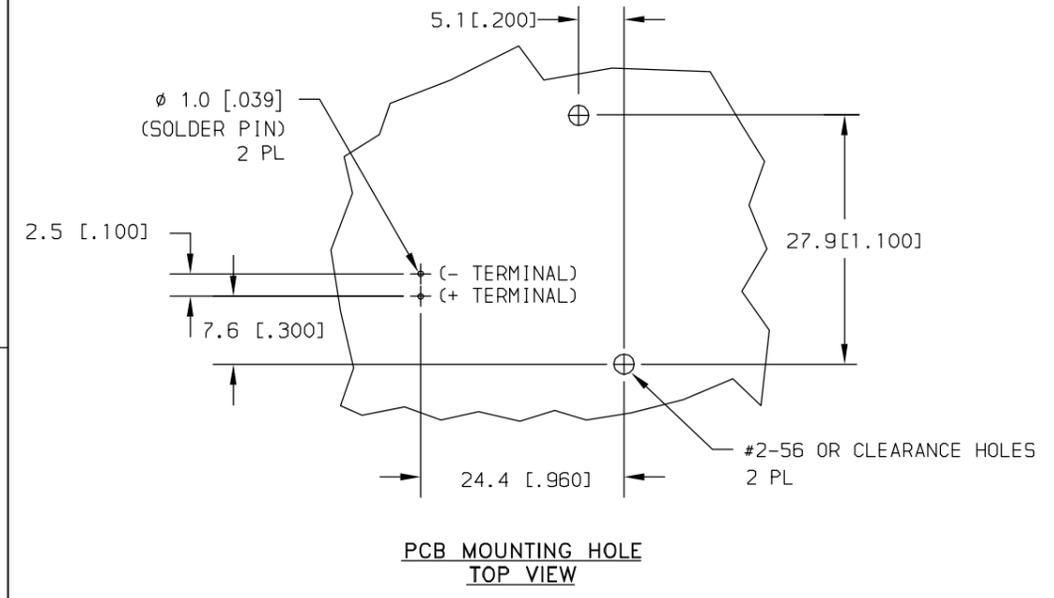

PART NO.	FIBER TYPE	'L1'	'L2'	CONNECTOR TYPE
5099417-1	50/125/250	1000 ±50mm	900 ±25mm	ST
5099417-2	62.5/125/250	1000 ±50mm	900 ±25mm	ST
8-5099417-2	62.5/125/250	393 ±25mm	293 ±25mm	ST

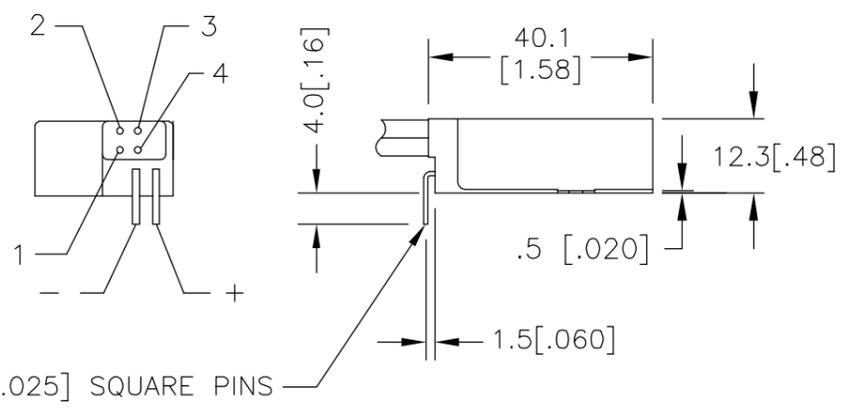


NOTES:
 1. DIMENSIONS IN [] ARE IN INCHES.
 2. PERFORMANCE SPECIFICATIONS:
 TESTED PER FOTP-34 METHOD A2
 INSERTION LOSS DATA INCLUDES TWO CONNECTOR PAIRS.
 INSERTION LOSS:

POWER OFF,	1 TO 2	1.8dB MAX
POWER OFF,	3 TO 4	5.0dB MAX
POWER ON,	1 TO 4	1.8dB MAX
POWER ON,	3 TO 2	1.8dB MAX

OPTICAL CROSSTALK $\leq -45\text{dB}$ PER FOTP-42
 OPERATING WAVELENGTH 750-1450nm
 TESTED WAVELENGTH 1300nm
 POWER REQUIREMENTS 4.0 TO 5.5 VOLTS, 80ma MAX AT 5.0 VOLTS
 SWITCHING SPEED 10 MILLISECONDS MAX

PRELIMINARY

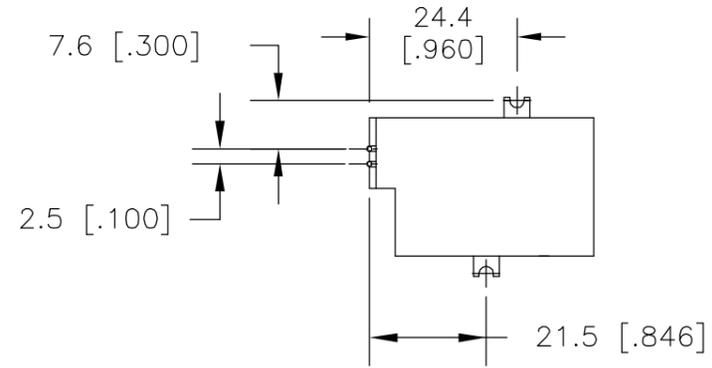

3. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. MONGOLD 06DEC05	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm[inches]		CHK R. PAUL 06DEC05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F. ABENDSCHEIN 06DEC05	NAME	
0 PLC ± - 1 PLC ± 0.5 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC		SWII 2X2
MATERIAL		APPLICATION SPEC		TIN (BENT PIN)
FINISH		SIZE	CAGE CODE	DRAWING NO
		A3 00779		C=5099417
		CUSTOMER DRAWING		RESTRICTED TO
		SCALE	SHEET	REV
		1:1	1 OF 1	2