


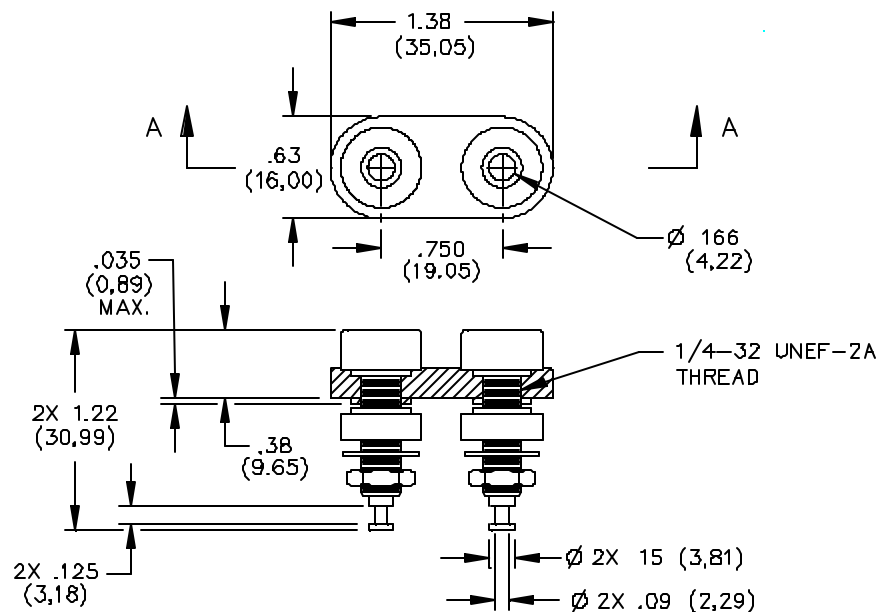

FEATURES:

- High temperature insulation material for use up to 220°C (428°F).
- Mates with Pomona's MDP and all standard double banana plugs.
- Ideal for mounting to panels or chassis boxes.

MATERIALS:

Banana Jack Insulation: Polyphenylene Sulfide molded to Banana Jack Bodies.

Color: One Blue, One Black.

Mounting Plate: Polyphenylene Sulfide.

Color: Black

Insulator: Polyphenylene Sulfide. Color matches color of Banana Jack insulation.

Hex Nut 1/4-32: Material Brass

Nickel plated. Class 2, 200/300 micro-inches.

Lockwasher 1/4 Int Tooth: Material: Steel.

Banana Jack Body/Solder Turret – Material: H.H. per QQ-B-626, Alloy 360, 1/2 Hard.
Finish: Bright tin plated per MIL-T-10727.

RATINGS:

Operating Temperature: +220°C. (+428°F.) Max.
Operating Voltage: 2500 VDC
Current: 15 Amperes. Cont.

ORDERING INFORMATION: Model 5233-*
*=Color, -0 Black (has one Black and one Blue Jack)
Ordering Example: 5233-0, Color is Black

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

5233-0