



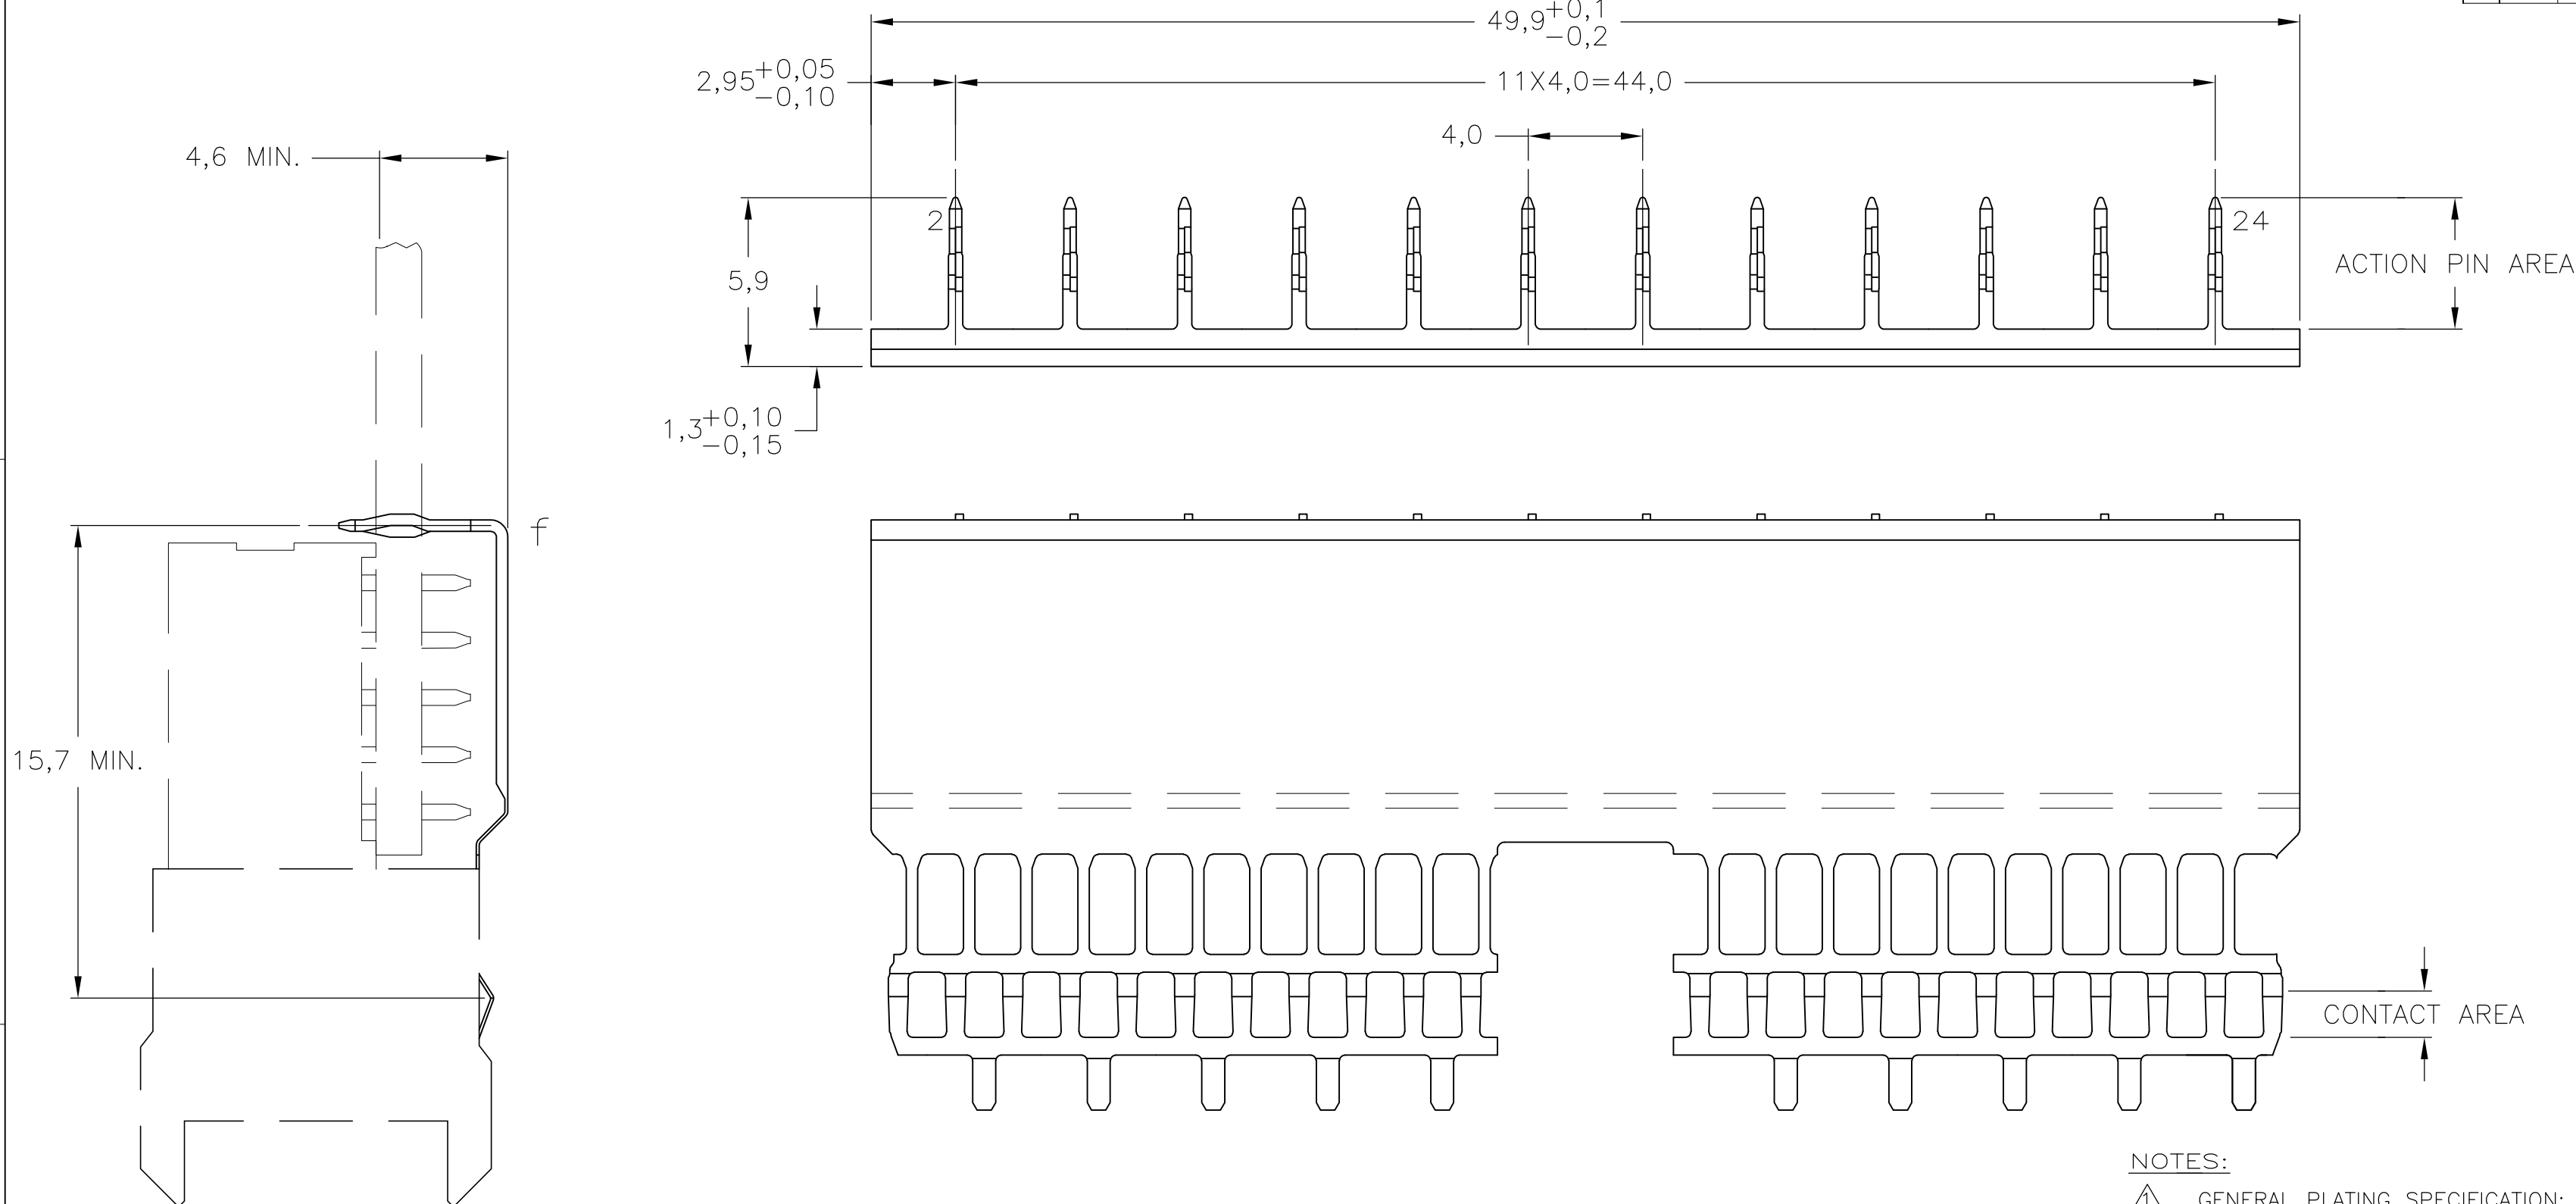

NOTES:

- △ GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION
PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL
SHOWN IN PART NUMBER TABLE.
- △ MATERIAL; PHOSPHORBRONZE.
- △ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
- △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH
UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
- 5 MAX. BOARD THICKNESS 3,5 mm.
- △ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
- △ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

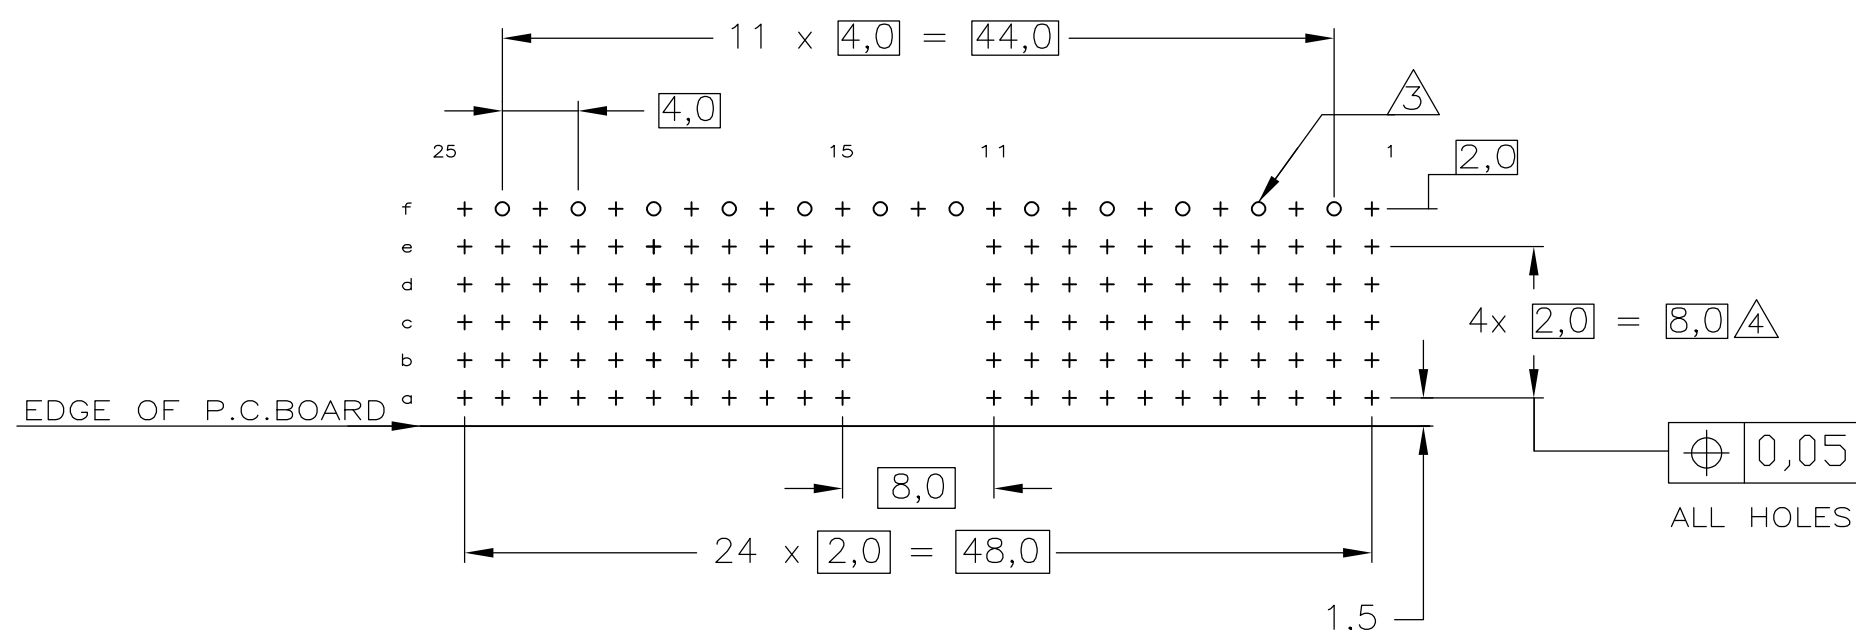

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE APPLICATION SPECIFICATION

  		4-5338108-0
  		5338108-9
 		5338108-2
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN	13AUG04	 TE Connectivity					
		CHK B.MOOLJ	25MAR05						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ± — 1-PLC ± — ±0.2 2-PLC ± — 3-PLC ± — 4-PLC ± — ANGLES ± —	APVD B.MOOLJ	25MAR05	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE A					
		PRODUCT SPEC 108-19082							
		APPLICATION SPEC 114-19029				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT —				A2	00779	C-5338108	—
MATERIAL —	FINISH —	CUSTOMER DRAWING		SCALE	5.1	SHEET	1 of 1	REV	D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5338108-2](#)